

PREMIUM PROGRAMME

2017

CUTTING


GRINDING

SANDING

CLEANING

POLISHING

FINISHING

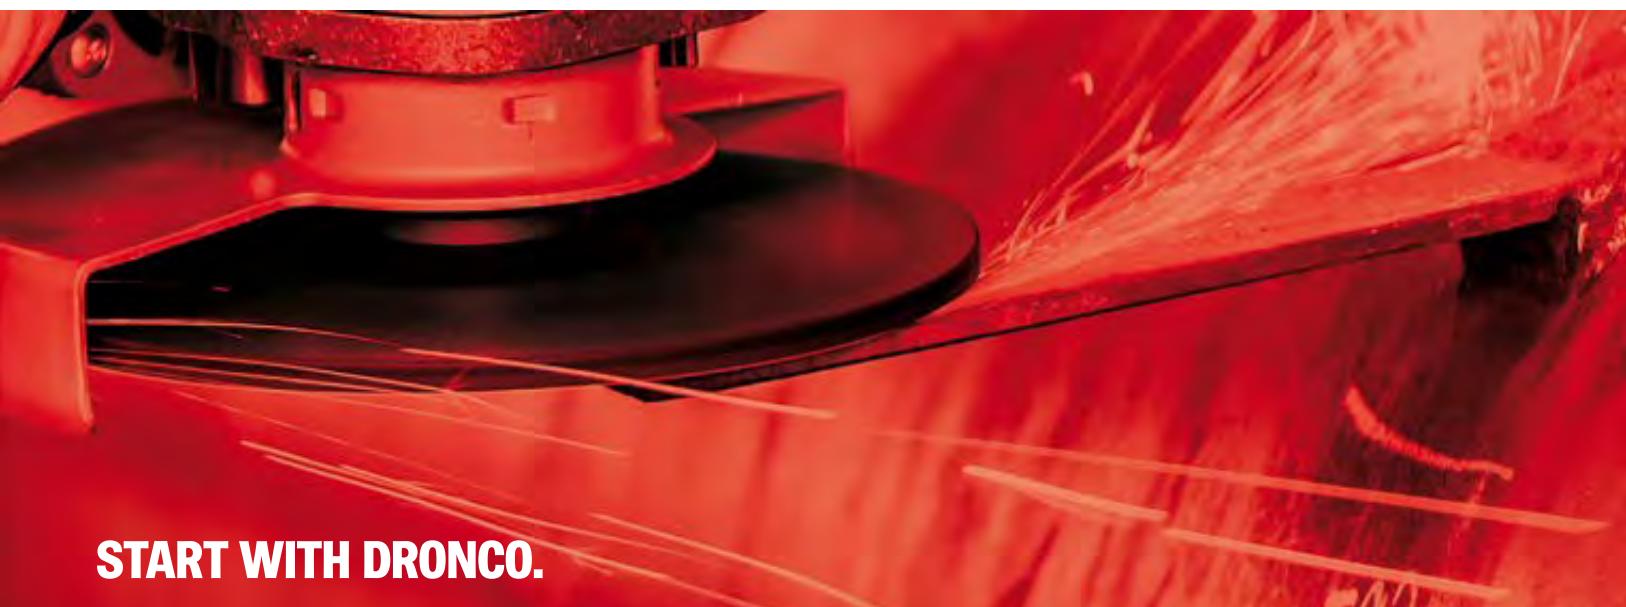


START WITH DRONCO.



FINISH WITH OSBORN.



STARTING AT PDF-PAGE 3

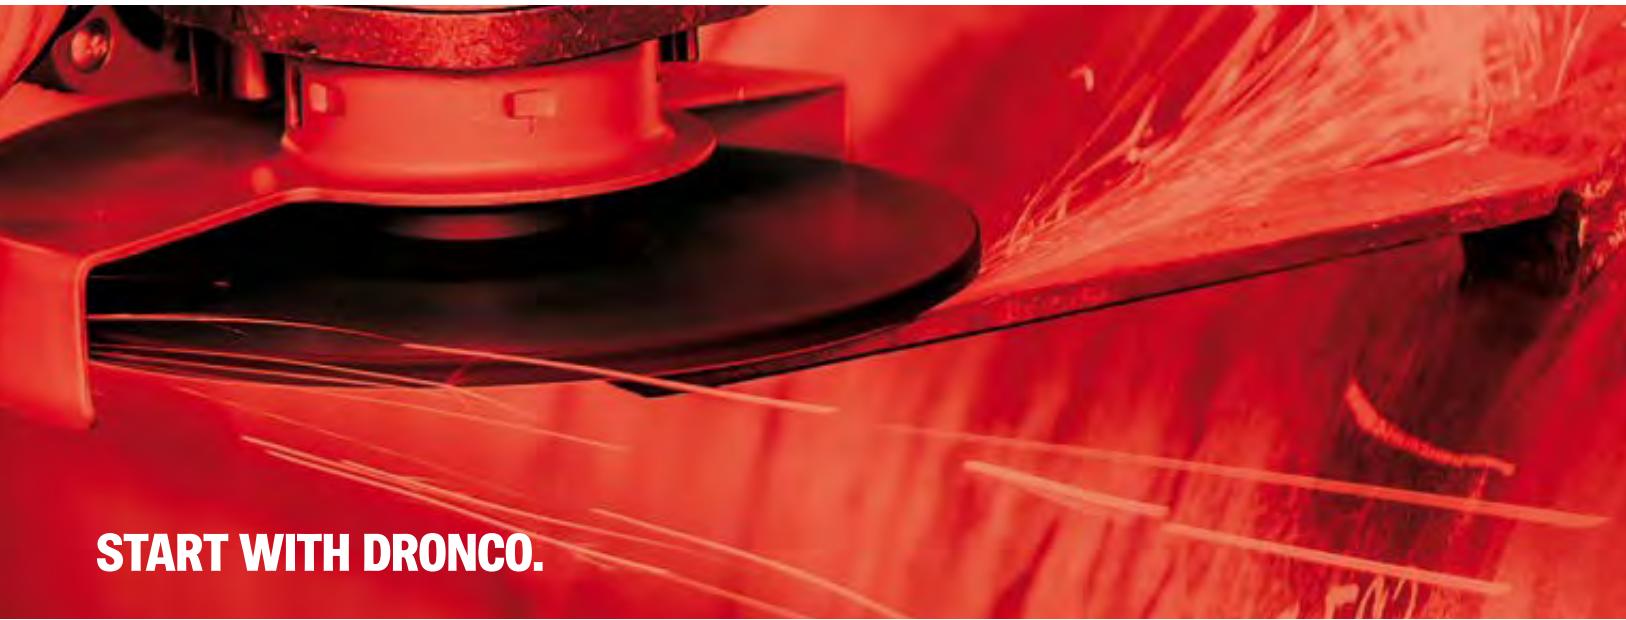

START WITH DRONCO.



STARTING AT PDF-PAGE 136



FINISH WITH OSBORN.

Content

SURFACE TREATMENT. COMPLETE. FROM A SINGLE SOURCE.

Dear Customers,

You can turn it and flip it the way you want ... On around 300 pages of our new combined catalogue, you will find the whole range of products for mechanical surface treatment. Regardless of whether you would like to cut, grind and sand or clean, brush and polish - we are there for you.

We, the companies of DRONCO and Osborn. With over 180 years of mutual experience in surface finishing, we have a solution for almost all of your application requirements. We are also pleased to assist you finding the right product.

In the DRONCO section, you will find our product portfolio of cutting discs, grinding discs, flap discs, polishing flap discs, diamond cutting discs and diamond tools, bonded abrasives, ceramic abrasives and technical brushes.

If you are a customer of DRONCO today, we invite you to get to know the other side: Simply flip the catalogue and discover the Osborn product world of machine brushes, hand brushes, polishing and satin finishing tools, brush technology for industrial applications and special solutions.

The good thing is, you do not need another customer number or another contact person. Just talk to your well-known contact and you can order both DRONCO and Osborn products with your existing customer number. Try it out! We look forward to working with you!



osborn

→ Find the Osborn products starting at PDF-page 136.

Metal cutting discs 18



Stone cutting discs 44



Grinding discs 52



Flap discs 62



Cleaning- and 75
polishing tools



Diamond cutting discs 84



Diamond tools 110



Flexible and semi-
flexible abrasives 118



Vitrified bonded
abrasives 131



Technical brushes 133



WITH DRONCO INTO POLE POSITION

DRONCO is one of the biggest and most innovative manufacturers of abrasives in Europe.



WELCOME AT DRONCO

DRONCO is one of the biggest and most innovative manufacturers of abrasives in Europe. Our company is part of the Jason Industries, Inc. to which Osborn belongs as well.

With its production plants in 14 countries and around 2,000 employees worldwide, the Jason Industries, Inc. serves markets in 120 countries with quality tools for surface treatment.

DRONCO currently owns the most advanced manufacturing technology for cutting and grinding discs in Europe. We are producing approximately 200,000 cutting and grinding discs and 40,000 flap discs every day in our production plant in Wunsiedel (Bavaria).


Our range of cutting and grinding discs, diamond tools, ceramic abrasives, abrasive paper sheets and technical brushes for professional craftsmen as well as demanding do-it-yourselfers is produced in globally recognized high quality.



INNOVATION DRIVER

DRONCO is among the most innovative and agile manufacturers in the abrasive sector.

Our own R+D department is working in modern laboratories on future-oriented technologies for abrasive tools. Existing products are continuously improved as well.

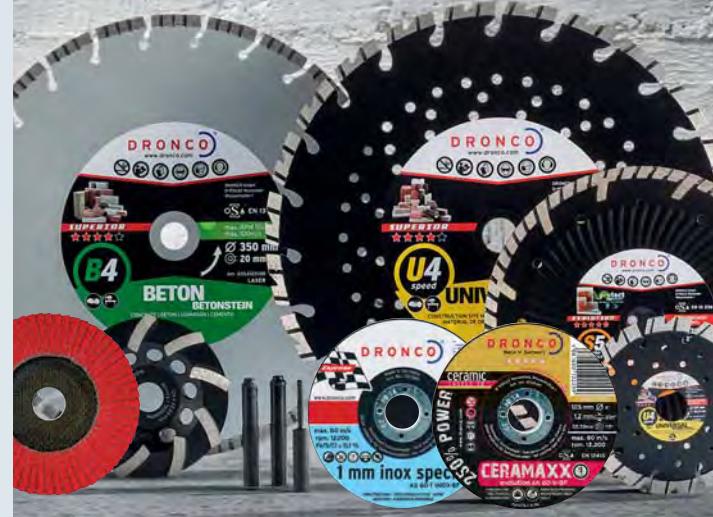

CUSTOMER-ORIENTED

For us, client orientation is of absolute importance. DRONCO was awarded 1st place as "Commercial Partner of the Specialized Trade" multiple times throughout the last years.

Evaluation criteria were: trade loyalty, innovative strength, marketing and sales support as well as the handling of complaints.



INNOVATIVE. CUSTOMER-ORIENTED. RELIABLE.

FORWARD-THINKING PRODUCTION TECHNOLOGY

DRONCO sets standards for the future already today.

"Progress - Made in Germany" is for us the perfect interaction of indicative technology and sustainable research and development.




HIGH-TECH & SUSTAINABILITY

Intelligent manufacturing technology of the latest generation, highly qualified employees and the unique DRONCO Production-System allows a flexible, rational and exact production, according to the highest quality standards here in Germany.

DRONCO has developed a pressing technology that ranks worldwide among the most advanced systems. With an almost complete renewal of our machinery, we are one step closer to attain our ambitious target, to take over the technology leadership in our branch.

With an investment of six million Euros, we further extended and modernized our production site in Wunsiedel until mid of 2016.

Now DRONCO has the most advanced presses for cutting and grinding discs in Europe. This technology helps us to ensure the high quality of our products and to reduce emissions at the same time, making a sustainable contribution to preserving the environment. We will continue to do everything to strengthen our competitive position for the future.

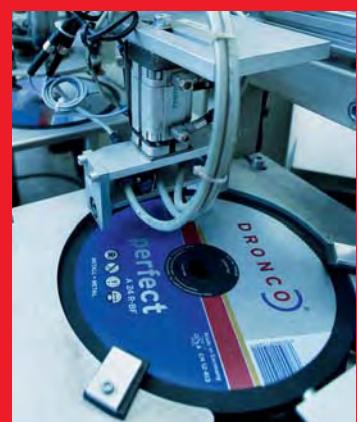

RESEARCH & DEVELOPMENT

Our R+D team is working in modern laboratories on future oriented technologies for abrasive tools, resulting in product innovations and a continuous improvement of existing products with regard to cutting ability, lifetime, speed and precision.

The results are diverse pending patents and the market launch of several world innovations in the field of groundbreaking cutting and grinding technologies.



QUALITY & PERFORMANCE TESTING

In order to determine the performance of our products, we are testing with a state-of-the-art industrial robot. The robot delivers precise results and allows our quality assurance to carry out various tests under the exact same conditions.

In addition to a pure performance determination, the robot also helps us to ensure a consistently high standard by means of permanent checking. Complex processes can be simulated easily; realistic simulations are used especially for product development and the permanent optimization of existing tools.



SUSTAINABLE RESEARCH + DEVELOPMENT

Here at DRONCO, the R+D department is of great importance. Newly built laboratories with state-of-the-art technical equipment meet all requirements for testing, chemical and analytical procedures and applications.

OUR PRODUCTS SAFETY FIRST

Work safety is an important task. This is why DRONCO treats this issue in a particularly responsible manner. Users and dealers are on the safe side with us.



HIGHEST SAFETY STANDARDS

Cutting and grinding require a very high circumferential speed of the rotating tool in many areas of application. Therefore, our products are specifically designed to safely withstand the extreme mechanical and thermal stresses and strains. All DRONCO products correspond to current standards.

Continuous tests guarantee the observance of the highest safety standards. For this purpose, a further, state-of-the-art test system for side load tests was put into operation.

Complex measures for product testing are carried out on the new system. First, cutting discs are subjected to a pre-defined lateral load and then subjected to a fall hammer test. The test results are automatically recorded and evaluated.

Our quality management system ensures that we meet the high demands of a modern, worldwide acting industrial enterprise on each level. Certification in accordance to DIN EN ISO 9001:2008 is therefore just as natural as our membership with oSa.



CERTIFIED SAFETY

We manufacture according to the strictest directives worldwide and monitor the safety and quality of our products according to the latest standards and regulations:

EN 12413

European safety standard for cutting and grinding discs

EN 13743

European safety standard for bonded abrasives

EN 13236

European safety standard for diamond tools

E DIN ISO 13942, 603-16, 6103, 15635

Dimensions, tolerances and unbalance



MANUFACTURING & QUALITY ASSURANCE ACCORDING TO STRICT REGULATIONS

MODERN LOGISTICS

DRONCO products are used in more than 100 countries in the world.
Modern logistics ensures complete and timely deliveries to our customers.



LOGISTICS CENTER WUNSIEDEL

Our high standards to manufacturing continue also at the field of logistics. Our new logistics center, close-by to the production, has been opened in 2008 and offers
4,000 sqm storage space
950 sqm office space
2,500 sqm traffic area
1,400 sqm space for packing
as well as a high rack storage area with space for
9,200 pallets and
4,800 ground level shelves.

Automated warehousing ensures complete and timely delivery of the products - to the satisfaction of our customers. Intelligent software enables transparent logistics.



DRONCO CODE OF CONDUCT

The legal framework has become very complex, even for traditional companies and the globalized economic relations have implied new requirements.

The integration of a code of conduct in the company organization ensures a systematical control and documentation of the compliance. DRONCO is committed to prevent bribery and to comply with ethical principles towards customers, competitors and business partners.

Our code of conduct comprises regulations against corruption, forced and child's work and defines social and ethical standards to be applied. It is valid not only for all employees but also for our suppliers worldwide. Dronco takes part of the annual company statements of the BME. Our compliance-management is training the employees, controls the compliance and is the contact-person for all demands and questions.

More information about the BME can be found on the web:
www.bme.de

COMPLIANCE MANAGEMENT

DRONCO has joined the Code of Conduct of the BME and has implemented a code of conduct into the company organization.




SOLUTIONS FOR A STRONG PRESENTATION

DRONCO – a strong brand. Our extensive support promotes your turnover!

EXCELLENT SALES PROMOTION

Our sales promotion is coordinated constantly to the needs of the trade. Attention-strong sales assistance at the POS and the newly arranged product shelf is lastingly supporting your sales. Dealer promotion activities taking place several times during the year are providing additional turnover.

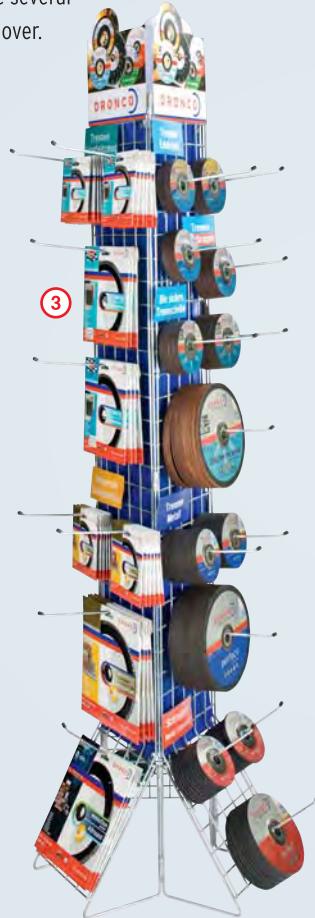

① DRONCO Wire Presentation for tins:

Our bestseller: The 1mm special disc for steel and stainless steel in a 10-pack tin. Simply hang in the support between the modules or in a rear panel (suitable adaptor supplied) and watch your sales take off!

Dimensions: 15 x 135 x 16 cm

② DRONCO Sales Display:

Diamond blades F5 cera speed
Dimensions (BxHxT): 16x36x23 cm

③ DRONCO Triangle Display:

Can be stocked individually with new or standard products.
Dimensions: 28 x 175 cm

④ DRONCO Sales Display for Polishing Flap Discs:

Many customers say "grinding" but really mean "derusting and polishing". Show them that you are the expert!
Dimensions: 42 x 34 x 28 cm

⑤ The DRONCO Classic:

Stainless Steel Tin Promotion Display
The sales hit at every counter.
Dimensions (BxHxT): 20x31x20 cm

INNOVATIVE PRODUCTS

As a DRONCO dealer you will profit from our extensive manufacturer's authority. With perfect product quality, highest safety standards and constant innovation we are setting standards on the market.

BEING IN THE MEDIA

DRONCO regularly places colour advertisements in technical and specialized magazines, and provides PR articles in order to sensitize the end user on the premium brand - excellent measures for an excellent product range!

PROMOTION VAN

We support the specialized trade with promotion vans, which are constantly in use on in-house fairs, on open days, or locally together with the specialized trade and the end user.

PRODUCT PROMOTION

TRAINING OF YOUR SALES STAFF

Confidence in the sales talk with the end user generates a rise in turnover. Your sales personnel will receive professional knowledge in an entertaining and interesting training course which contains theory and practice.



ATTRACTIVE DESIGN

We present ourselves on the market visually clear and well planned. This includes packaging as well as contents. An effectively arranged colour guideline system leads easily and surely through the product assortment.



ATTENTION GUARANTEED

Professionals set the standard – also with the presentation at the point of sale.



EXCELLENT SALES PROMOTION – ADDITIONAL TURNOVER

Our elaborate concept provides for a premium sales promotion and increases your image as a top-quality supplier. Intelligent goods presentation and eye-catching sales assistance is lastingly supporting your sales. The DRONCO product shelf offers you an abundance of options to present your premium assortment of goods in a clear and attractive way.

EXCLUSIVE SERVICE FOR OUR DEALERS

The labeling of the product shelves as well as the supply lists are exactly adjusted to your demands. Colour coding systems facilitate orientation.

MODULAR ACCESSORIES



Colour coding systems facilitate orientation



Lockable hooks

Modular display assembly in different dimensions:
Individual modules that fit into common systems
with widths of 1.0 and 1.25 m

Diamond show case with
Plexiglass door



The complete DRONCO product range is presented progressively and dynamically. 3x1.25 m

3 PRODUCT LINES FOR EVERY APPLICATION

Three quality lines according to the good-better-best principle: From the solid craftsman's quality to the high-performance tool for the most intensive use.

GOOD	BETTER	BEST
PERFECT	SPECIAL / SUPERIOR	EVOLUTION
METAL CUTTING DISCS		
STONE CUTTING DISCS		
GRINDING DISCS		
FLAP DISCS		
DIAMOND CUTTING DISCS		
ABRASIVES		

ADDITIONAL BENEFIT

D R O N C O®

Beside the specific cutting and grinding performance many of our products have an additional benefit for the user.

EXPRESS - THIN, PRECISE, FAST

- considerably faster
- exact cutting
- no chipping on the edges
- effortless performance



PROTECT - PRESERVE YOUR HEALTH

- less noise
- less vibration
- less dust




FREECUT - PROBABLY THE WORLD'S SAFEST CUTTING DISC

- no pinching in the cut
- reduced danger of 'kick-back' effect (setback of the angle grinder)
- no lateral friction



CUT+GRIND - THE CLEVER COMBINATION OF TWO FUNCTIONS

- cutting and grinding with one disc
- no change of disc necessary
- fast cutting with high removal rate

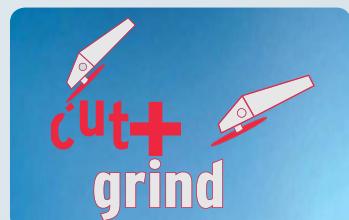

BATTERY FRIENDLY - FOR CORDLESS POWERED ANGLE GRINDERS

- flexible in usage
- easy to handle
- precise working



Some general information

The following information gives you the best possible overview about the features of our products.

① Description

Compiled for cutting discs as follows:

A/AS – aluminium oxide is the abrasive grain for cutting metal.

AZ – zirconium corundum is the abrasive grain for better life time and cutting efficiency.

46 – indicates the grit size. The higher the number, the finer the grit. E.g.: 24 rough | 30 medium | 36 fine ...

R – the second letter indicates the hardness of the disc. The further into the alphabet, the harder the disc.

BF – resin bonded, fibre-reinforced

② Product lines

perfect | evolution | special

Explanation see next page.

③ Blue background

Is the colour coding for metal cutting discs.

④ Safety standards

Our products comply with the highest safety standards and regulations:

EN 12413 - cutting and grinding wheels

○S^A - organisation for the safety of abrasives.

⑤ Measurements

Consist of (diameter of the disc)

x (thickness of the disc)

x (bore size).

Measurements given in mm and inch.

⑥ Expiry date

This quality cutting disc can be used without any restrictions until the indicated date.

(V month/year)

⑦ Max. rpm.

Indicates the permitted maximum speed.

⑧ FE/S/CI ≤ 0,1%

Free from iron, sulphur and chlorine.

Special disc for cutting stainless steel.

⑨ Safety information

Security information: For your own safety.

Please follow!

⑩ Red bar

Indicates 80 m/s as permitted peripheral speed.

Green bar

Indicates 100 m/s as permitted peripheral speed.

⑪ Made in Germany

Stands for proven quality - most of our products are manufactured and tested in Germany.

⑫ www.dronco.com

24 hr service on our website - we are always there when you need us!

⑨ Safety information



METAL CUTTING DISCS



Product lines

For craftsmen or industrial use - three precisely co-ordinated product lines offer the right cutting disc for every user and every application. All discs comply with the relevant regulations, have a high specific cutting capacity and guarantee a maximum of safety.



perfect line

The best-seller with an excellent price/ performance ratio. It has proven itself a million times in the hands of craftsmen and semi-professionals.


- manufactured according to EN 12413
- complies to oSa regulations



special line

The special line for craftsmen and industrial applications. Due to the fact that different materials impose different demands, DRONCO produces discs especially matching the respective material. Special types of corundum and bonds are combined to suit the task in hand. This optimises performance, extends service life, increases efficiency and reduces cutting time.

- manufactured according to EN 12413
- complies to oSa regulations

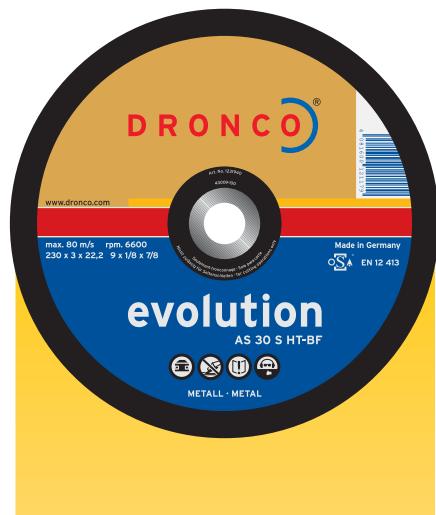

evolution line

Designed by experts and made of top quality raw materials, these all-round cutting discs combine outstanding service life with high cutting speed.

- manufactured according to EN 12413
- complies to oSa regulations

METAL CUTTING DISCS



Application chart metal cutting discs

	Page	unalloyed and alloyed construction steel	very solid construction steel	tool steel	high alloy special steel	angular steel profiles	angular stainless steel profiles	rails	cast	aluminium alloy	copper	brass bronze	tiles	marble	schist
◆ FREE HAND CUTTING DISCS STAINLESS STEEL															
AS 60 W EVOLUTION EXPRESS 0,8	22	●	●	●	●	●●	●●		●	●	●	●			
A 60 R PERFECT EXPRESS 1,0	23	●●	●	●	●	●	●		●	●	●	●	●		
AS 60 T INOX SPECIAL 1,0	23	●	●	●	●●	●●	●●		●	●●	●●	●●			
AS 60 V EVOLUTION EXPRESS 1,0	25	●●	●●	●●	●●	●●	●●		●	●	●	●			
AS 60 W HT EVOLUTION JUBILEE 1,0	26	●●	●●	●●	●●	●●	●●		●	●	●	●			
A 46 R PERFECT EXPRESS 1,6	26	●●	●	●	●	●	●		●	●	●	●			
AS 46 T INOX SPECIAL 1,6	27	●	●	●	●●	●●	●●		●	●	●	●			
AS 46 V EVOLUTION EXPRESS 1,6	28	●●	●●	●●	●●	●●	●●		●	●	●	●			
AK 60 V EVOLUTION CERAMAXX	30	●●	●●	●●	●●	●●	●●		●●	●	●	●			
AK 46 V EVOLUTION CERAMAXX	30	●●	●●	●●	●●	●●	●●		●●	●	●	●			
ACS 46 / ACS 60 T MULTI	31	●	●	●	●	●●	●●		●●	●●	●●	●●	●●	●	
AS 46 / AS 60 T INOX FREECUT	32	●	●	●	●	●●	●●		●	●	●	●			
AS 46 / AS 30 T INOX CUT+GRIND	33	●	●	●	●●	●	●●		●●	●	●	●			
AS 30 S INOX SPECIAL, 2,5	34	●	●	●	●●	●	●●		●●	●	●	●			
AS 30 T INOX SPECIAL, 2,2	34	●	●	●	●●	●	●●		●●	●	●	●			
◆ FREE HAND CUTTING DISCS STEEL															
A 24 R PERFECT, 3,0	35	●●	●	●	●	●	●		●	●	●	●			
AS 30 S SPECIAL, 3,0	36	●●	●●	●●	●●	●	●		●●	●●	●●	●●			
AS 30 T SPECIAL, 2,0	37	●●	●●	●●	●●	●	●●		●	●	●	●			
AS 30 S HT EVOLUTION, 3,0	37	●●	●●	●●	●●	●	●		●	●	●●	●●			
AS 30 V EVOLUTION, 3,0	38	●●	●●	●●	●●	●	●●		●	●	●	●			
AS 36 V EVOLUTION, 2,2	38	●●	●●	●●	●●	●	●●		●	●	●	●			
◆ FREE HAND CUTTING DISCS ALUMINIUM															
CS 60 ALU SPECIAL, 1,2	39								●●	●●	●●				
CS 46 ALU SPECIAL, 1,6	39								●●	●●	●●				
◆ FREE HAND CUTTING DISCS RAIL SECTIONS															
AS 24 R BAHN SPECIAL	40	●	●	●	●	●	●	●●	●●	●	●	●			
◆ MINI CUTTING DISCS															
AS 46 T MINI SPECIAL	41	●	●	●	●	●	●	●	●	●	●	●			
◆ CUTTING DISCS FOR STATIONARY MACHINES / CHOP-SAWS															
A 30 S PERFECT	42	●	●	●	●	●	●	●	●	●	●	●			
AS 30 S SPECIAL	42	●●	●●	●●	●●	●	●	●	●●	●●	●●	●●			
AS 36 T SPECIAL / CHOP SAW	43	●●	●●	●	●	●	●	●	●	●	●	●			
AS 36 S INOX SPECIAL / CHOP SAW	43	●	●●	●●	●●	●	●●		●●	●●	●●	●●			



Professional application

Top product: extremely fast cutting,
outstanding service life, minimum effort



Demanding application

Very good cutting performance, high service life



Standard application

Good cutting performance, good service life

You can get Dronco metal cutting discs in different performance classes - from a standard product for occasional use up to the high-end product for professional applications.

▷ Free hand cutting discs stainless steel/steel 0,8 mm

AS 60 W 0,8 mm	evolution	Free hand	★★★★			
	<p>The extra fine cutting disc Evolution AS 60 W with a thickness of 0.8 mm is the right choice for cutting thin-walled profiles and pipes, thin sheet and ropes. The extra smooth cutting disc is characterised by its fast and smooth cutting with low contact pressure.</p> <p>Extra fine Extremely fast</p> <p>It's not only the outstanding cutting speed that is extra fine, but also the low-burr cut with limited sparking as well as the excellent service life thanks to the Lifetime Plus seal.</p>	<p>For thin sheets, steel ropes, thin-walled profiles and pipes made of stainless steel and non-ferrous metals, as well as composite materials (glass-reinforced plastics)</p>				
	<p>The AS 60 W is supplied extra fine and extra fresh in Lifetime Plus Tins containing 25 or 10 pieces.</p>	<p>Lifetime-Plus</p> <ul style="list-style-type: none"> • over 30% * more service life (number of cuts) • stops the natural ageing process of synthetic resin-bonded discs • keeps cutting discs fresh until the pack is opened for the first time 				
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 0,8 x 22,23	4 1/2 x 0,030 x 7/8	13280	1 TIN à 25	—	6900842100	701630
125 x 0,8 x 22,23	5 x 0,030 x 7/8	12200	1 TIN à 25	—	6900843100	701647
115 x 0,8 x 22,23	4 1/2 x 0,030 x 7/8	13280	1 TIN à 10	—	6900840100	701616
125 x 0,8 x 22,23	5 x 0,030 x 7/8	12200	1 TIN à 10	—	6900841100	701623
Also available 25 pcs. in shrinked plastic foil						
115 x 0,8 x 22,23	4 1/2 x 0,030 x 7/8	13280	25	—	1111000100	110302
125 x 0,8 x 22,23	5 x 0,030 x 7/8	12200	25	—	1121000100	120301


* compared to a standard 1mm cutting disc, stored for 6 weeks and subject to a natural ageing process which results in reduction of service life.

METAL CUTTING DISCS



Free hand cutting discs stainless steel/steel 1,0 mm

A 60 R 1 mm	perfect	Free hand	★★★☆☆
	The economic alternative for thin steel cutting discs. Good cutting ability with a good lifetime, manufactured in 1 mm.		Thin-walled profiles and sheet metals in structural and container work. Is often used in car-body building. Suitable for stainless steel as well.
DIMENSION			
MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	25
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	25
115 x 1 x 22,23	4 1/2 x 1/25 x 7/8	13280	1 Tin à 10
125 x 1 x 22,23	5 x 1/25 x 7/8	13280	1 Tin à 10
			ITEM CODE BAR CODE 4081600
			1110240100 110012
			1120240100 120011
			6900987100 701319
			6900988100 701326

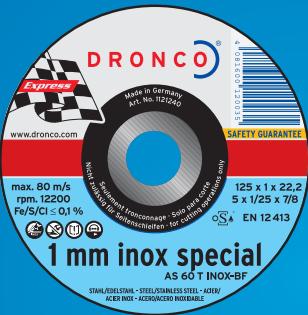AS 60 T INOX 1 mm	special	Free hand	★★★☆☆
	This very thin disc (1.0 mm) enables you to achieve a uniquely clean cut in the shortest possible time while using a minimum of force. Precise to the millimetre, vibration-free cutting, no thermal bluing and no burring (precluding the need for subsequent machining).		Thin sheet metal (of the type used in car bodies, tank farms and the tank construction sector), steel cable, thin-walled profile sections and pipes made of stainless steel and non-ferrous metals. Composite materials (FRP). High-temperature materials, e.g. repairing turbines.
DIMENSION			
MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
100 x 1,0 x 16,0	4 x 1/25 x 5/8	15250	25
105 x 1,0 x 16,0	4 x 1/25 x 5/8	14560	25
115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	25
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	25
POWER PACK TIN	10 cutting discs in the attractive and popular metal box. A big seller for guaranteed increased turnover.		Each box includes 10 metal cutting discs AS 60 INOX 1mm.
			
115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	1 Tin à 10
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	1 Tin à 10
			ITEM CODE BAR CODE 4081600
			1101240100 101072
			1101241100 101157
			1111240100 111026
			1121240100 121025
			6900935 701050
			6900945 701067

AS 60 T INOX 1 mm	special	Free hand	★★★☆
LIFETIME-PLUS TIN			
	<p>Over 30% more service-life*: With the new Lifetime-Plus concept, we have given the Power Pack tin an amazing new function. Lifetime-Plus seals in the full performance of the discs and keeps it there until the pack is opened for the first time. So these "fresh from the oven" discs ensure to put all their power onto the machine.</p>		

* compared to a standard 1mm cutting disc, stored for 6 weeks and subject to a natural ageing process which results in reduction of service life.

Lifetime-Plus

- ▷ over 30%* more service life (number of cuts)
- ▷ stops the natural ageing process of synthetic resin-bonded discs
- ▷ keeps cutting discs fresh until the pack is opened for the first time



Lifetime-Plus

- over 30% * more service life (number of cuts)
- stops the natural ageing process of synthetic resin-bonded discs
- keeps cutting discs fresh until the pack is opened for the first time



Why Lifetime-Plus?

A standard 1mm cutting disc undergoes a natural ageing process during storage due to the absorption of moisture from the air. After just 6 weeks, the tool life can have fallen by an average of approx. 30%.

The ingenious Lifetime-Plus freshness seal stops this process before it even starts. Prepare to be amazed at the outstanding life of cutting discs from a freshly opened Lifetime-Plus pack.

METAL CUTTING DISCS



AS 60 V 1 mm

evolution express

Free hand



Clearly faster - clearly more precise - clearly better:
Top class 1mm cutting disc in best quality.
For precision cutting accurate to the millimetre and
extremely fast cutting with minimum power consumption.
No burring, no blue thermal discolouration. Outstanding
optimized service life. True performance for your money.

- ▶ outstanding service life
- ▶ outstanding cutting speed
- ▶ lowest power consumption
- ▶ precision cutting accurate to the millimetre
- ▶ low-burr or burr-free edges

Top of the class in speed and tool life

With our extra-thin, high-speed discs you will cross the finishing line in record time. Yet at the same time you can work in extreme comfort, with absolute safety and the highest level of precision – because you are using the best discs from the DRONCO racing stable.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE
100 x 1,0 x 16,0	4 x 1/25 x 5/8	15250	25	—	1101246100	101126
105 x 1,0 x 16,0	4 x 1/25 x 5/8	14560	25	—	1101247100	101133
115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	25	—	1111246100	111125
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	25	—	1121246100	121179

POWER-PACK TIN



10 cutting discs in the attractive and popular metal box.
A big seller for guaranteed increased turnover.

Each box includes 10 metal cutting discs AS 60 V 1mm.

115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	1 TIN à 10	—	6900975	704877
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	1 TIN à 10	—	6900985	704884

LIFETIME-PLUS TIN



Over 30% more service life*:

With the new Lifetime-Plus concept, we have given the Power Pack tin an amazing new function. Lifetime-Plus seals in the full performance of the discs and keeps it there until the pack is opened for the first time. So these "fresh from the oven" discs ensure to put all their power onto the machine.

Lifetime-Plus

- over 30% * more service life (number of cuts)
- stops the natural ageing process of synthetic resin-bonded discs
- keeps cutting discs fresh until the pack is opened for the first time

115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	1 TIN à 10	—	6900851100	701210
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	1 TIN à 10	—	6900853100	701234
115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	1 TIN à 25	—	6900872100	701425
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	1 TIN à 25	—	6900873100	701432

* compared to a standard 1mm cutting disc, stored for 6 weeks and subject to a natural ageing process which results in reduction of tool life.

AS 60 W HT Jubilee
evolution
Free hand


The bond of this high performance cutting disc was developed in the laboratory of DRONCO with the aim of an especially cool cut and was completed just in time for our 50th anniversary. In combination with a ceramic coated grain of the latest generation, a new high end tool was born: The 1 mm cutting disc Evolution AS 60 W HT Jubilee.

State of the art. The benefits of this top product:

- outstanding lifetime
- excellent cutting speed
- cool cuts
- low burr edges



Internal tests showed a lifetime extension of 17% in comparison to even our Evolution AS 60 V. Especially produced to ensure the greatest number of fast and precise cuts with minimum power consumption.


Lifetime-Plus

- over 30% * more service-life (number of cuts)
- stops the natural ageing process of synthetic resin-bonded discs
- keeps cutting discs fresh until the pack is opened for the first time

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE
115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	1 TIN à 10	—	6900864100	701869
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	1 TIN à 10	—	6900865100	701876
115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	1 TIN à 25	—	6900845100	701678
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	1 TIN à 25	—	6900846100	701685
Also available 25 pcs. in shrinked plastic foil						
115 x 1,0 x 22,23	4 1/2 x 1/25 x 7/8	13280	25	—	111247100	111644
125 x 1,0 x 22,23	5 x 1/25 x 7/8	12200	25	—	1121247100	121780

* compared to a standard 1mm cutting disc, stored for 6 weeks and subject to a natural ageing process which results in reduction of tool life.

▼ Free hand cutting discs stainless steel/steel 1,6 mm
A 46 R
perfect express
Free hand


The good value solution for thin 1,6 mm metal cutting discs. Good cutting ability at normal lifetime. Almost no burring. Good compromise between the normal 3 mm and the 1,2 mm discs.

Suitable for sheet metal and profiles made from mild steel and stainless steel.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE
115 x 1,6 x 22,23	4 1/2 x 1/16 x 7/8	13280	25	—	1110250100	110036
125 x 1,6 x 22,23	5 x 1/16 x 7/8	12200	25	—	1120250100	120035

METAL CUTTING DISCS



AS 46 T INOX

special

Free hand



Free of iron and sulphur. Requiring little effort, the special thin cutting disc is easy on man and machine. High cutting speed, long service life, hardly any burring.

Normal steel and stainless steel, particularly suitable for sheet metal and thin-walled profiles. The standard disc used on tank farms and in tank construction.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 1,6 x 22,23	4 1/2 x 1/16 x 7/8	13280	25	—	1111250100	111118
125 x 1,6 x 22,23	5 x 1/16 x 7/8	12200	25	—	1121250100	121117
150 x 1,6 x 22,23	6 x 1/16 x 7/8	10200	25	—	1153250100	133103
180 x 1,6 x 22,23	7 x 1/16 x 7/8	8600	25	—	1183250100	143119
230 x 1,9 x 22,23	9 x 5/64 x 7/8	6600	25	—	1233250100	153118

LIFETIME-PLUS TIN



Over 30% more service life*:


With the new Lifetime-Plus concept, we have given the Power Pack tin an amazing new function. Lifetime-Plus seals in the full performance of the discs and keeps it there until the pack is opened for the first time. So these "fresh from the oven" discs ensure to put all their power onto the machine.

Lifetime-Plus

- over 30% * more service life (number of cuts)
- stops the natural ageing process of synthetic resin-bonded discs
- keeps cutting discs fresh until the pack is opened for the first time

115 x 1,6 x 22,23	4 1/2 x 1/16 x 7/8	13280	1 TIN à 25	—	6900874100	701449
125 x 1,6 x 22,23	5 x 1/16 x 7/8	12200	1 TIN à 10	—	6900856100	701265
125 x 1,6 x 22,23	5 x 1/16 x 7/8	12200	1 TIN à 25	—	6900875100	701456
230 x 1,9 x 22,23	9 x 5/64 x 7/8	6600	1 TIN à 10	—	6900855100	701258

* compared to a standard 1mm cutting disc, stored for 6 weeks and subject to a natural ageing process which results in reduction of service life.

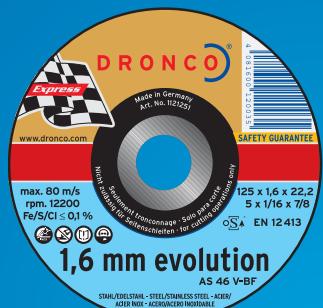AS 46 V
evolution express
Free hand


This top disc stands out for high cutting speed in connection with a very high lifetime. Cutting with little or no burrs.

For normal and stainless steel, especially for sheet metal and thin-walled profiles.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 1,6 x 22,23	4 1/2 x 1/16 x 7/8	13280	25	—	1111251100	111132
125 x 1,6 x 22,23	5 x 1/16 x 7/8	12200	25	—	1121251100	121148
180 x 1,6 x 22,23	7 x 1/16 x 7/8	8600	25	—	1183251100	143171
230 x 1,9 x 22,23	9 x 5/64 x 7/8	6600	25	—	1233251100	153170

LIFETIME-PLUS TIN

>30%
LIFETIME-PLUS


Over 30% more service life*:

With the new Lifetime-Plus concept, we have given the Power Pack tin an amazing new function. Lifetime-Plus seals in the full performance of the discs and keeps it there until the pack is opened for the first time. So these "fresh from the oven" discs ensure to put all their power onto the machine.

Lifetime-Plus

- over 30% * more service life (number of cuts)
- stops the natural ageing process of synthetic resin-bonded discs
- keeps cutting discs fresh until the pack is opened for the first time


DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 1,6 x 22,23	4 1/2 x 1/16 x 7/8	13280	1 TIN à 25	—	6900876100	701463
125 x 1,6 x 22,23	5 x 1/16 x 7/8	12200	1 TIN à 25	—	6900877100	701470
180 x 1,6 x 22,23	7 x 1/16 x 7/8	8600	1 Tin à 10	—	6900860100	701289
230 x 1,9 x 22,23	9 x 5/64 x 7/8	6600	1 Tin à 10	—	6900861100	701296



CERAMAXX

OUR STRONGEST DISCS!

WITH CERAMIC GRAIN OF THE LATEST GENERATION
GIVING AN ULTIMATELY INCREASED PERFORMANCE

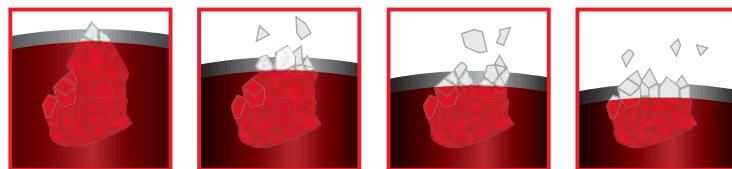

UNRIVALLED SPEED + UNBEATEN AGGRESSION
+ ULTRA LONG LIFETIME + MINIMAL ENERGY INPUT
= HIGHEST EFFICIENCY

The new bonding technology and the micro-crystalline structure of the ceramic grain ensure a targeted release of new extremely sharp cutting edges. This guarantees the permanent availability of maximum performance of the CeraMaxx cutting and grinding discs - from start to finish. For a maximized cutting speed, removal rate and lifetime.

The sharpest - the best!

DRONCO CeraMaxx discs are among the fastest, most aggressive and most durable on the market, optimizing the work process, saving down time and labour costs giving greatly increased productivity and efficiency.

CeraMaxx cutting discs with ceramic grain of the latest generation

- Excellent cutting speed = high productivity
- Lowest energy input = sparing man and machine
- Clean, burr-free cut = less rework
- Cool cutting without thermal blueing = less rework
- Excellent lifetime = reduced disc consumption



AK 60 V CERAMAXX
evolution
★★★★


The thin CeraMaxx cutting discs cut ultra fast with little effort massively reducing the energy input. The full cutting performance is therefore achieved at low pressure. For precision cutting accurate to the millimetre and with burr-free edges. Ideal for users from pipeline engineering and construction, shipyards, metal engineering, foundries, commercial vehicle construction, steel construction, plant engineering, crane construction, construction machine production.

The advantages of the CeraMaxx cutting discs prove especially effective in strong profiles and full material. For steel and stainless steel. Fe/S/Cl ≤ 0,1 %

**ceramic
INSIDE 2.0**

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 1,2 x 22,23	4 1/2 x 3/64 x 7/8	13280	25	—	1111500100	111989
125 x 1,2 x 22,23	5 x 3/64 x 7/8	12200	25	—	1121500100	122299
LIFETIME-PLUS TIN						
115 x 1,2 x 22,23	4 1/2 x 3/64 x 7/8	13280	1 TIN à 10	—	6900820100	702309
125 x 1,2 x 22,23	5 x 3/64 x 7/8	12200	1 TIN à 10	—	6900821100	702316

AK 46 V CERAMAXX
evolution
★★★★


The CeraMaxx cutting discs cut ultra fast with little effort massively reducing the energy input. The full cutting performance is therefore achieved at low pressure. Ideal for users from pipeline engineering and construction, shipyards, metal engineering, foundries, commercial vehicle construction, steel construction, plant engineering, crane construction, construction machine production.

The advantages of the CeraMaxx cutting discs prove especially effective in strong profiles and full material. For steel and stainless steel. Fe/S/Cl ≤ 0,1 %

**ceramic
INSIDE 2.0**

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 1,6 x 22,23	4 1/2 x 1/16 x 7/8	13280	25	—	1111512100	111828
125 x 1,6 x 22,23	5 x 1/16 x 7/8	12200	25	—	1121512100	122312
150 x 1,6 x 22,23	6 x 1/16 x 7/8	10200	25	—	1153511100	133073
LIFETIME-PLUS TIN						
115 x 1,6 x 22,23	4 1/2 x 1/16 x 7/8	13280	1 TIN à 10	—	6900822100	702323
125 x 1,6 x 22,23	5 x 1/16 x 7/8	12200	1 TIN à 10	—	6900823100	702330

METAL CUTTING DISCS



ACS 46 / ACS 60 T MULTI

special

Free hand

★★★☆



The special recipe of this new combi-disc ACS60T-MULTI allows cutting of metal and wall tiles without changing the disc. A special tool for special users, such as plumbers.

For use on stainless steel, mild steel and stone (especially wall tiles).



Three discs in one

- Combi-disc for stainless steel, steel and wall tiles
- good cutting performance
- comfortable cutting
- no time-consuming disc changes required
- low-burr to burr-free edges

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 1,2 x 22,23	4 1/2 x 3/64 x 7/8	13280	25	—	1111360100	111804
125 x 1,2 x 22,23	5 x 3/64 x 7/8	12200	25	—	1121360100	121803
180 x 1,6 x 22,23	7x1/16x7/8	8600	25	—	1183360100	143157
230 x 1,9 x 22,23	9x 5/64x7/8	6600	25	—	1233360100	153606

POWER-PACK-TIN



10 cutting discs in the attractive and popular metal box.
A big seller for guaranteed increased turnover.

Each box includes 10 combi-discs
ACS 60 T Multi 1,2 mm.

115 x 1,2 x 22,23	4 1/2 x 3/64 x 7/8	13280	1 TIN à 10	—	6900942100	704808
125 x 1,2 x 22,23	5 x 3/64 x 7/8	12200	1 TIN à 10	—	6900943100	704815

PLEASE NOTE

This product is also suitable for battery-powered angle grinders in diameters 115 and 125 mm.



▷ Free hand cutting discs stainless steel/steel

AS 46 / AS 60 T INOX FreeCut	special	Free hand	★★★☆
		<p>FreeCut: The Conical Disc. This disc developed by DRONCO (patent pending) is a revolution in its field. The conical form of the disc tapers from the outer edge to the inner edge and gives the disc ideal cutting qualities. No braking effect caused by side friction, no jamming of the disc in the work piece (thus avoiding the dangerous kick-back effect). The cutting only takes place on the face side. The disc is easy to work with: pleasant, quick and safe cutting, good cutting control, no jamming.</p> <p>Greater safety and precision during use.</p> <ul style="list-style-type: none"> • does not jam during cutting • reduces the dangerous „kick-back“ effect • less heat generated • reduced side friction for unhindered cutting • light, power-saving handling using the FreeCut principle • less reduction of r.p.m. in the machine – and therefore faster cutting 	<p>For cutting steel and stainless steel, also suitable for non-ferrous metals. Does not contain iron, sulphur or chlorine (each 0.1%). Suitable for thin- and thick-walled profiles and solid material.</p>  <p>The cutting disc tapers towards the center</p>
<hr/>			
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115x2,0/1,0x22,23	4 1/2x5/64-1/25x7/8	13280	25
125x2,0/1,0x22,23	5x5/64 - 1/25x7/8	12200	25
AS 46 T INOX FreeCut			
150x2,5/2,0x22,23	6x3/32 - 5/64x7/8	10200	25
180x3,0/2,0x22,23	7x5/64 - 1/8x7/8	8600	25
230x3,0/2,0x22,23	9x5/64 - 1/8x7/8	6600	25
POWER-PACK-TIN AS 60 T INOX FREECUT			
 <p>10 cutting discs in the attractive and popular metal box. A big seller for guaranteed increased turnover.</p>			
<p>Each box includes 10 metal cutting discs AS 60 T INOX FreeCut.</p>			
115x2,0/1,0x22,23	4 1/2x5/64-1/25x7/8	13280	1 TIN à 10
125x2,0/1,0x22,23	5x5/64 - 1/25x7/8	12200	1 TIN à 10

PLEASE NOTE

This product is also suitable for battery-powered angle grinders in diameters 115 and 125 mm.



METAL CUTTING DISCS



AS 46 / AS 30 T INOX CUT+GRIND special

Free hand

★★★☆




Cut+Grind: The first cutting disc you are also allowed to use for grinding. The Cut+Grind cuts at a comfortable speed with a thickness of 2.5 mm or 3.5 mm, you can immediately deburr and grind without changing the disc. That saves setup time and therefore money! Good removal rate for light grinding tasks. Of course, the disc complies with the prescribed lateral load for grinding discs of 290 N.

Suitable for normal and stainless steel, both for solid material as well as for profiles. Cutting and grinding in one step.



Deburr or grind immediately without changing the disc.

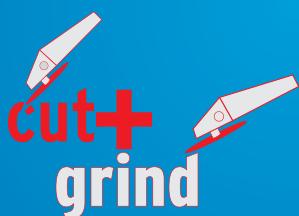

The first thin cutting disc you are also allowed to use for side grinding

- cutting and light grinding work in one step
- good cutting speed
- good removal rate
- no time-consuming disc changes required
- no need to purchase different discs
- for steel or stainless steel

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE
115 x 2,5 x 22,23	4 1/2 x 3/32 x 7/8	13280	25	—	1113270100	113600
125 x 2,5 x 22,23	5 x 3/32 x 7/8	12200	25	—	1123270100	123609
AS 30 T INOX CUT + GRIND						
180 x 3,5 x 22,23	7 x 1/8 x 7/8	8600	25	—	1183270100	143607

POWER-PACK-TIN AS 46 T INOX CUT + GRIND



5 combined cutting and grinding discs in the attractive and popular metal box. A big seller for guaranteed increased turnover.

Each tin-box includes 5 combined discs AS 46 T INOX CUT+GRIND

115 x 2,5 x 22,23	4 1/2 x 3/32 x 7/8	13280	1 TIN à 5	—	6900936100	704983
125 x 2,5 x 22,23	5 x 3/32 x 7/8	12200	1 TIN à 5	—	6900946100	704969

PLEASE NOTE

This product is also suitable for battery-powered angle grinders in diameters 115 and 125 mm.



▷ Free hand cutting discs stainless steel/steel from 2 mm

AS 30 S INOX	special	Free hand	★★★☆
			Containing no iron, sulphur or chlorine, the recipe of the disc prevents the formation of rust.
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115 x 2,5 x 22,23	4 1/2 x 3/32 x 7/8	13280	25
115 x 2,5 x 22,23	4 1/2 x 3/32 x 7/8	13280	25
125 x 2,5 x 22,23	5 x 3/32 x 7/8	12200	25
125 x 2,5 x 22,23	5 x 3/32 x 7/8	12200	25
180 x 2,5 x 22,23	7 x 3/32 x 7/8	8600	25
180 x 2,5 x 22,23	7 x 3/32 x 7/8	8600	25
230 x 2,5 x 22,23	9 x 3/32 x 7/8	6600	25
230 x 2,5 x 22,23	9 x 3/32 x 7/8	6600	25

AS 30 T INOX	special	Free hand	★★★☆
			Containing no iron, sulphur or chlorine, the recipe of the disc prevents the formation of rust.
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115 x 2,2 x 22,23	4 1/2 x 3/32 x 7/8	13280	25
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	25
180 x 2,2 x 22,23	7 x 3/32 x 7/8	8600	25
230 x 2,2 x 22,23	9 x 3/32 x 7/8	6600	25

Special disc designed to cut stainless steel, service life also good in normal steel.

METAL CUTTING DISCS



Free hand cutting discs steel

A 24 R	perfect	Free hand	★★★★★			
	Good service life and fast cutting at a reasonable price.	All-purpose disc, suitable for cutting all types of metal.				
Good service life and fast cutting at a reasonable price.						
All-purpose disc, suitable for cutting all types of metal.						
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
100 x 3,0 x 16	4 x 1/8 x 5/8	15250	25	—	1100015100	100006
100 x 3,0 x 16	4 x 1/8 x 5/8	15250	25	—	1102015100	102000
115 x 3,0 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1110015100	110005
115 x 3,0 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1112015100	112009
125 x 3,0 x 22,23	5 x 1/8 x 7/8	12200	25	—	1120015100	120004
125 x 3,0 x 22,23	5 x 1/8 x 7/8	12200	25	—	1122015100	122008
150 x 3,0 x 22,23	6 x 1/8 x 7/8	10200	25	—	1150015100	130003
150 x 3,0 x 22,23	6 x 1/8 x 7/8	10200	25	—	1152015100	132007
180 x 3,0 x 22,23	7 x 1/8 x 7/8	8600	25	—	1180015100	140002
180 x 3,0 x 22,23	7 x 1/8 x 7/8	8600	25	—	1182015100	142006
230 x 3,0 x 22,23	9 x 1/8 x 7/8	6600	25	—	1230015100	150001
230 x 3,0 x 22,23	9 x 1/8 x 7/8	6600	25	—	1232015100	152005
300 x 3,5 x 20,0	12 x 1/8 x 3/4	5100	25	—	1300225100	160093
300 x 3,5 x 22,23	12 x 1/8 x 7/8	5100	25	—	1300226100	160116

AS 30 S
special
Free hand
★★★☆


Long service life and good cutting capacity for cost-effective operations.

Professional applications, cutting metal, construction steel or cast.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
100 x 3,0 x 16	4 x 1/8 x 5/8	15250	25	—	1103115100	103007
115 x 3,0 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1111115100	111002
115 x 3,0 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1113115100	113006
125 x 3,0 x 22,23	5 x 1/8 x 7/8	12200	25	—	1121115100	121001
125 x 3,0 x 22,23	5 x 1/8 x 7/8	12200	25	—	1123115100	123005
150 x 3,0 x 22,23	6 x 1/8 x 7/8	10200	25	—	1153115100	133004
180 x 3,0 x 22,23	7 x 1/8 x 7/8	8600	25	—	1181115100	141009
180 x 3,0 x 22,23	7 x 1/8 x 7/8	8600	25	—	1183115100	143003
230 x 3,0 x 22,23	9 x 1/8 x 7/8	6600	25	—	1231115100	151008
230 x 3,0 x 22,23	9 x 1/8 x 7/8	6600	25	—	1233115100	153002
300 x 3,5 x 20	12 x 1/8 x 3/4	5100	25	—	1301125100	161007
300 x 3,5 x 22,23	12 x 1/8 x 7/8	5100	25	—	1301126100	161014
300 x 3,5 x 25,4	12 x 1/8 x 1	6400	25	—	1301127100	161021
350 x 4,0 x 20	14 x 5/32 x 3/4	5500	10	—	1351135100	171006
350 x 4 x 25,4	14 x 5/32 x 1	5500	10	—	1351137100	171020

METAL CUTTING DISCS



AS 30 T

special

Free hand



The clean cut of this special thin cutting disc enables you to cut sheet metal without contorting the material or producing any burrs.

Sheet steel, particularly of the type used on tank farms and in tank construction.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 2,0 x 22,23	4 1/2 x 5/64 x 7/8	13280	25	—	1111055100	111040
115 x 2,0 x 22,23	4 1/2 x 5/64 x 7/8	13280	25	—	1113055100	113044
115 x 2,5 x 22,23	4 1/2 x 3/32 x 7/8	13280	25	—	1113060100	113037
125 x 2,0 x 22,23	5 x 5/64 x 7/8	12200	25	—	1121055100	121049
125 x 2,0 x 22,23	5 x 5/64 x 7/8	12200	25	—	1123055100	123043
125 x 2,5 x 22,23	5 x 3/32 x 7/8	12200	25	—	1123060100	123050
180 x 2,0 x 22,23	7 x 5/64 x 7/8	8600	25	—	1181055100	141047
180 x 2,5 x 22,23	7 x 3/32 x 7/8	8600	25	—	1183060100	143027
230 x 2,0 x 22,23	9 x 5/64 x 7/8	6600	25	—	1231055100	151046
230 x 2,5 x 22,23	9 x 3/32 x 7/8	6600	25	—	1233060100	153040

AS 30 S HT

evolution

Free hand



With high-temperature treated corundum and balanced bonding, the evolution AS 30 S HT combines the metal removing capacity and cutting performance of a soft disc with the long service life of a hard disc.

Steel, cast, non-ferrous metals.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 3 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1111940100	111019
115 x 3,0 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1113940100	113013
125 x 3,0 x 22,23	5 x 1/8 x 7/8	12200	25	—	1121940100	121018
125 x 3,0 x 22,23	5 x 1/8 x 7/8	12200	25	—	1123940100	123012
180 x 3,0 x 22,23	7 x 1/8 x 7/8	8600	25	—	1181940100	141016
180 x 3,0 x 22,23	7 x 1/8 x 7/8	8600	25	—	1183940100	143010
230 x 3,0 x 22,23	9 x 1/8 x 7/8	6600	25	—	1231940100	151015
230 x 3,0 x 22,23	9 x 1/8 x 7/8	6600	25	—	1233940100	153026

AS 30 V
evolution
Free hand



This is a very hard disc that is characterised by its pronounced all-round qualities and fast cutting capacity. It is particularly suitable for cutting pipes and thin-walled profile sections.

Construction steel, thin-walled profile sections, pipes, etc.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
100 x 3,0 x 16	4 x 1/8 x 5/8	15250	25	—	1101966100	101201
115 x 3,0 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1111966100	111200
115 x 3,0 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1113966100	113204
125 x 3,0 x 22,23	5 x 1/8 x 7/8	12200	25	—	1121966100	121209
125 x 3,0 x 22,23	5 x 1/8 x 7/8	12200	25	—	1123966100	123203
180 x 3,0 x 22,23	7 x 1/8 x 7/8	8600	25	—	1181966100	141214
230 x 3,0 x 22,23	9 x 1/8 x 7/8	6600	25	—	1231965100	151206
230 x 3,0 x 22,23	9 x 1/8 x 7/8	6600	25	—	1233965100	153200

AS 36 V
evolution
Free hand



Extremely resistant when cutting materials with sharp edges and thin-walled profiles. Thinner than the AS 30 V and therefore capable of cutting even faster and more precisely.

Construction steel, thin-walled profile sections, pipes, etc.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
100 x 2,2 x 16	4 x 3/32 x 5/8	15250	25	—	1101070100	101256
115 x 2,2 x 22,23	4 1/2 x 3/32 x 7/8	13280	25	—	1111070100	111255
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	25	—	1121070100	121254
150 x 2,2 x 22,23	6 x 3/32 x 7/8	10200	25	—	1151070100	131253
180 x 2,2 x 22,23	7 x 3/32 x 7/8	8600	25	—	1181070100	141252
230 x 2,2 x 22,23	9 x 3/32 x 7/8	6600	25	—	1231070100	151251



▼ Free hand cutting discs aluminium

CS 60 ALU	special	Free hand	★★★☆
	<p>The outstanding characteristics of the thin cutting discs are now available for aluminium and non-ferrous metals as well. The recipe of the disc guarantees fast cutting without clogging. Long service life.</p>		
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115 x 1,2 x 22,23	4 1/2 x 3/64 x 7/8	13280	25
125 x 1,2 x 22,23	5 x 3/64 x 7/8	12200	25

PLEASE NOTE

This product is also suitable for battery-powered angle grinders in diameters 115 and 125 mm.



CS 46 ALU	special	Free hand	★★★☆
	<p>Thin, easy cutting disc for clean cuts. Specially designed to cut aluminium and other non-ferrous metals. No clogging, long service life.</p>		
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
150 x 1,6 x 22,23	6 x 1/16 x 7/8	10200	25
180 x 1,6 x 22,23	7 x 1/16 x 7/8	8600	25
230 x 1,9 x 22,23	9 x 5/64 x 7/8	6600	25

▷ Free hand cutting discs for rail sections

AS 24 R BAHN	special	Free hand	★★★☆			
		Special disc designed to cut all rail sections in short time.				
			Cutting new and compressed rail sections (e.g. UIC 60, S54 or S49).			
						
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
300 x 3,5 x 22,23	12 x 1/8 x 7/8	5100	25	—	1301376100	161113
300 x 3,5 x 25,4	12 x 1/8 x 1	5100	25	—	1301377100	161120
350 x 4,0 x 22,23	14 x 5/32 x 7/8	5500	10	—	1351386100	171112
350 x 4,0 x 25,4	14 x 5/32 x 1	5500	10	—	1351387100	171129

METAL CUTTING DISCS



▼ Mini cutting discs

AS 46 T Mini cutting discs	special	Free hand	★★★☆
	The small cutting disc for pneumatic grinders. This disc offers a means of reaching areas that are difficult to get at. Please choose the right bore.	Perfectly suitable for thin sheet steel. Good performance on construction steel, tool steel and high-speed steel.	
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
50 x 1,0 x 6	2 x 1/25 x 1/4	30600	25
50 x 2,0 x 6	2 x 5/64 x 1/4	30600	25
60 x 2,0 x 6	2 3/8 x 5/64 x 1/4	25450	25
76 x 1 x 6	3 x 1/25 x 1/4	20100	25
76 x 1,2 x 10	3 x 1/25 x 3/8	20100	25
76 x 1,6 x 10	3 x 1/16 x 3/8	20100	25

Mini grinding discs can be found on page 61

Tensioning shaft for mini cutting discs



The tensioning shaft enables the use of mini cutting discs on straight or cylindrical grinders and drill machines.

DIMENSION MM	DIMENSION INCH	DIMENSION PC.	CONTENT PC.	ARTIKEL NUMMER	BAR CODE
Tensioning shaft 6 mm x M6	6 mm	1/4	1	6400001100	642575
Tensioning shaft 6 mm x M10	6 mm	1/4	1	6400002100	642582

▼ Discs for stationary cutting machines | Chop-Saws

A 30 S	perfect	Stationary	★★★☆
	Soft, all-purpose standard disc for stationary cutting machines.		Particularly suitable for construction steel and tool steel. Good performance on cast.
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
300 x 3,5 x 25,4	12 x 1/8 x 1	5100	25
300 x 3,5 x 32	12 x 1/8 x 11/4	5100	25
350 x 3,5 x 25,4	14 x 1/8 x 1	4400	10
350 x 3,5 x 32	14 x 1/8 x 11/4	4400	10

AS 30 S	special	Stationary	★★★☆
	Long service life, even when used to cut different materials and cutting stability allow working cost-effectively, whether you are cutting profiles, pipes or solid metal.		Metal, construction steel and castings.
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
300 x 3,5 x 25,4	12 x 1/8 x 1	6400	25
300 x 3,5 x 32	12 x 1/8 x 11/4	6400	25
350 x 3,5 x 25,4	14 x 1/8 x 1	5500	10
350 x 3,5 x 32	14 x 1/8 x 11/4	5500	10
400 x 4,0 x 25,4	16 x 5/32 x 1	4780	10
400 x 4,0 x 40	16 x 5/32 x 19/16	4780	10

METAL CUTTING DISCS



AS 36 T

special

Chop-Saw

★★★☆



High-quality special disc for "chop saws".
(stationary cutting machines with a driving power up to 2.4 kW/3 HP).

Construction steel, tool steel, sheet steel and cast.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
300 x 2,8 x 25,4	12 x 7/64 x 1	5100	25	—	2300220100	261103
350 x 3,0 x 25,4	14 x 1/8 x 1	4400	10	—	2350220100	271102
400 x 3,2 x 25,4	16 x 1/8 x 1	4780	10	—	2400220100	281101

AS 36 S INOX

special

Chop-Saw

★★★☆



High-quality special disc for Chop-Saws. Due to the recipe without using iron, sulphur and chlorine, formation of rust at the edges is prevented.

Special disc for cutting stainless steel, very good lifetime also in mild steel.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
300 x 2,8 x 25,4	12 x 7/64 x 1	5100	25	—	2300920100	260151
350 x 3,0 x 25,4	14 x 1/8 x 1	4400	10	—	2350920100	270150

PLEASE NOTE

Cutting discs for use with stationary machines - from a swing cutting machine right up to a fully automatic machine with a control console and a closed working area. When choosing cutting discs for a stationary machines, please observe the maximum peripheral speed of 80 m/s or 100 m/s as recommended by the manufacturer. DRONCO also supplies discs for so-called "chop saws". These are swing-cutting machines with a driving power up to 2.4 kW/3 HP. Stationary cutting discs must never be used on free-hand machines!

Some general information

The following general information gives you the best possible overview about the features of our products.

① Description

Compiled for cutting discs as follows:

C/CS – silicone carbide is the

abrasive grain for cutting stone.

24 – indicates the grit size. The higher the number, the finer the grit. E.g.:

24 rough | 30 medium hard | 36 hard.

R – the second letter indicates the hardness of the disc. The further into the alphabet, the harder the disc.

BF – resin bonded, fibre-reinforced

② Product lines

perfect | evolution | special

Explanation see next page.

③ Green background

Is the colour coding for stone cutting discs.

④ Safety standards

Our products comply with the highest safety standards and regulations:

EN 12413 - cutting and grinding wheels

OSA - organisation for the safety of abrasives.

⑤ Expiry date

This quality cutting disc can be used without any restrictions until the indicated date.

(V month/year)

⑥ Measurements

Consist of (diameter of the disc)

x (thickness of the disc)

x (bore size).

Measurements given in mm and inch.

⑦ Max. rpm.

Indicates the
permitted maximum speed.

⑧ Safety information

Security information: For your own safety.

Please follow!

⑨ Red bar

Indicates 80 m/s as
permitted peripheral speed.

Green bar

Indicates 100 m/s as
permitted peripheral speed.

⑩ Made in Germany

Stands for proven quality -
most of our products are manufactured
and tested in Germany.

⑪ www.dronco.com

24 hr service on our website
- we are always there when you need us!

⑨ Safety information



STONE CUTTING DISCS



STONE
CUTTING DISCS



Product lines

For craftsmen or industrial use - two precisely co-ordinated product lines offer the right cutting disc for every user and every application. All discs comply with the relevant regulations, have a high specific cutting capacity and guarantee a maximum of safety.



perfect line

The best-seller. Everybody is convinced from its excellent price/performance ratio.

- good quality
- good lifetime
- good cutting efficiency



special line

Also in stone cutting discs, our special line offers specific solutions for industry and quality orientated craftsmen.

- very good quality
- very good cutting efficiency
- very good economic efficiency



Application chart stone cutting discs

	Page	Asphalt	Concrete	Roof tiles	Porous concrete	Granite	Sand-lime stone	Clinker brick	Marble	Tiles	Fireproof clay	Slate	Terrazzo	Earthenware pipes	Exposed aggregate concrete	Brick	Ductile pipes
FREE HAND STONE CUTTING DISCS																	
C 60 R PERFECT EXPRESS	48	●●	●	●	●	●	●	●	●●●	●●●	●	●●●	●	●	●	●	●
C 46 R PERFECT EXPRESS	49	●●	●	●	●	●	●	●	●●●	●●●	●	●●●	●	●	●	●	●
C 24 R PERFECT	50	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
CS 24 R SPECIAL	51	●	●●●	●●●	●	●	●●●	●	●	●	●	●	●	●●●	●●●	●●●	●
FREE HAND ASPHALT/DUCTILE CUTTING DISCS																	
CS 30 SPECIAL	51	●●●	●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●



Professional application

Top product: extremely fast cutting,
outstanding service life, minimum effort



Demanding application

Very good cutting performance, high service life



Standard application

Good cutting performance, good service life

You can get DRONCO stone cutting discs in different performance classes - from a standard product for occasional use up to the high-end product for professional applications.

▼ Free hand stone cutting discs

C 60 R	perfect express	Free hand	★★★☆
	<p>The excellent properties of thin cutting discs now available for stone: Incredibly fast cut, cutting edges absolutely free of chipping. Comfortable use due to reduced noise output and vibration. Up to 50% less development of dust during cutting.</p>		<p>Outstanding suitability for cutting tiles, marble, window shelves, slates etc.</p> 
<hr/>			
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115 x 1,2 x 22,23	4 1/2 x 3/64 x 7/8	13280	25
125 x 1,2 x 22,23	5 x 3/64 x 7/8	12200	25
POWER-PACK TIN C 60 R			
			
<p>10 stone cutting discs in the attractive and popular metal box. A big seller for guaranteed increased turnover.</p>			
<hr/>			
115 x 1,2 x 22,23	4 1/2 x 3/64 x 7/8	13280	1 Tin à 10
125 x 1,2 x 22,23	5 x 3/64 x 7/8	12200	1 Tin à 10
<hr/>			
<p>Each box includes 10 stone cutting discs C 60 R.</p>			
<hr/>			
115 x 1,2 x 22,23	4 1/2 x 3/64 x 7/8	13280	—
125 x 1,2 x 22,23	5 x 3/64 x 7/8	12200	—



C 46 R	perfect express	Free hand	★★★☆
			
<p>The excellent properties of thin cutting discs now available for stone: Incredibly fast cut, cutting edges absolutely free of chipping. Comfortable use due to reduced noise output and vibration. Up to 50% less abrasive dust during cutting.</p>		<p>For cutting floor tiles, wall tiles, marble, window shelves, slates, etc.</p>	
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
230 x 1,9 x 22,23	9 x 5/64 x 7/8	6600	25
SHAPE	ITEM CODE	BAR CODE	
	1238250100	4081600	157116

DRONCO Express®: Definitely Faster!



The asset in speed

- much higher cutting speed
- definitely faster cutting

The asset in precision

- excellent clean cut
- edges low in burrs and free of chipping
- minimum loss of material

The asset in comfort

- lowest possible force input
- at equal contact pressure
- a minimum of noise
- low in vibration
- little development of dust

C 24 R
perfect
Free hand



Good service life and fast cutting at a reasonable price.
The craftsman's disc that has proved itself in millions of cutting operations.

All types of material found on the construction site, such as concrete, stone, roof tiles, sand-lime stone.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
100 x 3 x 16	4 x 1/8 x 5/8	15250	25	—	1105015100	105001
100 x 3 x 16	4 x 1/8 x 5/8	15250	25	—	1107015100	107005
115 x 3 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1115015100	115000
115 x 3 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1117015100	117004
125 x 3 x 22,23	5 x 1/8 x 7/8	12200	25	—	1125015100	125009
125 x 3 x 22,23	5 x 1/8 x 7/8	12200	25	—	1127015100	127003
180 x 3 x 22,23	7 x 1/8 x 7/8	8600	25	—	1185015100	145007
180 x 3 x 22,23	7 x 1/8 x 7/8	8600	25	—	1187015100	147001
230 x 3 x 22,23	9 x 1/8 x 7/8	6600	25	—	1235015100	155006
230 x 3 x 22,23	9 x 1/8 x 7/8	6600	25	—	1237015100	157000
300 x 4,0 x 22,23	12 x 5732 x 7/8	5100	25	—	1305036100	165012



STONE CUTTING DISCS



CS 24 R

special

Free hand

★★★☆



Stone cutting disc for diverse uses on the construction site.

Cuts granite, concrete, brick and other construction site materials effectively. Also perfectly suitable for ceramic, porcelain and marble.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 3 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1116015100	116007
115 x 3 x 22,23	4 1/2 x 1/8 x 7/8	13280	25	—	1118015100	118001
125 x 3 x 22,23	5 x 1/8 x 7/8	12200	25	—	1126015100	126006
125 x 3 x 22,23	5 x 1/8 x 7/8	12200	25	—	1128015100	128000
180 x 3 x 22,23	7 x 1/8 x 7/8	8600	25	—	1186015100	146004
230 x 3 x 22,23	9 x 1/8 x 7/8	6600	25	—	1236015100	156003
230 x 3 x 22,23	9 x 1/8 x 7/8	6600	25	—	1238015100	158007
300 x 4 x 20	12 x 5/32 x 3/4	5100	25	—	1306035100	166002
300 x 4 x 22,23	12 x 5/32 x 7/8	5100	25	—	1306036100	166019
350 x 4 x 20	14 x 5/32 x 3/4	5500	10	—	1356035100	176001
350 x 4 x 25,4	14 x 5/32 x 1	5500	10	—	1356037100	176025

Free hand asphalt/ductile cutting discs

CS 30 ASPHALT/DUKTIL

special

Free hand

★★★☆



Very good special disc which shows excellent results not only in cement/cast composition of ductile pipes but also in asphalt and other constructions site materials.

Ductile pipes, porous concrete, roof tiles, sand-lime stone and earthenware pipes. Very economic in asphalt (even with aggregates).

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
300 x 4 x 20	12 x 5/32 x 3/4	5100	25	—	1306135100	166040
350 x 4 x 20	14 x 5/32 x 3/4	5500	10	—	1356135100	176087

Some general information

The following information gives you the best possible overview about the features of our products.

① Description

Compiled for grinding discs as follows:

A/CS – aluminium oxide/silicone carbide is the abrasive grain for grinding metal/stone.

AZ – zirconium corundum is the abrasive grit for better life time and grinding efficiency.

30 – indicates the grit size. The higher the number, the finer the grit.

E.g.: 24 rough | 30 medium | 36 fine ...

S – the second letter indicates the hardness of the disc. The further into the alphabet, the harder the disc.

② Product lines

perfect | evolution | special

Explanation see next page.

③ Red background

Is the colour coding for grinding discs.

④ Safety standards

Our products comply with the highest safety standards and regulations:

EN 12413 - cutting and grinding wheels

OSA - organisation for the safety of abrasives.

⑤ Expiry date

This quality cutting disc can be used without any restrictions until the indicated date.

(V month/year)

⑥ FE/S/CI ≤ 0,1%

Free from iron, sulphur and chlorine.

Special disc for cutting stainless steel.

⑦ Measurements

Consist of (diameter of the disc)

x (thickness of the disc)

x (bore size).

Measurements given in mm and inch.

⑧ Max. rpm.

Indicates the permitted maximum speed.

⑨ Red bar

Indicates 80 m/s as permitted peripheral speed.

Green bar

Indicates 100 m/s as permitted peripheral speed.

⑩ Safety information

Security information: For your own safety.

Please follow!

⑪ Made in Germany

Stands for proven quality - most of our products are manufactured and tested in Germany.

⑫ www.dronco.com

24 hr service on our website

- we are always there when you need us!

⑯ Safety information



GRINDING DISCS



Product lines

For craftsmen or industrial use - three precisely co-ordinated product lines offer the right grinding disc for every user and every application. All discs comply with the relevant regulations, have a high specific grinding capacity and guarantee a maximum of safety.



perfect line

The best-seller. Not only brilliant with its price/performance ratio. It has proven itself a million times. The perfect line shows best results on every angle grinder.


- resin bonded
- reinforced with glass fibre
- good lifetime
- good removal rate



special line

Professional use needs for every application the right disc. Therefore abrasive grits and bonds match exactly the material - this increases the performance and minimises the working time.

- very good lifetime
- very „aggressive“ disc
- very good removal rate
- very good economic efficiency

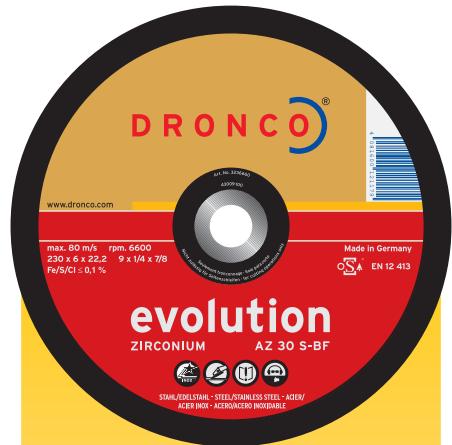

evolution line

The high end line for highest demands. These grinding discs have a brilliant lifetime and outstanding grinding efficiency at minimal effort.

- outstanding lifetime
- best raw materials
- maximum removal rate



Application chart grinding discs metal

	page	Unalloyed and alloyed construction steel	Very solid construction steel	Tool steel	High-alloy special steel	Sheet steel	Stainless sheet steel	Welding seams	Cast	Non-ferrous metals
GRINDING DISCS STEEL										
A 30 T PERFECT	56	●●	●	●	●	●	●	●	●	●
AS 30 R SPECIAL	56	●●	●●	●●	●●	●	●●	●●	●●	●●
AS 24/30 T SPECIAL	57	●●	●	●	●●	●●	●●	●●	●●	●●
GRINDING DISCS STAINLESS STEEL/STEEL										
AS 30 S INOX SPECIAL	57	●	●	●	●●	●	●●	●	●	●
AS 30 T INOX SPECIAL	58	●	●	●●	●●	●	●●	●●	●	●
AZ 30 S EVOLUTION	58	●●	●	●●	●●	●	●●	●●	●●	●●
AZ 30 T EVOLUTION	58	●●	●	●●	●●	●	●●	●●	●●	●●
AK 36 T EVOLUTION CERAMAXX	59	●●	●●	●●	●●	●●	●●	●●	●●	●●
AK 24 V EVOLUTION CERAMAXX	59	●●	●●	●●	●●	●●	●●	●●	●●	●●
GRINDING DISCS CAST										
AS 24 S CAST/IRON SPECIAL	60	●				●		●●	●●	●●
GRINDING DISCS ALUMINIUM										
AS 46 ALU SPECIAL	60	●				●		●	●	●
MINI-GRINDING DISCS										
AS 46 T MINI SPECIAL	61	●	●	●	●	●	●	●	●	●

Application chart grinding discs stone

	page	Concrete	Granite	Sand-lime stone	Clinker brick	Marble	Porcelain	Fireproof clay	Slate	Terrazzo	Earthenware pipes	Exposed aggregate concrete
GRINDING DISCS STONE												
CS 30 S SPECIAL	61	●●	●	●●	●	●	●	●	●	●	●	●



Professional application

Top product: extremely aggressive stock removal,
outstanding service life, minimum effort



Demanding application

Very good stock removal, high service life



Standard application

Good stock removal, good service life

You can get DRONCO grinding discs in different performance classes - from a standard product for occasional use up to the high-end product for professional applications.

▼ Grinding discs steel

A 30 T	perfect	metal	★★★☆☆
	Good all-purpose disc with a good service life.	All types of metal, primarily sheet steel, construction steel and welding seams.	
All types of metal, primarily sheet steel, construction steel and welding seams.			
DIMENSION MM			
100 x 6 x 16	4 x 1/4 x 5/8	SPEED R.P.M.	CONTENT PC.
115 x 6 x 22,23	4 1/2 x 1/4 x 7/8	15250	10
125 x 6 x 22,23	5 x 1/4 x 7/8	13280	10
150 x 6 x 22,23	6 x 1/4 x 7/8	12200	10
180 x 6 x 22,23	7 x 1/4 x 7/8	10200	10
180 x 8 x 22,23	7 x 5/16 x 7/8	8600	10
230 x 6 x 22,23	9 x 1/4 x 7/8	6600	10
230 x 8 x 22,23	9 x 5/16 x 7/8	6600	10
ITEM CODE		BAR CODE	
3106040100		4081600	300024
3116040100			310023
3126040100			320022
3156040100			330021
3186041100			340020
3188040100			340082
3236041100			350029
3238040100			350067

AS 30 R	special	metal	★★★☆☆
	Very good grinding disc with a particularly long service life.	All types of construction steel and tool steel, welding seams, cast.	
All types of construction steel and tool steel, welding seams, cast.			
DIMENSION MM			
115 x 6 x 22,23	4 1/2 x 1/4 x 7/8	SPEED R.P.M.	CONTENT PC.
125 x 4 x 22,23	5 x 5/32 x 7/8	13280	10
125 x 6 x 22,23	5 x 1/4 x 7/8	12200	10
150 x 6 x 22,23	6 x 1/4 x 7/8	10200	10
180 x 6 x 22,23	7 x 1/4 x 7/8	8600	10
230 x 6 x 22,23	9 x 1/4 x 7/8	6600	10
ITEM CODE		BAR CODE	
3116500100		4081600	313000
3124500100			323016
3126500100			323009
3156500100			333008
3186500100			343014
3236500100			353006



AS 24/30 T

special

metal

★★★★



All-purpose grinding disc with medium-hard bonding for light grinding operations, offering good metal removal rate and a long service life.

Very solid construction steel, tool steel, high-speed steel, and sheet steel.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE
115 x 6 x 22,23	4 1/2 x 1/4 x 7/8	13280	10	—	3116520100	313055
125 x 6 x 22,23	5 x 1/4 x 7/8	12200	10	—	3126520100	323047
150 x 6 x 22,23	6 x 1/4 x 7/8	10200	10	—	3156520100	333046
180 x 6 x 22,23	7 x 1/4 x 7/8	8600	10	—	3186520100	343052
230 x 6 x 22,23	9 x 1/4 x 7/8	6600	10	—	3236520100	353068

Grinding discs stainless steel/steel

AS 30 S INOX

special

metal

★★★★☆



Free of iron, chlorine and sulphur, medium-hard special disc with high grinding performance for rust-free surfaces. $FE / S / Cl \leq 0,1\%$

High-alloy special steel, high-alloy stainless steel and stainless steel sheet.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE
100 x 6 x 16	4 x 1/4 x 5/8	15250	10	—	3106540100	303063
115 x 4 x 22,23	4 1/2 x 5/32 x 7/8	13280	10	—	3114540100	313093
115 x 6 x 22,23	4 1/2 x 1/4 x 7/8	13280	10	—	3116540100	313062
125 x 4 x 22,23	5 x 5/32 x 7/8	12200	10	—	3124540100	323030
125 x 6 x 22,23	5 x 1/4 x 7/8	12200	10	—	3126540100	323061
150 x 4 x 22,23	6 x 5/32 x 7/8	10200	10	—	3154540100	333053
150 x 6 x 22,23	6 x 1/4 x 7/8	10200	10	—	3156540100	333060
180 x 6 x 22,23	7 x 1/4 x 7/8	8600	10	—	3186540100	343090
230 x 6 x 22,23	9 x 1/4 x 7/8	6600	10	—	3236540100	353051

AS 30 T INOX	special	metal	★★★★
	<p>Our premium grinding disc for applications on stainless steel. Extremely long service life at comfortable, vibration-optimized operation. Outstanding stock removal rate and easy to use. No clogging, no chattering - a special tool for special applications!</p> <p>FE/S/Cl ≤ 0,1%</p>		<p>For stainless steel, high-alloy stainless steel, sheet stainless steel, rust and acid resistant steel, non-ferrous metal.</p>
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115 x 7 x 22,23	4 1/2 x 9/32 x 7/8	13280	10
125 x 7 x 22,23	5 x 9/32 x 7/8	12200	10
180 x 7 x 22,23	7 x 9/32 x 7/8	8600	10
230 x 7 x 22,23	9 x 9/32 x 7/8	6600	10
AZ 30 S	evolution	metal	★★★★
	<p>Medium-hard grinding disc with zirconium corundum which distinguishes especially through a very high lifetime and a outstanding removal rate at minimum effort.</p> <p>FE/S/Cl ≤ 0,1%</p>		<p>Stainless steel, high alloyed stainless steel, stainless sheet steel, non ferrous metal, cast</p>
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115 x 6 x 22,23	4 1/2 x 1/4 x 7/8	13280	10
125 x 6 x 22,23	5 x 1/4 x 7/8	12200	10
150 x 6 x 22,23	6 x 1/4 x 7/8	10200	10
180 x 6 x 22,23	7 x 1/4 x 7/8	8600	10
230 x 6 x 22,23	9 x 1/4 x 7/8	6600	10
AZ 30 T	evolution	metal	★★★★
	<p>Grinding disc containing 25% zirconium. The perfect mixture of zirconium corundum and semi-friable fused aluminium oxide offers the following advantages:</p> <ul style="list-style-type: none"> ► very high stock removal rate (even on stainless steel) ► great lifetime ► excellent price-performance-ratio 		<p>For stainless steel, high alloyed stainless steel, stainless sheet steel, non ferrous metals and cast.</p> <p>FE/S/Cl ≤ 0,1 %.</p>
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115 x 6,0 x 22,23	4 1/2 x 1/4 x 7/8	13280	10
125 x 6,0 x 22,23	5 x 1/4 x 7/8	12200	10
230 x 6,0 x 22,23	9 x 1/4 x 7/8	6600	10



CERAMAXX

OUR STRONGEST DISCS!
WITH CERAMIC GRAIN OF THE LATEST GENERATION
GIVING AN ULTIMATELY INCREASED PERFORMANCE

- ▶ Durably aggressive removal performance = high productivity
- ▶ Lowest energy input = sparing for man and machine
- ▶ Quiet-running and smooth grinding = comfortable handling
- ▶ Cool grinding without thermal blueing = less rework
- ▶ Excellent lifetime = reduced disc consumption

AK 36 T CeraMaxx	evolution	metal	★★★★																					
 <p>The Evolution AK 36 T is the first 3 mm grinding disc with ceramic grain which does not require a backing pad and which can simultaneously be used as a fully-fledged cutting disc. CeraMaxx discs are among the fastest, most aggressive and most durable on the market giving greatly increased productivity and efficiency with maximum removal rates and an unmatched speed of grinding performance.</p> <p>Ideal for users from pipeline engineering and construction, shipyards, metal engineering, foundries, commercial vehicle construction, steel construction, plant engineering, crane construction, construction machine production.</p> <table border="1"> <thead> <tr> <th>DIMENSION MM</th><th>DIMENSION INCH</th><th>SPEED R.P.M.</th><th>CONTENT PC.</th><th>SHAPE</th><th>ITEM CODE</th><th>BAR CODE</th></tr> </thead> <tbody> <tr> <td>115 x 3 x 22,23</td><td>4 1/2 x 1/8 x 7/8</td><td>13280</td><td>10</td><td>—</td><td>3113551100</td><td>311112</td></tr> <tr> <td>125 x 3 x 22,23</td><td>5 x 1/8 x 7/8</td><td>12200</td><td>10</td><td>—</td><td>3123551100</td><td>320145</td></tr> </tbody> </table>	DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE	115 x 3 x 22,23	4 1/2 x 1/8 x 7/8	13280	10	—	3113551100	311112	125 x 3 x 22,23	5 x 1/8 x 7/8	12200	10	—	3123551100	320145			<p>Combined grinding and cutting disc for the preparation and removal of welding seams, removal of welding splatter, descaling, rough deburring and grinding on stainless steel and steel. Fe/S/Cl ≤ 0,1 %.</p> <p>ceramic INSIDE 2.0</p>
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE																		
115 x 3 x 22,23	4 1/2 x 1/8 x 7/8	13280	10	—	3113551100	311112																		
125 x 3 x 22,23	5 x 1/8 x 7/8	12200	10	—	3123551100	320145																		

AK 24 V CeraMaxx	evolution	metal	★★★★																																																	
 <p>High performance grinding disc with increased productivity and up to three times higher material removal compared to standard discs. Maximum aggressiveness with comfortable handling. Better efficiency thanks to an enormous lifetime. Excellent performance at low pressure.</p> <p>Ideal for users from pipeline engineering and construction, shipyards, metal engineering, foundries, commercial vehicle construction, steel construction, plant engineering, crane construction, construction machine production.</p> <table border="1"> <thead> <tr> <th>DIMENSION MM</th><th>DIMENSION INCH</th><th>SPEED R.P.M.</th><th>CONTENT PC.</th><th>SHAPE</th><th>ITEM CODE</th><th>BAR CODE</th></tr> </thead> <tbody> <tr> <td>115 x 7 x 22,23</td><td>4 1/2 x 9/32 x 7/8</td><td>13280</td><td>10</td><td>—</td><td>3117561100</td><td>313192</td></tr> <tr> <td>125 x 4 x 22,23</td><td>5 x 5/32 x 7/8</td><td>12200</td><td>10</td><td>—</td><td>3124560100</td><td>323191</td></tr> <tr> <td>125 x 7 x 22,23</td><td>5 x 9/32 x 7/8</td><td>12200</td><td>10</td><td>—</td><td>3127560100</td><td>323405</td></tr> <tr> <td>150 x 7 x 22,23</td><td>6 x 9/32 x 7/8</td><td>10200</td><td>10</td><td>—</td><td>3157560100</td><td>333084</td></tr> <tr> <td>180 x 7 x 22,23</td><td>7 x 9/32 x 7/8</td><td>8600</td><td>10</td><td>—</td><td>3187560100</td><td>343403</td></tr> <tr> <td>230 x 7 x 22,23</td><td>9 x 9/32 x 7/8</td><td>6600</td><td>10</td><td>—</td><td>3237561100</td><td>353211</td></tr> </tbody> </table>	DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE	115 x 7 x 22,23	4 1/2 x 9/32 x 7/8	13280	10	—	3117561100	313192	125 x 4 x 22,23	5 x 5/32 x 7/8	12200	10	—	3124560100	323191	125 x 7 x 22,23	5 x 9/32 x 7/8	12200	10	—	3127560100	323405	150 x 7 x 22,23	6 x 9/32 x 7/8	10200	10	—	3157560100	333084	180 x 7 x 22,23	7 x 9/32 x 7/8	8600	10	—	3187560100	343403	230 x 7 x 22,23	9 x 9/32 x 7/8	6600	10	—	3237561100	353211			<p>CeraMaxx grinding discs are ideally suitable for demanding grinding works: Preparation and removal of welding seams, removal of welding splatter, descaling, rough deburring and grinding on stainless steel and steel. Fe/S/Cl ≤ 0,1 %.</p> <p>ceramic INSIDE 2.0</p>
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE																																														
115 x 7 x 22,23	4 1/2 x 9/32 x 7/8	13280	10	—	3117561100	313192																																														
125 x 4 x 22,23	5 x 5/32 x 7/8	12200	10	—	3124560100	323191																																														
125 x 7 x 22,23	5 x 9/32 x 7/8	12200	10	—	3127560100	323405																																														
150 x 7 x 22,23	6 x 9/32 x 7/8	10200	10	—	3157560100	333084																																														
180 x 7 x 22,23	7 x 9/32 x 7/8	8600	10	—	3187560100	343403																																														
230 x 7 x 22,23	9 x 9/32 x 7/8	6600	10	—	3237561100	353211																																														

▼ Grinding discs cast

AS 24 S Cast/Iron	special	metal	★★★★
	<p>New grinding disc for the industrial processing of cast-iron. This disc is made to ensure an excellent removal rate together with an extremely long service life. Low vibration for operator convenience therefore giving longer usage are the prime features of this development. No clogging, no chattering - a special tool for special applications!</p>		<p>High performance blade for use on cast-iron.</p>
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
180 x 7 x 22,23	7 x 9/32 x 7/8	8600	10
230 x 7 x 22,23	9 x 9/32 x 7/8	6600	10

▼ Grinding discs aluminium

AS 46 ALU	special	metal	★★★★☆
	<p>Special disc designed to grind aluminium and non-ferrous metals. The composition of the material prevents clogging and improves performance and service life noticeably.</p>		<p>Copper, aluminium alloys, brass, bronze, cast.</p>
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.
115 x 6 x 22,23	4 1/2 x 1/4 x 7/8	13280	10
125 x 6 x 22,23	5 x 1/4 x 7/8	12200	10
150 x 6 x 22,23	6 x 1/4 x 7/8	10200	10
180 x 6 x 22,23	7 x 1/4 x 7/8	8600	10
230 x 6 x 22,23	9 x 1/4 x 7/8	6600	10



▼ Mini grinding discs

AS 46 T	special	metal	★★★☆			
			The small grinding disc for pneumatic grinders. This disc offers a means of reaching areas that are difficult to get at.			
Good performance on construction steel, tool steel and high-speed steel.						
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
60 x 6 x 6	2 3/8 x 1/4 x 1/4	25450	10	—	6406000100	642551
76 x 6 x 10	3 x 1/4 x 3/8	20100	10	—	6407600100	642742

Mini cutting discs and tensioning shafts for mini grinding discs can be found on page 40.

▼ Grinding discs stone

CS 30 S	special	stone	★★★☆			
			Medium-hard grinding disc with very good removal rate and a long service life, suitable for grinding both edges and surfaces.			
Grinding stone and concrete.						
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 6 x 22,23	4 1/2 x 1/4 x 7/8	13280	10	—	3116660100	313109
125 x 6 x 22,23	5 x 1/4 x 7/8	12200	10	—	3126660100	323108
180 x 6 x 22,23	7 x 1/4 x 7/8	8600	10	—	3186660100	343106
230 x 6 x 22,23	9 x 1/4 x 7/8	6600	10	—	3236660100	353105

Some general information

The following information gives you the best possible overview about the features of our products.

① Description

A - normal corundum is the abrasive band for mild steel.

AZ - Zirconium corundum is the abrasive band for stainless steel.

AK - Ceramic grain is the new, self sharpening abrasive band for steel, stainless steel, high alloy steel, brass and bronze.

40 - indicates the grit size.

The higher the number, the finer the grit.

E.g.: 40 rough | 60 medium

80 fine | 120 very fine

② Product lines

perfect | evolution | special

Explanation see next page.

③ Yellow background

Is the colour coding for flap discs.

④ Safety standards

Our products comply with the highest safety standards and regulations:

EN 13743 - flap discs

OSA - organisation for the safety of abrasives

⑤ Measurements

Consist of (diameter of the disc)

x (bore size).

Measurements given in mm and inch.

⑥ Max. rpm.

Indicates the permitted maximum speed.

⑦ Red bar

Indicates 80 m/s as permitted peripheral speed.

⑧ Safety information

For your own safety. Please follow!

⑨ www.dronco.com

24 hr service on our website

- we are always there when you need us!

⑧ Safety information



↑
Do not use
if damaged

↓
working on metal



↑
working on stone

↓
working on stainless steel



↑
stationary discs: for
stationary machines only



↑
Follow the safety instruc-
tions of the producer of
the power tool.

↓
Follow the protective measures



↑
Cutting



Product lines

For craftsmen or industrial use - three precisely coordinated product lines offer the right flap disc for every user and every application. All discs comply with the relevant regulations, have a high specific grinding capacity and guarantee a maximum of safety.



perfect line

The best-seller. It has proven itself a million times. The abrasive band made of normal corundum enables a good material removal rate compared with a very attractive price.

- good material removal rate
- good lifetime
- very good price-performance ratio



special line

Effective, long-lasting and economical. Flap discs from our special line with abrasive bands made of zirconium corundum are optimised for grinding on edges and surfaces in industrial use as well as for craftsmen - this increases the performance and reduces the working time.

- very good lifetime
- no clogging
- very good material removal rate
- easy working



evolution line

The high-end line for highest demands. These flap discs offer outstanding lifetime, plus high removal rate with minimum effort.

- outstanding lifetime
- best raw materials
- outstanding material removal rate
- optimum efficiency



Professional application

Top product: extremely aggressive stock removal, outstanding service life, minimum effort



Demanding application

Very good stock removal, high service life



Standard application

Good stock removal, good service life

You can get DRONCO flap discs in different performance classes - from a standard product for occasional use up to the high-end product for professional applications.



Application chart flap discs

	Page	unalloyed and alloyed construction steel	Very solid construction steel	tool steel	high alloy special steel	sheet steel	stainless sheet steel	welding seams	cast	non-ferrous metals	wood	plastic	filling compound	stone
FLAP DISCS NORMAL CORUNDUM														
PERFECT G-A	66	●●●	●●●	●●●	●	●●●	●●●	●	●●●	●	●●●	●●●	●●●	●●●
FLAP DISCS ZIRCONIUM CORUNDUM														
SPECIAL G-AZ A	67	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●
SPECIAL K-AZ A	68	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●
SPECIAL J-AZ A JET	69	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●
SPECIAL G-AZ	70	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●
EVOLUTION G-AZ MAXX	71	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●
FLAP DISCS CERAMIC GRAIN														
EVOLUTION G-AK	72	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●
EVOLUTION J-AK JET	73	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●
FLAP DISCS SILICON CARBIDE														
PERFECT G-C	74													●●●

Evolution AZ Maxx zirconium corundum flap disc

same advantages as AZA


- increased height of lamellas
- steeper arrangement of lamellas
- aggressive material removal rate

Perfect A normal corundum flap disc

- tough and hard abrasive grain
- good removal capacity, especially for surface work
- good service life

Perfect C silicon carbide flap disc

- polyester backing
- very hard abrasive grain
- for stone treatment
- good removal rate

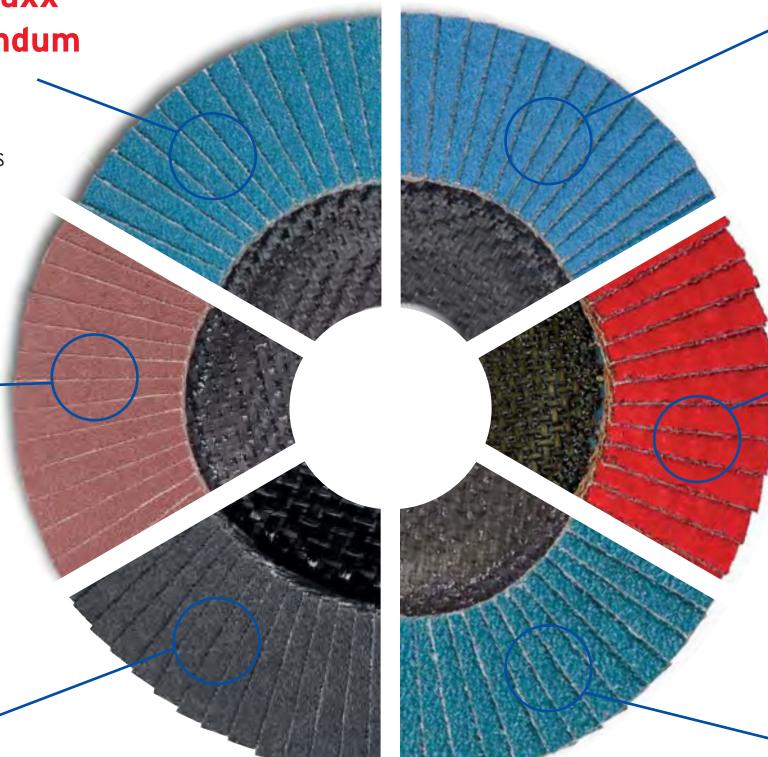

Special AZ zirconium corundum flap disc


- abrasive grain is less hard, but very tough
- for working on edges and stainless steel
- brilliant grinding capacity
- outstanding service life

Evolution AK ceramic grain flap disc

- self-sharpening
- robust polyester backing
- permanent extremely high stock removal
- cool grinding on surfaces and edges
- improved service life

Special AZA zirconium corundum flap disc

- support of the abrasive band consists of a cotton twill
- for surface grinding on steel and stainless steel
- good grinding capacity
- outstanding service life
- no clogging up

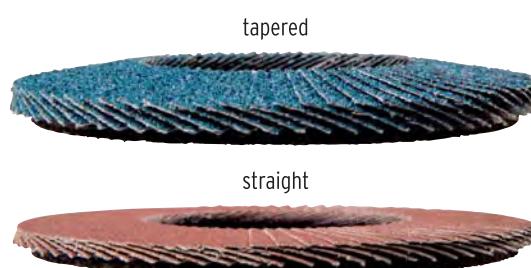

▼ Flap discs normal corundum

G-A	perfect	Normal corundum	★★★☆☆			
						
<p>Reasonably priced product suitable for grinding steel and wood. Tough, hard abrasive grain permits good removal capacity, especially for surface work. The glass fibre backing is characterised by an even grinding finish until all of the abrasive grain has been worn away.</p> <p>Leaves no scratches on the workpiece.</p> <p>Packing unit: 10 pcs.</p> <ul style="list-style-type: none"> ● The best-seller with an excellent price/performance ratio. ● Good stock removal in a wide range of applications. 						
<p>Steel, wood, aluminium</p>						
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	SHAPE	ITEM-CODE	BAR CODE 4081600
115 x 22,23	4 1/2 x 7/8	13280	40	straight	5211004100	510508
115 x 22,23	4 1/2 x 7/8	13280	60	straight	5211006100	510515
115 x 22,23	4 1/2 x 7/8	13280	80	straight	5211007100	510522
115 x 22,23	4 1/2 x 7/8	13280	120	straight	5211009100	510546
115 x 22,23	4 1/2 x 7/8	13280	40	tapered	5211204100	510003
115 x 22,23	4 1/2 x 7/8	13280	60	tapered	5211206100	510010
115 x 22,23	4 1/2 x 7/8	13280	80	tapered	5211207100	510027
115 x 22,23	4 1/2 x 7/8	13280	120	tapered	5211209100	510041
125 x 22,23	5 x 7/8	12200	40	straight	5212004100	520507
125 x 22,23	5 x 7/8	12200	60	straight	5212006100	520514
125 x 22,23	5 x 7/8	12200	80	straight	5212007100	520521
125 x 22,23	5 x 7/8	12200	120	straight	5212009100	520545
125 x 22,23	5 x 7/8	12200	40	tapered	5212204100	521108
125 x 22,23	5 x 7/8	12200	60	tapered	5212206100	521115
125 x 22,23	5 x 7/8	12200	80	tapered	5212207100	521122
125 x 22,23	5 x 7/8	12200	120	tapered	5212209100	521146
180 x 22,23	7 x 7/8	8600	40	straight	5218004100	540505
180 x 22,23	7 x 7/8	8600	60	straight	5218006100	540512
180 x 22,23	7 x 7/8	8600	80	straight	5218007100	540529
180 x 22,23	7 x 7/8	8600	40	tapered	5218204100	542004
180 x 22,23	7 x 7/8	8600	60	tapered	5218206100	542011
180 x 22,23	7 x 7/8	8600	80	tapered	5218207100	542028



▼ Flap discs zirconium corundum

G-AZ A	special	Zirconium corundum	★★★★☆																																																																																																																																																										
	The support of the abrasive band consists of a cotton twill which shows an outstanding removing rate and excellent lifetime - without clogging up! The glass fibre backing is characterised by an even grinding finish up to the complete consumption of the abrasive grain. As a result, no scratches on the workpiece will appear. Packing unit: 10 pcs.		Mild steel, stainless steel, etc.																																																																																																																																																										
<ul style="list-style-type: none"> ▷ Ideal for grinding surfaces of mild and stainless steel. ▷ Very good stock removal and effortless working without clogging. 																																																																																																																																																													
<table border="1"> <thead> <tr> <th>DIMENSION MM</th><th>DIMENSION INCH</th><th>SPEED R.P.M.</th><th>GRIT SIZE</th><th>SHAPE</th><th>ITEM-CODE</th><th>BAR CODE</th></tr> </thead> <tbody> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>40</td><td>straight</td><td>5211184100</td><td>511703</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>60</td><td>straight</td><td>5211186100</td><td>511710</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>80</td><td>straight</td><td>5211187100</td><td>511727</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>120</td><td>straight</td><td>5211189100</td><td>511734</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>40</td><td>tapered</td><td>5211384100</td><td>512809</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>60</td><td>tapered</td><td>5211386100</td><td>512816</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>80</td><td>tapered</td><td>5211387100</td><td>512823</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>120</td><td>tapered</td><td>5211389100</td><td>512830</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>40</td><td>straight</td><td>5212184100</td><td>521702</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>60</td><td>straight</td><td>5212186100</td><td>521719</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>80</td><td>straight</td><td>5212187100</td><td>521726</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>120</td><td>straight</td><td>5212189100</td><td>521733</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>40</td><td>tapered</td><td>5212384100</td><td>522808</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>60</td><td>tapered</td><td>5212386100</td><td>522815</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>80</td><td>tapered</td><td>5212387100</td><td>522822</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>120</td><td>tapered</td><td>5212389100</td><td>522839</td></tr> <tr><td>180 x 22,23</td><td>7 x 7/8</td><td>8600</td><td>40</td><td>straight</td><td>5218184100</td><td>541700</td></tr> <tr><td>180 x 22,23</td><td>7 x 7/8</td><td>8600</td><td>60</td><td>straight</td><td>5218186100</td><td>541717</td></tr> <tr><td>180 x 22,23</td><td>7 x 7/8</td><td>8600</td><td>40</td><td>tapered</td><td>5218384100</td><td>542806</td></tr> <tr><td>180 x 22,23</td><td>7 x 7/8</td><td>8600</td><td>60</td><td>tapered</td><td>5218386100</td><td>542813</td></tr> <tr><td>180 x 22,23</td><td>7 x 7/8</td><td>8600</td><td>80</td><td>tapered</td><td>5218387100</td><td>542820</td></tr> </tbody> </table>				DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	SHAPE	ITEM-CODE	BAR CODE	115 x 22,23	4 1/2 x 7/8	13280	40	straight	5211184100	511703	115 x 22,23	4 1/2 x 7/8	13280	60	straight	5211186100	511710	115 x 22,23	4 1/2 x 7/8	13280	80	straight	5211187100	511727	115 x 22,23	4 1/2 x 7/8	13280	120	straight	5211189100	511734	115 x 22,23	4 1/2 x 7/8	13280	40	tapered	5211384100	512809	115 x 22,23	4 1/2 x 7/8	13280	60	tapered	5211386100	512816	115 x 22,23	4 1/2 x 7/8	13280	80	tapered	5211387100	512823	115 x 22,23	4 1/2 x 7/8	13280	120	tapered	5211389100	512830	125 x 22,23	5 x 7/8	12200	40	straight	5212184100	521702	125 x 22,23	5 x 7/8	12200	60	straight	5212186100	521719	125 x 22,23	5 x 7/8	12200	80	straight	5212187100	521726	125 x 22,23	5 x 7/8	12200	120	straight	5212189100	521733	125 x 22,23	5 x 7/8	12200	40	tapered	5212384100	522808	125 x 22,23	5 x 7/8	12200	60	tapered	5212386100	522815	125 x 22,23	5 x 7/8	12200	80	tapered	5212387100	522822	125 x 22,23	5 x 7/8	12200	120	tapered	5212389100	522839	180 x 22,23	7 x 7/8	8600	40	straight	5218184100	541700	180 x 22,23	7 x 7/8	8600	60	straight	5218186100	541717	180 x 22,23	7 x 7/8	8600	40	tapered	5218384100	542806	180 x 22,23	7 x 7/8	8600	60	tapered	5218386100	542813	180 x 22,23	7 x 7/8	8600	80	tapered	5218387100	542820
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	SHAPE	ITEM-CODE	BAR CODE																																																																																																																																																							
115 x 22,23	4 1/2 x 7/8	13280	40	straight	5211184100	511703																																																																																																																																																							
115 x 22,23	4 1/2 x 7/8	13280	60	straight	5211186100	511710																																																																																																																																																							
115 x 22,23	4 1/2 x 7/8	13280	80	straight	5211187100	511727																																																																																																																																																							
115 x 22,23	4 1/2 x 7/8	13280	120	straight	5211189100	511734																																																																																																																																																							
115 x 22,23	4 1/2 x 7/8	13280	40	tapered	5211384100	512809																																																																																																																																																							
115 x 22,23	4 1/2 x 7/8	13280	60	tapered	5211386100	512816																																																																																																																																																							
115 x 22,23	4 1/2 x 7/8	13280	80	tapered	5211387100	512823																																																																																																																																																							
115 x 22,23	4 1/2 x 7/8	13280	120	tapered	5211389100	512830																																																																																																																																																							
125 x 22,23	5 x 7/8	12200	40	straight	5212184100	521702																																																																																																																																																							
125 x 22,23	5 x 7/8	12200	60	straight	5212186100	521719																																																																																																																																																							
125 x 22,23	5 x 7/8	12200	80	straight	5212187100	521726																																																																																																																																																							
125 x 22,23	5 x 7/8	12200	120	straight	5212189100	521733																																																																																																																																																							
125 x 22,23	5 x 7/8	12200	40	tapered	5212384100	522808																																																																																																																																																							
125 x 22,23	5 x 7/8	12200	60	tapered	5212386100	522815																																																																																																																																																							
125 x 22,23	5 x 7/8	12200	80	tapered	5212387100	522822																																																																																																																																																							
125 x 22,23	5 x 7/8	12200	120	tapered	5212389100	522839																																																																																																																																																							
180 x 22,23	7 x 7/8	8600	40	straight	5218184100	541700																																																																																																																																																							
180 x 22,23	7 x 7/8	8600	60	straight	5218186100	541717																																																																																																																																																							
180 x 22,23	7 x 7/8	8600	40	tapered	5218384100	542806																																																																																																																																																							
180 x 22,23	7 x 7/8	8600	60	tapered	5218386100	542813																																																																																																																																																							
180 x 22,23	7 x 7/8	8600	80	tapered	5218387100	542820																																																																																																																																																							

K-AZ A	special	Zirconium corundum	★★★★☆																																																								
	<p>Flap disc with glass fibre reinforced plastic backing available in type "straight" only.</p> <p>Newly developed zirconium abrasive cloth with outstanding material removal rate and service life. Does not leave any marks on the work piece.</p> <p>Packaging unit: 10 pcs.</p> <ul style="list-style-type: none"> ▷ no scratches, no markings of the work piece ▷ newly developed abrasive cloth ▷ extremely tough reinforced plastic backing ▷ outstanding removal rate ▷ excellent lifetime ▷ can be used on the outer edge 		For surface and edge grinding.																																																								
<table border="1"> <thead> <tr> <th>DIMENSION MM</th><th>DIMENSION INCH</th><th>SPEED R.P.M.</th><th>GRIT SIZE</th><th>CONTENT PC</th><th>SHAPE</th><th>ITEM-CODE</th><th>BAR CODE 4081600</th></tr> </thead> <tbody> <tr> <td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>40</td><td>10</td><td>straight</td><td>5111184100</td><td>514643</td></tr> <tr> <td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>60</td><td>10</td><td>straight</td><td>5111186100</td><td>514667</td></tr> <tr> <td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>80</td><td>10</td><td>straight</td><td>5111187100</td><td>514674</td></tr> <tr> <td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>40</td><td>10</td><td>straight</td><td>5112184100</td><td>524642</td></tr> <tr> <td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>60</td><td>10</td><td>straight</td><td>5112186100</td><td>524666</td></tr> <tr> <td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>80</td><td>10</td><td>straight</td><td>5112187100</td><td>524673</td></tr> </tbody> </table>				DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	CONTENT PC	SHAPE	ITEM-CODE	BAR CODE 4081600	115 x 22,23	4 1/2 x 7/8	13280	40	10	straight	5111184100	514643	115 x 22,23	4 1/2 x 7/8	13280	60	10	straight	5111186100	514667	115 x 22,23	4 1/2 x 7/8	13280	80	10	straight	5111187100	514674	125 x 22,23	5 x 7/8	12200	40	10	straight	5112184100	524642	125 x 22,23	5 x 7/8	12200	60	10	straight	5112186100	524666	125 x 22,23	5 x 7/8	12200	80	10	straight	5112187100	524673
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	CONTENT PC	SHAPE	ITEM-CODE	BAR CODE 4081600																																																				
115 x 22,23	4 1/2 x 7/8	13280	40	10	straight	5111184100	514643																																																				
115 x 22,23	4 1/2 x 7/8	13280	60	10	straight	5111186100	514667																																																				
115 x 22,23	4 1/2 x 7/8	13280	80	10	straight	5111187100	514674																																																				
125 x 22,23	5 x 7/8	12200	40	10	straight	5112184100	524642																																																				
125 x 22,23	5 x 7/8	12200	60	10	straight	5112186100	524666																																																				
125 x 22,23	5 x 7/8	12200	80	10	straight	5112187100	524673																																																				




J-AZ A

special

Zirconium corundum

★★★☆

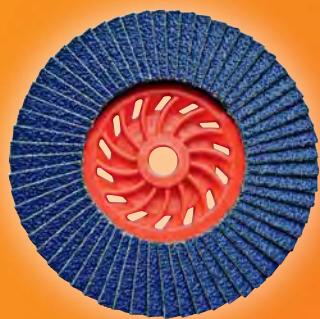

Top flap disc with glass fibre reinforced plastic backing.
Equipped with zirconium abrasive on a cotton-polyester cloth. High stock removal and service life.

Packing unit: 10 pcs.

| For steel and stainless steel.

- Quick to mount thanks to the integrated M 14 adaptor
- Air-cooled with cooling slots integrated in the backing
- Reinforced glass fibre plastic backing



JETzirkon

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	CONTENT PC	SHAPE	ITEM-CODE	BAR CODE 4081600
115 x M14	4 1/2 x M14	13280	40	10	straight	5111154100	515206
115 x M14	4 1/2 x M14	13280	60	10	straight	5111156100	515213
115 x M14	4 1/2 x M14	13280	80	10	straight	5111157100	515220
115 x M14	4 1/2 x M14	13280	120	10	straight	5111159100	515237
125 x M14	5 x M14	12200	40	10	straight	5112154100	525205
125 x M14	5 x M14	12200	60	10	straight	5112156100	525212
125 x M14	5 x M14	12200	80	10	straight	5112157100	525229
125 x M14	5 x M14	12200	120	10	straight	5112159100	525236

G-AZ	special	Zirconium corundum	★★★★★																																																																																																																																																			
		<p>This abrasive grain is less hard, but very tough, and gives the disc very good all purpose characteristics. It is used for such demanding operations as deburring, machining welding seams and breaking edges. The glass fibre backing is characterised by an even grinding finish until all of the abrasive grain has been worn away. Leaves no scratches on the workpiece.</p> <p>Packing unit: 10 pcs.</p>	<p> Stainless steel, steel, cast, etc.</p>																																																																																																																																																			
<ul style="list-style-type: none"> ► Ideal for working on edges of mild or stainless steel. ► Brilliant grinding capacity with outstanding service life. 																																																																																																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">DIMENSION MM</th><th style="text-align: left;">DIMENSION INCH</th><th style="text-align: left;">SPEED R.P.M.</th><th style="text-align: left;">GRIT SIZE</th><th style="text-align: left;">SHAPE</th><th style="text-align: left;">ITEM- CODE</th><th style="text-align: left;">BAR CODE</th></tr> </thead> <tbody> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>40</td><td>straight</td><td>521104100</td><td>511505</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>60</td><td>straight</td><td>521106100</td><td>511512</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>80</td><td>straight</td><td>521107100</td><td>511529</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>120</td><td>straight</td><td>521109100</td><td>511543</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>40</td><td>tapered</td><td>5211304100</td><td>511109</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>60</td><td>tapered</td><td>5211306100</td><td>511116</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>80</td><td>tapered</td><td>5211307100</td><td>511123</td></tr> <tr><td>115 x 22,23</td><td>4 1/2 x 7/8</td><td>13280</td><td>120</td><td>tapered</td><td>5211309100</td><td>511147</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>40</td><td>straight</td><td>5212104100</td><td>521504</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>60</td><td>straight</td><td>5212106100</td><td>521511</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>80</td><td>straight</td><td>5212107100</td><td>521528</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>120</td><td>straight</td><td>5212109100</td><td>521542</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>40</td><td>tapered</td><td>5212304100</td><td>521207</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>60</td><td>tapered</td><td>5212306100</td><td>521214</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>80</td><td>tapered</td><td>5212307100</td><td>521221</td></tr> <tr><td>125 x 22,23</td><td>5 x 7/8</td><td>12200</td><td>120</td><td>tapered</td><td>5212309100</td><td>541052</td></tr> <tr><td>180 x 22,23</td><td>7 x 7/8</td><td>8600</td><td>40</td><td>straight</td><td>5218104100</td><td>541502</td></tr> <tr><td>180 x 22,23</td><td>7 x 7/8</td><td>8600</td><td>60</td><td>straight</td><td>5218106100</td><td>541519</td></tr> <tr><td>180 x 22,23</td><td>7 x 7/8</td><td>8600</td><td>40</td><td>tapered</td><td>5218304100</td><td>541014</td></tr> <tr><td>180 x 22,23</td><td>7 x 7/8</td><td>8600</td><td>60</td><td>tapered</td><td>5218306100</td><td>541021</td></tr> </tbody> </table>				DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	SHAPE	ITEM- CODE	BAR CODE	115 x 22,23	4 1/2 x 7/8	13280	40	straight	521104100	511505	115 x 22,23	4 1/2 x 7/8	13280	60	straight	521106100	511512	115 x 22,23	4 1/2 x 7/8	13280	80	straight	521107100	511529	115 x 22,23	4 1/2 x 7/8	13280	120	straight	521109100	511543	115 x 22,23	4 1/2 x 7/8	13280	40	tapered	5211304100	511109	115 x 22,23	4 1/2 x 7/8	13280	60	tapered	5211306100	511116	115 x 22,23	4 1/2 x 7/8	13280	80	tapered	5211307100	511123	115 x 22,23	4 1/2 x 7/8	13280	120	tapered	5211309100	511147	125 x 22,23	5 x 7/8	12200	40	straight	5212104100	521504	125 x 22,23	5 x 7/8	12200	60	straight	5212106100	521511	125 x 22,23	5 x 7/8	12200	80	straight	5212107100	521528	125 x 22,23	5 x 7/8	12200	120	straight	5212109100	521542	125 x 22,23	5 x 7/8	12200	40	tapered	5212304100	521207	125 x 22,23	5 x 7/8	12200	60	tapered	5212306100	521214	125 x 22,23	5 x 7/8	12200	80	tapered	5212307100	521221	125 x 22,23	5 x 7/8	12200	120	tapered	5212309100	541052	180 x 22,23	7 x 7/8	8600	40	straight	5218104100	541502	180 x 22,23	7 x 7/8	8600	60	straight	5218106100	541519	180 x 22,23	7 x 7/8	8600	40	tapered	5218304100	541014	180 x 22,23	7 x 7/8	8600	60	tapered	5218306100	541021
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	SHAPE	ITEM- CODE	BAR CODE																																																																																																																																																
115 x 22,23	4 1/2 x 7/8	13280	40	straight	521104100	511505																																																																																																																																																
115 x 22,23	4 1/2 x 7/8	13280	60	straight	521106100	511512																																																																																																																																																
115 x 22,23	4 1/2 x 7/8	13280	80	straight	521107100	511529																																																																																																																																																
115 x 22,23	4 1/2 x 7/8	13280	120	straight	521109100	511543																																																																																																																																																
115 x 22,23	4 1/2 x 7/8	13280	40	tapered	5211304100	511109																																																																																																																																																
115 x 22,23	4 1/2 x 7/8	13280	60	tapered	5211306100	511116																																																																																																																																																
115 x 22,23	4 1/2 x 7/8	13280	80	tapered	5211307100	511123																																																																																																																																																
115 x 22,23	4 1/2 x 7/8	13280	120	tapered	5211309100	511147																																																																																																																																																
125 x 22,23	5 x 7/8	12200	40	straight	5212104100	521504																																																																																																																																																
125 x 22,23	5 x 7/8	12200	60	straight	5212106100	521511																																																																																																																																																
125 x 22,23	5 x 7/8	12200	80	straight	5212107100	521528																																																																																																																																																
125 x 22,23	5 x 7/8	12200	120	straight	5212109100	521542																																																																																																																																																
125 x 22,23	5 x 7/8	12200	40	tapered	5212304100	521207																																																																																																																																																
125 x 22,23	5 x 7/8	12200	60	tapered	5212306100	521214																																																																																																																																																
125 x 22,23	5 x 7/8	12200	80	tapered	5212307100	521221																																																																																																																																																
125 x 22,23	5 x 7/8	12200	120	tapered	5212309100	541052																																																																																																																																																
180 x 22,23	7 x 7/8	8600	40	straight	5218104100	541502																																																																																																																																																
180 x 22,23	7 x 7/8	8600	60	straight	5218106100	541519																																																																																																																																																
180 x 22,23	7 x 7/8	8600	40	tapered	5218304100	541014																																																																																																																																																
180 x 22,23	7 x 7/8	8600	60	tapered	5218306100	541021																																																																																																																																																



G-AZ MAXX

evolution

Zirconium corundum

★★★★



The G-AZ MAXX flap disc is a high-end product for all users who recognise quality. Its increased number of lamellas ensures an even more aggressive material removal rate (steeper arrangement of lamellas) and a much higher lifetime than the AZ type. Improved tried-and-trusted topquality to optimize the efficiency of your tool. G-AZ MAXX means: Less downtime, more efficient working. Packing unit: 10 pcs.

- Increased number of lamellas for MAXXimum removal rate.
- Distinctly increased lifetime compared to G-AZ.
- Optimise the efficiency of your tool.

For mild steel and stainless steel. For grinding on edges as well as surfaces. Ideal for sheet metal working, tank construction, metal construction.

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	SHAPE	ITEM- CODE	BAR CODE 4081600
115x22,23	4 1/2 x 7/8	13.280	40	straight	5211134100	512557
115x22,23	4 1/2 x 7/8	13.280	60	straight	5211136100	512564
115x22,23	4 1/2 x 7/8	13.280	80	straight	5211137100	512571
115x22,23	4 1/2 x 7/8	13.280	40	tapered	5211294100	513257
115x22,23	4 1/2 x 7/8	13.280	60	tapered	5211296100	513264
115x22,23	4 1/2 x 7/8	13.280	80	tapered	5211297100	513271
125x22,23	5 x 7/8	12.200	40	straight	5212134100	521757
125x22,23	5 x 7/8	12.200	60	straight	5212136100	521764
125x22,23	5 x 7/8	12.200	80	straight	5212137100	521771
125x22,23	5 x 7/8	12.200	40	tapered	5212294100	522259
125x22,23	5 x 7/8	12.200	60	tapered	5212296100	522266
125x22,23	5 x 7/8	12.200	80	tapered	5212297100	522273

▼ Flap discs ceramic grain

G-AK	evolution	Ceramic grain	★★★★
	<p>An innovative new flap disc with self-sharpening ceramic grain, which guarantees a permanent and extremely high stock removal as well as a long service life. The ceramic grain on this innovative abrasive cloth is fixed on a robust polyester backing. Fully resinoid bonded with fillers for active grind support guarantees the abrasion resistance of the ceramic grain especially under high pressure. Outstanding results when grinding on surfaces as well as on edges on mild steel or stainless steel. Due to the high load capacity ideally suitable for extreme grinding applications or special tasks for steel, stainless steel, titanium-base alloy, nickel-based superalloy, chrome-steel and chromium-nickel steel, brass and bronze.</p> <p>Packing unit: 10 pcs.</p> <p>3 times better than zirconium:</p> <ul style="list-style-type: none"> ● Improved stock removal and effortless working ● Increased economic efficiency by noticeable time saving ● Improved service life ● Optimum Strength ● Self-sharpening ● Cool grinding on surfaces and edges 	<p>Sheet metal working, tank construction, cast iron, pipes and bars, metal constructions. Ideally suitable for steel, stainless steel, titanium-base alloy, nickel-based superalloy, chromesteel and chromium-nickel steel, brass and bronze.</p>	 




J-AK

evolution

Ceramic grain

★★★★

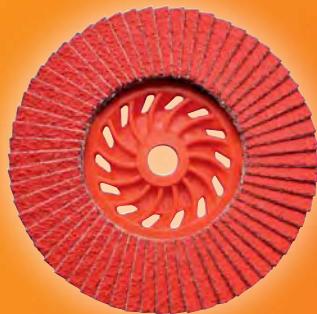**JETceramic**

High-End Product: Flap disc with glass fibre reinforced plastic backing. Ceramic grain abrasive on polyester cloth. Fully resinoid bonded with fillers for active grind support. Self-sharpening ceramic grain for extremely high, permanently available stock removal as well as a long service life.

Packing unit: 10 pcs.

- ◆ Quick to mount thanks to the integrated M 14 adaptor
- ◆ Air-cooled with cooling slots integrated in the backing
- ◆ Reinforced glass fibre plastic backing

For the processing of steel and stainless steel, high-alloy steels, chrome and chrome nickel steel, titanium alloys, brass and bronze.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	CONTENT PC	SHAPE	ITEM-CODE	BAR CODE 4081600
115 x M14	4 1/2 x M14	13280	40	10	straight	5111424100	515305
115 x M14	4 1/2 x M14	13280	60	10	straight	5111426100	515312
115 x M14	4 1/2 x M14	13280	80	10	straight	5111427100	515329
125 x M14	5 x M14	12200	40	10	straight	5112424100	525304
125 x M14	5 x M14	12200	60	10	straight	5112426100	525311
125 x M14	5 x M14	12200	80	10	straight	5112427100	525328

▼ Flap discs silicon carbide

G-C	perfect	Silicon carbide	★★☆☆			
	 <p>Flap disc equipped with silicon carbide abrasive on a glass fibre backing. Good removal rate on various materials. Packing unit: 10 pcs.</p> <ul style="list-style-type: none"> ● Problem solver for working on aluminium and stone ● Good removal rate at universal use 		<p>For working on concrete, stone, tiles, ceramics, non-ferrous metals (aluminium, brass, copper), cast, plastics and fillers. Can be used for claw treatment as well.</p>			
<hr/>						
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	GRIT SIZE	SHAPE	ITEM-CODE	BAR CODE 4081600
115 x 22,23	4 1/2 x 7/8	13280	40	tapered	5211404100	512045
115 x 22,23	4 1/2 x 7/8	13280	60	tapered	5211406100	512069
115 x 22,23	4 1/2 x 7/8	13280	80	tapered	5211407100	512076
125 x 22,23	5 x 7/8	12200	40	tapered	5212404100	522204
125 x 22,23	5 x 7/8	12200	60	tapered	5212406100	522211
125 x 22,23	5 x 7/8	12200	80	tapered	5212407100	522228

CLEANING- AND POLISHING TOOLS



CLEANING- AND
POLISHING TOOLS

With the right material to highest perfection. The DRONCO POLISHING FLAP DISC.

The DRONCO polishing flap disc delivers outstanding results through an innovative, highly effective grinding fleece arranged in a fan-shaped lamella structure. Especially adjusted for working on stainless steel, steel, aluminium, and non-ferrous metals.

Depending on the texture of the fleece, DRONCO polishing flap discs are perfectly suitable for

- ▷ **Descaling and derusting work-pieces**
- ▷ **Preparing and repolishing welding seams**
- ▷ **Preparing surfaces for varnishing**
- ▷ **Polishing stainless steel**
- ▷ **Surface processing**



Available in three textures in dimensions of 115mm and 125mm.

- **Highly effective for the use in welding technology and metalworking**
Optimum results e.g. during the preparation of welding seems, the finishing of welding seams and removal of welding spillage in accordance with EN ISO 5817. Removes oxide film/annealing colours after welding of pipes, containers and apparatus or after the plasma-arc cutting of stainless steel sheet metals in accordance with DIN 50930, DIN 25410, DVGW W541.
- **Highly effective for the use in painting technology**
Perfect to derust, removal of colours and prepare of painting surfaces.
- **Versatile usage**
Cleaning and polishing of unalloyed steel, high alloyed steel, aluminium and non-ferrous metal. Suitable for grinding on edges and surfaces.
- **High service life**

CLEANING- AND POLISHING TOOLS



Polishing flap disc for angle-grinders

★★★☆



Outstanding for descaling and derusting of stainless steel, steel, aluminium and non-ferrous metal.
Preparation and finishing of welding seams.
Preparing of painted surfaces, polishing of stainless steel.
Packing unit: 10 pcs.

Polishing flap disc for the efficient processing of metals.

DESCRIPTION	DIMENSION MM	DIMENSION INCH	CONTENT PC.	ITEM CODE	BAR CODE 4081600
G-VA Coarse	115 x 22,23	4 1/2 x 7/8	coarse	5511204100	550047
G-VA Medium	115 x 22,23	4 1/2 x 7/8	medium	5511206100	550061
G-VA Fine	115 x 22,23	4 1/2 x 7/8	fine	5511207100	550078
G-VA Coarse	125 x 22,23	5 x 7/8	coarse	5512204100	551044
G-VA Medium	125 x 22,23	5 x 7/8	medium	5512206100	551068
G-VA Fine	125 x 22,23	5 x 7/8	fine	5512207100	551075

Polishing flap disc set including 54 pc. in our special offer box

★★★☆



The innovative polishing flap discs in the attractive, self-explanatory special offer box. Contains 54 pc. with diameters of 115mm or 125mm. Optional also as mixed box including:
3 x 9 pc. 115mm (coarse, medium, fine) and
3 x 9 pc. 125mm (coarse, medium, fine)

Definitely a sales success - in the product shelf or on your sales counter.

DESCRIPTION	DIMENSION MM	DIMENSION INCH	CONTENT PC.	ITEM CODE	BAR CODE 4081600
Mixed box	115 / 125 mm	4 1/2 / 5	54	6900055100	700008

The innovation for polishing and cleaning The DRONCO POLISHING FLAP DISC



Grinding thin welding seams and removing thermal bluing



Professional derusting and descaling



Descaled surfaces prior to welding lead to clean welding seams


A multi-talented performer for corners and angles



- ▶ the soft fleece hugs the surface of the workpiece to perfection
- ▶ flexible application for corners, angles, U-profiles, on rounded or flat surfaces
- ▶ fast and simple removal of rust, cleaning and blank polishing of metals
- ▶ cleaning, smoothing and polishing welded seams for corners, angles and fillet welds
- ▶ removal of temper colour, oxide layers or thin layers of paint on metals
- ▶ suitable for stainless steel, steel, aluminium and nonferrous metals

The new polishing wheel gives a perfect shine to corners, angles, rounded and flat surfaces.

It combines the outstanding performance of the polishing flap disc with an added bonus. The new polishing wheel is ideal for cleaning difficult-to-reach areas effectively and polishing them to a fine finish.

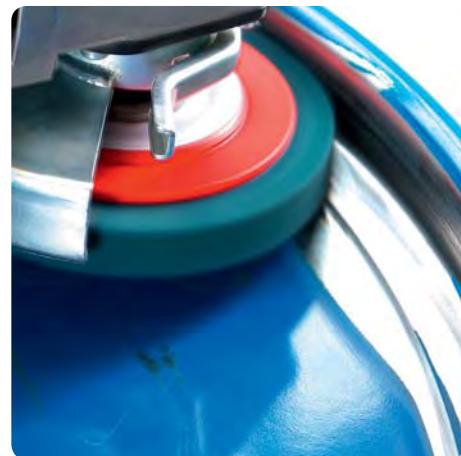

CLEANING- AND POLISHING TOOLS



Polishing wheel in an individual promotional pack

★★★★



Polishing wheel with upright flaps made from high performance non woven material with a reinforced plastic backing. This flexible material hugs the work piece to perfection. It can be used both on the edge in corners, angles and rounded edges as well as on its face for flat surfaces. Suitable for the removal of rust, cleaning and blank polishing of work pieces made from stainless steel, steel, aluminium and non-ferrous metals. Cleaning and polishing of welding seams in corners, angles or fillet welds. Removal of any discoloration, oxide layers and thin layers of paint.

DESCRIPTION	DIMENSION MM	DIMENSION INCH	STRUCTURE	CONTENT PC.	ITEM CODE	BAR CODE 4081600
P-WA Fine	115 x 22,23	4 1/2 x 7/8	fine	1	5511307102	700039
P-WA Medium	115 x 22,23	4 1/2 x 7/8	medium	1	5511306102	700046
P-WA Fine	125 x 22,23	5 x 7/8	fine	1	5512307102	700022
P-WA Medium	125 x 22,23	5 x 7/8	medium	1	5512306102	700015

Polishing wheel in Packing unit with 10 pc.

★★★★

Our polishing wheel in practical box with 10 pc.



DESCRIPTION	DIMENSION MM	DIMENSION INCH	STRUCTURE	CONTENT PC.	ITEM CODE	BAR CODE 4081600
P-WA Fine	115 x 22,23	4 1/2 x 7/8	fine	10	5511307100	550207
P-WA Medium	115 x 22,23	4 1/2 x 7/8	medium	10	5511306100	550214
P-WA Fine	125 x 22,23	5 x 7/8	fine	10	5512307100	552072
P-WA Medium	125 x 22,23	5 x 7/8	medium	10	5512306100	552096

▼ Gloss polishing flap discs

Gloss Polishing flap disc for angle-grinders



The G-VA finish completes the programme of the DRONCO Polishing flap discs. The disc is equipped with flaps made of high-quality special felt and is generally used with polishing compounds. This gives the work piece a mirror finish.

Packing unit: 1 pc. or 10 pcs.

For polishing metals using polishing compounds.



DESCRIPTION	DIMENSION MM	DIMENSION INCH	STRUCTURE	CONTENT PC.	ITEM CODE	BAR CODE 4081600
G-VA Finish	115 x 22,23	4 1/2 x 7/8	felt	1 in Blister pack	5511221100	553123
G-VA Finish	125 x 22,23	5 x 7/8	felt	1 in Blister pack	5512221100	553130
Also available 10 pcs in Carton box						
G-VA Finish	115 x 22,23	4 1/2 x 7/8	felt	10	5511220100	553109
G-VA Finish	125 x 22,23	5 x 7/8	felt	10	5512220100	553116
Polishing set, 5-part for the processing of stainless steel	Blister pack, content: 1 x Polishing Flap Disc G-VA coarse. 1 x Polishing Flap Disc G-VA fine 1 x Gloss Polishing Flap Disc G-VA finish. 1 x Polishing compound blue, 110g, 1x Polishing compound white 110g					
G-VA Finish-Set	115 x 22,23	4 1/2 x 7/8	mixed	1 Set in Blister pack	6900040100	706208
G-VA Finish-Set	125 x 22,23	5 x 7/8	mixed	1 Set in Blister pack	6900041100	706215

Polishing compound, single, 110 Gram



Polishing compound white = pre-polishing steel and stainless steel.

Polishing compound brown = pre-polishing of non-ferrous metals

Polishing compound blue = gloss-polishing.

DESCRIPTION	DIMENSION GRAM	CONTENT PC.	ITEM CODE	BAR CODE 4081600
Polishing compound white	110	1	6400403000	707328
Polishing compound brown	110	1	6400402000	707311
Polishing compound blue	110	1	6400404000	707304

Recommended use:

- To start, process the work piece with the coarse G-VA Polishing flap disc followed by fine.
- The Gloss Polishing flap disc is always used with a corresponding polishing compound.
- Step 1: Start with a white or brown pre-polishing compound.
- Step 2: Use a new Polishing flap disc with a blue high-gloss polishing compound in order to obtain a high-gloss surface.
- For the polishing of aluminium and non-ferrous metals, use a brown polishing compound especially for these materials.
- With a reduced working speed of 4.500 rpm, better polishing results are achieved than with the angle grinder at full speed.

CLEANING- AND POLISHING TOOLS



Brilliant results in 3 steps
with our 10 pcs. Professional Polishing System

1

Pre-Polishing with Sisal cloth and polishing compound:

- ▷ white for stainless steel
- ▷ brown for non-ferrous metals
- ▷ most important step after grinding
- ▷ high stock removal



2

Polish with Notiflex® 914 in conjunction with polishing compound:

- ▷ white for stainless steel
- ▷ brown for non-ferrous metals
- ▷ hard cloth
- ▷ even surface



3

Mirror-finishing with Notiflex® 925 in conjunction with blue polishing compound

- ▷ short process time
- ▷ light contact pressure



Polishing System, 10 pcs.



For use on drilling machines, flexible shafts, angle polishers and stationary polishing stands for ultimate polishing in 3 steps.

Content of package:

- 6 Cloth discs: 2 x Sisal cloth, 2 x Notiflex® 914, 2 x Notiflex® 925
- 3 x polishing compound (white, brown, blue)
- 1 x drive arbor

Processing on pots, processing on mountings, automotive industry, builder's hardware

DESCRIPTION	DIMENSION MM	SPEED R.P.M.	ITEM- CODE	BAR CODE 4081600
Polishing System	100 mm	4000	6900003100	700688

PLEASE OBSERVE

Notiflex®: High quality randomly-placed fibre.

Advantages: no seams, little heating, 30 % less polishing compound use in relation to commercial polishing buffs. Not suitable for work on edges!

▼ Coarse cleaning fleeces

Dronco cleaning fleeces produce optimum results when used to grind and rub down metal, stainless steel, wood or plastic surfaces and can be used as a preliminary stage before polishing. They are made of intertwined nylon fibres which are then immersed in synthetic resin and gently hardened. They are available with a glass fibre backing or for the use with straight or cylindrical grinders.

Coarse cleaning fleeces for the use on angle-grinders



Suitable for cleaning and polishing all surfaces.

Packing Unit: 10 pc.

Removal of old paint, rust and welding splatter without scratching the surface of the work-piece, cleaning and smoothing wood and plastic, polishing of stainless steel and removal of thermal bluing.

DESCRIPTION	DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	CONTENT PC.	ITEM CODE	BAR CODE 4081600
Cleaning fleece	115 x 22,23	4 1/2 x 7/8	11000	10	6700001100	670059
Cleaning fleece	125 x 22,23	5 x 7/8	10000	10	6700002100	670103
Cleaning fleece	180 x 22,23	7 x 7/8	8500	10	6700003100	670158

Coarse cleaning fleece set including 36 pc. in our special offer box



Our coarse cleaning fleece in the attractive, self-explanatory special offer box. Mixed box contains 18 pc. 115mm, and 18 pc. 125mm with fibre backing.

Definitely a sales success - in the product shelfe or on your sales counter.

DESCRIPTION	DIMENSION MM	DIMENSION INCH	CONTENT PC.	ITEM CODE	BAR CODE 4081600
Mixed box	115 / 125 x 22,23	4 1/2 / 5 x 7/8	2 x 18	6700012100	683349

PLEASE NOTE

This product is also suitable for battery-powered angle grinders in diameters 115 and 125 mm.




CLEANING- AND POLISHING TOOLS



PLEASE OBSERVE

Coarse cleaning fleeces are designed to be used flat - they are not suitable for grinding or cutting.

Coarse cleaning fleeces for straight and cylindrical grinders

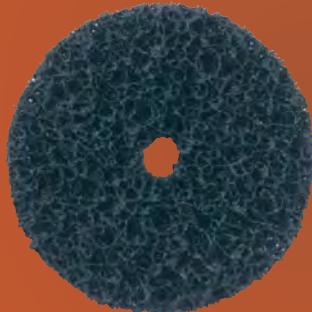

Suitable for cleaning and polishing all surfaces. The use on straight or cylindrical grinders happens with a tensioning shaft.

Removal of old paint, rust and welding splatter without scratching the surface of the work-piece, cleaning and smoothing wood and plastic, polishing of stainless steel and removal of thermal bluing.

DESCRIPTION	DIMENSION MM	DIMENSION INCH	CONTENT PC.	ITEM CODE	BAR CODE 4081600
Cleaning fleece	100 mm	4	10	6700006000	670301
Cleaning fleece	150 mm	6	10	6700007000	670356

Tensioning shaft



The tensioning shaft enables the use of cleaning fleeces on straight or cylindrical grinders.


DESCRIPTION	DIMENSION MM	DIMENSION INCH	CONTENT PC.	ITEM CODE	BAR CODE 4081600
Tensioning shaft	6 mm		1	6700008100	670400

More grinding luxury for your customers The coarse cleaning fleece with best results during test



For better depiction, the guard of the angle-grinder was removed for picture taking.

Please make sure to use the coarse cleaning fleece on your angle-grinder with appropriate safety precautions only.

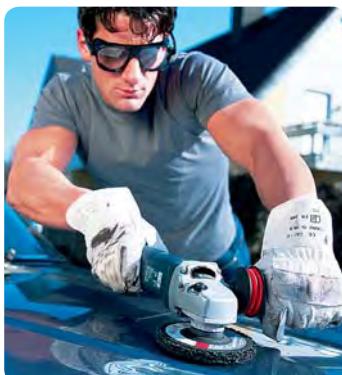

The Label - briefly explained

The label of the diamond blade contains all important information about the product.

① Description

Consists of the purpose and performance class (3 / 4 / 5 / 7): e.g. U5

- U – Universal
- S – Stone Plates
- F – Tiles or Stoneware
- B – Concrete
- G – Granite and Hard Stones
- A – Abrasive Stones and Asphalt
- AM – Mortar Raking

② Product Lines

perfect | superior | evolution | xtreme

More details on page 91.

③ Safety Standards

Our products comply with the highest standards and regulations:

EN 13 236 – diamond tools

OSA – The Organization for the Safety of Abrasives

④ Dimensions

Consist of [diameter of the blade]

x [thickness of the segments]

x [bore size].

Dimensions given in mm.

⑤ max. RPM

Indicates the permitted maximum speed.

In this example 6600 rpm.

⑥ Directional Arrow

Indicates the direction of rotation of the blade.

⑦ Red Bar

Indicates 80 m/s as permitted peripheral speed.

Green Bar

Indicates 100 m/s as permitted peripheral speed.

⑧ Safety Information

For your own safety. Please observe!

⑨ www.dronco.com

24 hour service on our website –

we are always there when you need us!



DIAMOND CUTTING DISCS




THE RIGHT TOOL
FOR EVERY TASK



Many years of experience for best quality

Diamond tools have been part of our range for more than 30 years. During this period an in-depth knowledge has been achieved, which our customers benefit from.

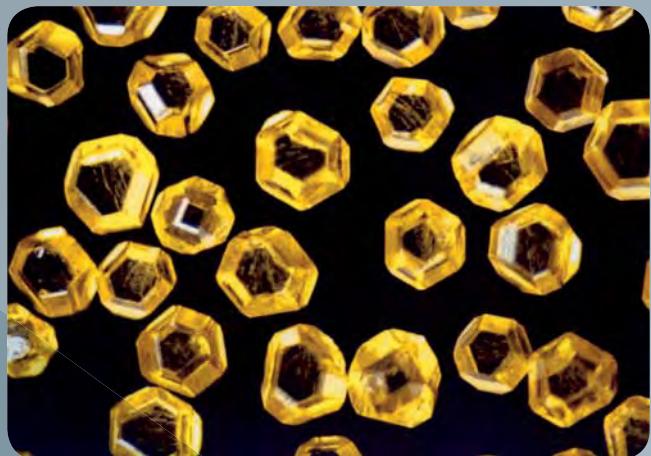

Innovation

Always one step ahead

Our R+D team is working in modern laboratories on future-oriented technologies for abrasive tools, resulting in product innovations and a continuous improvement of existing products with regard to cutting ability, lifetime, speed and precision. As a result, significant performance improvements of more than 30 % in the sector of diamond tools have been achieved in the past few years.

Diamonds

DRONCO relies on synthetic diamonds

The diamonds are responsible for the actual cutting work of the tool. DRONCO uses synthetic diamonds which have the same degree of hardness as natural diamonds. In comparison to their natural counterparts, they offer the advantage of an ideal structure that always remains the same. Both grain size and the crystalline shape of the diamonds are adjusted to the optimum parameters for the respective field of application in order to achieve perfect cutting abilities and a high lifetime.



Highest Safety Standards

In terms of safety and quality, DRONCO diamond cutting blades are manufactured and tested according to the latest standards, regulations and norms. Our quality management system ensures that we meet the high demands of a modern, worldwide acting industrial enterprise on all levels. Certification in accordance to DIN EN ISO 9001:2008 is therefore just as normal as our oSa membership (Organization for the Safety of Abrasives).

Tested Safety According to EN 13 236 and oSa

EN 13 236

European safety standard for diamond tools

oSa

The Organization for the Safety of Abrasives



OUR PRODUCTS SAFETY FIRST!

Being a member of oSa, we do everything to make our abrasive tools as secure as possible.

Core Geometry

Introducing the various core shapes used for our diamond cutting blades.




Standard Segmentation (C3)

- narrow gullet
- small slots with slot holes



Continuous Rim (GRF)

- stable running
- cutting edges without chipping

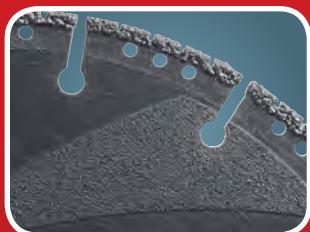

Standard Segmentation Diamond Brazed

- small slots with slot holes
- segments directly coated with diamonds in a vacuum-process
- good discharge of material



Continuous Turbo Rim

- stable running
- clean cut without chipping



Turbo Segmentation (C3)

- small slots with slot holes
- aggressive fast cut
- higher lifetime



Wide Segmentation (C1)

- normal gullet
- wide slots
- good discharge of material



Speed Segmentation (C3)

- narrow gullet
- small slots with slot holes
- aggressive fast cut
- outstanding lifetime, no cooling breaks
- suitable for cutting metal



Wide Segmentation with Core Guard Segments (C1S)

- normal gullet
- wide slots
- good discharge of material
- core guard segments to protect the core as well as to prevent undercutting

VIBRATION AND NOISE CAN BE REDUCED EFFECTIVELY

Our "Protect" blades are using special sandwich steel cores which are reducing vibration and noise noticeably during the cutting operations.



DIAMOND CUTTING DISCS




Diamond Segment

The ideal material for all fields of application

The bond of the individual segments is the carrier of the synthetic diamonds. The high-tech bonds are specifically adapted to their respective field of application in order to ensure both the best results possible and the optimum wear of the bonds. The cutting ability and the lifetime of a blade do not depend on the highest concentration, but rather on the proper amount of diamonds and the composition of the bond:

Hard Material → Soft Bond

Soft Material → Hard Bond

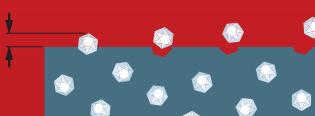

Poor - excessive wear of the bond

The diamond grain separates prematurely, resulting in a shortened lifetime.



Poor - insufficient wear of the bond

The diamond grain is polished or broken off on the bond level. New diamonds cannot be released and the blade loses its cutting ability.



Perfect - optimum wear of the bond

The diamond grain is evenly released. The blade maintains its cutting ability and achieves an ideal lifetime. The trail of the bond perfectly supports the diamond grain and ensures an optimum cutting ability.

Steel Core

Made of hardened and balanced tool steel

Segment Bond

Joins the steel core and the segment

There are two methods for permanently joining the diamond segments and the steel core:

Laser welding

This method is characterized by the fact that the diamond segments are permanently welded to the high-quality steel core. As segment losses can almost be completely excluded, this method ensures the best operational safety possible.

Sintering

During this process, the segments are sintered to the steel core by applying high pressure and temperature.



DRY CUTTING BLADES

DRONCO diamond cutting blades for dry cutting can be used for wet cutting as well without any concern.



WET CUTTING BLADES

DRONCO diamond cutting blades for wet cutting may only be used on water-cooled machines!

Strong content - Strong outfit

We think a top product needs an appealing packaging. That's why DRONCO does not use a random solution, but a carefully thought out, eye-catching outfit to inform and convince our customers visually and haptically.

The outstanding product quality and high-class brand image will help to showcase you as a distributor as well. Our self-explanatory packaging facilitates the consulting of your customers and therefore improves the sales.



DIAMOND CUTTING DISCS



Our Product lines - For all demands

Three quality lines based on the good-better-best-principle: From the solid craftsmen quality, which is used by semi-professionals as well, to the absolute high-end tools for the intensive use on construction sites; DRONCO has the right tool for all demands.



BEST



★ ★ ★ ★ ★

★ ★ ★ ★ ★ ★ ★

High performance diamond cutting blades for the professional user to meet high expectation on demanding application. Maximum cutting speed and outstanding lifetime. Wide range of application. The Evolution and Xtreme line can be recognized by their gold labels and 5 or 7 stars.



BETTER



★ ★ ★ ★ ☆

Premium tools for the professional user. Effective, durable and economical. Convincing in daily use thanks to their fast cutting speed and good lifetime. Outstanding price-performance ratio. The Superior line can be recognized by its blue label and 4 stars.



GOOD



★ ★ ★ ☆ ☆

The economically priced assortment for many different tasks in approved craftsmen quality. Good lifetime and fast cutting speed at an attractive price. For users who place the emphasis on quality but don't need a high-performance tool for continuous use. The Perfect line can be recognized by its silver label and 3 stars.

The right cutting blade found instantly

Our colour coding system on the packaging of the diamond cutting blades features six distinctive colours, each for a different field of application. Additionally the materials which the blades are suitable for are illustrated on the carton sleeves. Thanks to the detailed application chart, you can easily determine which diamond cutting blade is the best choice for your field of application.

COLOUR CODING SYSTEM:

Universal

Yellow



Concrete

Green



Tiles/Stoneware

Turquoise



DO YOU NORMALLY CUT THE SAME OR DIFFERENT TYPES OF MATERIAL?

Same material

We recommend using the following blades:

A4, B4, B5 and G4

Different materials

For applications with a wide range of materials we recommend using the following blades:

U3, U4, U4 speed, U4 protect, DB4, U5 speed, U5 protect and U7 speed



Stone Plates

Orange



Granite and Hard Stones

Navy Blue



Abrasive Stones and Asphalt

Red



WHEN SHOULD YOU USE A BLADE WITH A CONTINUOUS RIM?

If you want to cut materials where a clean cut is required (e.g. tiles, glazed bricks, stoneware), we recommend you to use one of the following blades:
S3 turbo, S5 turbo, S5 turbo protect, F3, F4 cera and F5 cera speed

The continuous rim prevents the edges from chipping, guaranteeing a brilliant cutting result. Blades with a continuous rim should only be used up to a cutting depth of 2 cm when cutting dry.



Application chart of diamond cutting blades

	PAGE	Asphalt	Basalt	Reinforced wire mesh	Concrete	Concrete, reinforced	Concrete roofing tiles	Composite concrete paving	Cotto plates	Ductile and Cast pipes	Skreed, floor pavement, plaster	Eternit	Fine stoneware, Quarry tiles	Refractory stones	Tiles	Green concrete
UNIVERSAL / CONSTRUCTION SITE MATERIALS																
ST-7	QUALITY	96			●		●									
U3	PERFECT	96			●		●									
U4	SUPERIOR	97	●		●●	●	●	●	●	●	●	●	●●			
U4 SPEED	SUPERIOR	97	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●			
DB4	SUPERIOR	98	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●			
U4 PROTECT	SUPERIOR	98	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●			
U5 SPEED	EVOLUTION	99	●	●●	●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●		
U5 PROTECT	EVOLUTION	100	●	●●	●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●		
U7 SPEED	XTREME	101	●	●●	●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●		
STONE PLATES / ROOF TILES																
S3 TURBO	PERFECT	102			●		●●		●			●			●●	●●
S5 TURBO PROTECT	EVOLUTION	102			●●		●●●		●●●				●●	●●	●●	●●
S5 TURBO	EVOLUTION	103			●●		●●●		●●●				●●	●●	●●	●●
TILES / STONEWARE																
F3	PERFECT	103							●						●●	●●
F4 CERA	SUPERIOR	104			●		●		●●●				●●●	●●●	●●●	●●●
F5 CERA SPEED	SUPERIOR	105			●		●		●●●				●●●	●●●	●●●	●●●
CONCRETE																
B4	SUPERIOR	106			●●	●●	●●	●●	●		●	●●				
B5	EVOLUTION	107	●	●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	
GRANITE / HARD STONES																
G4	SUPERIOR	108		●●●	●		●		●●				●●			
ABRASIVE STONES / ASPHALT																
A4	SUPERIOR	108	●●●					●				●●●	●●●	●●●	●●●	●●●
A4 ASPHALT	SUPERIOR	109	●●●					●				●●●	●●●	●●●	●●●	●●●
A4 M	SUPERIOR	109			●							●●●	●●●			

In the application chart you will find the diamond blades pre-sorted according the field of application.
You can see which disc is most suitable for different material.

On which type of machine can the blades be used?

These information can also be found in the descriptions of each type on the following pages.

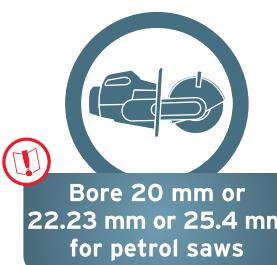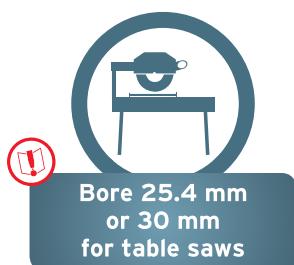

DIAMOND CUTTING DISCS



Application chart of diamond cutting blades

	Porous concrete	Gneiss	Granite	Cast up to 5 mm	Sand-lime stone	Limestone	Clinker, Engineering bricks	Marble	Paver	Porphyry	Sandstone	Slate	Steel up to 3,5 mm	Terrazzo	Exposed aggregate concrete	Bricks
◆ UNIVERSAL / CONSTRUCTION SITE MATERIALS																
ST-7	QUALITY	●			●	●					●					●
U3	PERFECT	●			●	●					●					●
U4	SUPERIOR	●	●	●	●	●				●	●	●	●	●	●	●
U4 SPEED	SUPERIOR	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
DB4	SUPERIOR	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
U4 PROTECT	SUPERIOR	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
U5 SPEED	EVOLUTION	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●
U5 PROTECT	EVOLUTION	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●
U7 SPEED	XTREME	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●
◆ STONE PLATES / ROOF TILES																
S3 TURBO	PERFECT		●	●	●	●	●	●	●	●	●	●	●	●	●	●
S5 TURBO PROTECT	EVOLUTION		●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●
S5 TURBO	EVOLUTION		●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●
◆ TILES / STONWARE																
F3	PERFECT															
F4 CERA	SUPERIOR		●	●							●					●
F5 CERA SPEED	SUPERIOR		●●	●●	●●						●				●●	
◆ CONCRETE																
B4	SUPERIOR	●					●	●	●					●●	●●	●●
B5	EVOLUTION	●●	●	●	●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●	●●
◆ GRANITE / HARD STONES																
G4	SUPERIOR		●●●	●●●		●	●●	●●	●●	●	●●	●●	●●	●●	●●	●●
◆ ABRASIVE STONES / ASPHALT																
A4	SUPERIOR	●●				●●●					●●●					●●
A4 ASPHALT	SUPERIOR	●●				●●●					●●●					●●
A4 M	SUPERIOR	●●				●●					●					●●

You can get DRONCO Diamond cutting discs in different performance classes - from a standard product for occasional use up to the high-end product for professional applications. On the following pages you will always find the corresponding symbol for the respective performance class of the tools in the heading of each type.



PROFESSIONAL APPLICATION

High-end product: extremely fast cutting,
outstanding lifetime, minimum effort



DEMANDING APPLICATION

Very good cutting performance, high lifetime



STANDARD APPLICATION

Good cutting performance, good service life

Universal | Construction site materials

ST-7	quality	Dry and wet cutting	★★★★★
	<p>Sintered, segmented diamond cutting disc. All-round diamond cutting disc at a fair price. Packing unit: 1 pc.</p>	<p> All kind of construction site material</p> 	

dimension mm	dimension inch	speed r.p.m.	number of segments	height of segments in mm	shape	item code	bar code
115 x 2 x 22,23	4 1/2 x 5/64 x 7/8	13280	9	7	C 3	4110485100	412406
125 x 2 x 22,23	5 x 5/64 x 7/8	12200	9	7	C 3	4120485100	422405
180 x 2,2 x 22,23	7 x 3/32 x 7/8	8600	14	7	C 3	4180485100	442403
230 x 2,4 x 22,23	9 x 3/32 x 7/8	6600	18	7	C 3	4230485100	452402

U3	perfect	Dry and wet cutting	★★★★★
	<p>Sintered, segmented diamond cutting blade designed to cut construction site materials with a good price-performance ratio. Packing unit: 1 pc.</p>	<p> All kinds of construction site materials, e.g. concrete, exposed aggregate concrete, bricks.</p>  	

dimension mm	dimension inch	speed r.p.m.	number of segments	height of segments in mm	shape	item code	bar code
115 x 2 x 22,23	4,5 x 5/64 x 7/8	13280	8	10	C3	4113810100	040012
125 x 2 x 22,23	5 x 5/64 x 7/8	12200	9	10	C3	4123810100	040029
180 x 2,4 x 22,23	7 x 3/32 x 7/8	8600	13	10	C3	4183810100	040036
230 x 2,5 x 22,23	9 x 3/32 x 7/8	6600	16	10	C3	4233810100	040043
300 x 3 x 20	12 x 7/64 x 3/4	6400	22	10	C3	4303805100	040050
300 x 3 x 22,23	12 x 7/64 x 7/8	6400	22	10	C3	4303810100	040067
300 x 3 x 25,4	12 x 7/64 x 1	6400	22	10	C3	4303815100	040074
350 x 3,2 x 25,4	14 x 7/64 x 1	5500	20	10	C3	4353815100	040081

DIAMOND CUTTING DISCS



U4

superior

Dry and wet cutting

★★★★★



Laser welded, segmented blade designed to cut construction site materials dry or wet. Maximum safety and very good cutting results at a reasonable price.
Packing unit: 1 pc.

Construction site materials,
e.g. concrete, exposed aggregate
concrete, border stones.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE
115 x 2,2 x 22,23	4,5 x 3/32 x 7/8	13280	9	10	C3	4114185100	040098
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	10	10	C3	4124185100	040104
150 x 2,4 x 22,23	6 x 3/32 x 7/8	10200	12	10	C3	4154185100	040111
180 x 2,4 x 22,23	7 x 3/32 x 7/8	8600	14	10	C3	4184185100	040128
230 x 2,4 x 22,23	9 x 3/32 x 7/8	6600	16	10	C3	4234185100	040135
300 x 2,8 x 20	12 x 7/64 x 3/4	6400	16	10	C3	4304180100	040142
300 x 2,8 x 22,23	12 x 7/64 x 7/8	6400	16	10	C3	4304182100	040159
300 x 2,8 x 25,4	12 x 7/64 x 1	6400	16	10	C3	4304190100	040166
300 x 2,8 x 30	12 x 7/64 x 1 1/5	6400	16	10	C3	4304192100	041491
350 x 2,8 x 20	14 x 7/64 x 3/4	5500	19	10	C3	4354180100	040173
350 x 2,8 x 22,23	14 x 7/64 x 7/8	5500	19	10	C3	4354185100	040180
350 x 2,8 x 25,4	14 x 7/64 x 1	5500	19	10	C3	4354190100	040197
350 x 2,8 x 30	14 x 7/64 x 1 1/5	5500	19	10	C3	4354195100	040203
400 x 3,2 x 25,4	16 x 7/64 x 1	4780	28	10	C3	4404190100	040210
450 x 3,6 x 25,4	18 x 1/8 x 1	4250	32	10	C3	4454190100	040227

U4 speed

superior

Dry and wet cutting

★★★★★



Laser-welded universal diamond blade with a wide field of application.
Special speed-slot segments allow high cutting speed and good all-round performance at an attractive price.
The punched steel core ensures a smooth operation with optimum cooling. Outstanding price-performance ratio.
Packing unit: 1 pc.

For concrete, reinforced concrete, natural stone and construction site materials



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE
115 x 2,2 x 22,23	4,5 x 3/32 x 7/8	13280	9	10	C3	4114521100	040234
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	10	10	C3	4124521100	040241
180 x 2,4 x 22,23	7 x 3/32 x 7/8	8600	14	10	C3	4184521100	040258
230 x 2,6 x 22,23	9 x 7/64 x 7/8	6600	15	10	C3	4234521100	040265
300 x 3 x 20	12 x 7/64 x 3/4	6400	20	10	C3	4304521100	040272
300 x 3 x 25,4	12 x 7/64 x 1	6400	20	10	C3	4304525100	040289
350 x 3 x 25,4	14 x 7/64 x 1	5500	23	10	C3	4354525100	040296

DB4
superior
Dry and wet cutting


The all-round product with a voracious appetite for cutting - for universal use in a broad range of applications on construction sites or by emergency services. The steel blade is directly coated with diamonds in a special vacuum process.

Packing unit: 1 pc.

Very good cutting abilities in many materials such as artificial and natural stone: concrete, reinforced concrete, exposed aggregate concrete, concrete paving, Indian granite, quarry slabs, granite slabs, sandlime stone, bricks. Metals: iron constructions and iron profiles, cast iron, sheet metals, non-ferrous metals, ductile pipes. Plastics, fibreglass, carbon fibre, wood, rubber, etc.



Ø 115 & 125 mm

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 2,4 x 22,23	4,5 x 3/32 x 7/8	13280	9	6	C3	4114208100	040302
125 x 2,4 x 22,23	5 x 3/32 x 7/8	12200	10	6	C3	4124208100	040319
180 x 2,6 x 22,23	7 x 7/64 x 7/8	8600	14	7	C3	4184208100	040326
230 x 2,6 x 22,23	9 x 7/64 x 7/8	6600	16	8	C3	4234208100	040333
300 x 3 x 20	12 x 7/64 x 3/4	6400	20	8	C3	4304207100	040340
350 x 3,4 x 20	14 x 1/8 x 3/4	5500	24	8	C3	4354207100	040357

U4 protect
superior
Dry and wet cutting


The laser welded universal diamond cutting blade with noise reducing sandwich core combines best working practice with an excellent cutting performance and a reasonable price.

Packing unit: 1 pc.

- reduces noise and vibration*
- excellent cutting speed
- high lifetime thanks to its 10 mm segments

All-round product for concrete, reinforced concrete, natural stone and construction site materials



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 2,2 x 22,23	4,5 x 3/32 x 7/8	13280	9	10	C3	4114234100	040364
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	10	10	C3	4124234100	040371
230 x 2,6 x 22,23	9 x 7/64 x 7/8	6600	16	10	C3	4234234100	040388
300 x 2,8 x 20	12 x 7/64 x 3/4	6400	20	10	C3	4304232100	040395
300 x 2,8 x 22,23	12 x 7/64 x 7/8	6400	20	10	C3	4304234100	040401
300 x 2,8 x 25,4	12 x 7/64 x 1	6400	20	10	C3	4304236100	040418

*U4 protect ~ 8 db (A), dimension 230 mm, in comparison to a U4 diamond blade

DIAMOND CUTTING DISCS



U5 speed



evolution

Our bestseller: Laser welded all-round cutting blade with speed segments for an ultimately fast cutting speed and clean cutting edges. Excellent universality, outstanding lifetime. Can be used for soft, abrasive stones as well as hard natural stones. No cooling brakes needed.
Packing unit: 1 pc.

Dry and wet cutting

★★★★★

All kind of construction site materials, e.g. basalt, concrete, reinforced concrete, cotto, ductile and cast pipes, gneiss, granite, clinker bricks, porphyry, exposed aggregate concrete, bricks, etc.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 2,2 x 22,23	4,5 x 3/32 x 7/8	13280	8	12	C3	4115386100	040654
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	9	12	C3	4125386100	040661
180 x 2,4 x 22,23	7 x 3/32 x 7/8	8600	12	12	C3	4185386100	040678
230 x 2,6 x 22,23	9 x 7/64 x 7/8	6600	16	15	C3	4235386100	040685
300 x 3,2 x 20	12 x 7/64 x 3/4	6400	21	15	C3	4305657100	040692
300 x 3,2 x 25,4	12 x 7/64 x 1	6400	21	15	C3	4305667100	040708
350 x 3,2 x 20	14 x 7/64 x 3/4	5500	25	15	C3	4355657100	040715
350 x 3,2 x 22,23	14 x 7/64 x 7/8	5500	25	15	C3	4355662100	040722
350 x 3,2 x 25,4	14 x 7/64 x 1	5500	25	15	C3	4355667100	040739

U5 protect



evolution

Laser welded all-round diamond disc with a special sandwich steel core, which reduces vibration noticeably and noise by 50 %. The segments are made of high performance diamonds and a bonding designed for extremely high cutting speeds. Clean cutting properties and a very good lifetime are also features of this product. The field of applications ranges from hard to soft materials, abrasive materials, as well as reinforced materials. The disc can be used without cooling brakes.

Packing unit: 1 pc.

Do you know the latest legal regulations based on the EU guidelines for protecting workers from noise and vibration? The U5 protect allows responsible employers to provide their staff with tools, which significantly reduce health damaging factors in the work environment. A reduction in noise level by minus 10 db(A) = halving the volume. The U5 protect features an extraordinary high-tech steel core, which reduces the sound level by 50 %. This also makes the experience of the cutting procedure around the construction site much more pleasant. Another bonus for the operator is the noticeably lower vibration level. These two factors add up to important protection for the health of the operator. And this is achieved with no loss in performance. The U5 protect offers outstanding cutting speed and the lower vibration level also reduces wear and tear on the segments - increasing the lifetime of the product.

50% less noise, noticeable less vibration

- ▷ high-performance diamonds for outstanding cutting speed
- ▷ excellent lifetime
- ▷ no cooling brakes
- ▷ noise and vibration reduced

Dry and wet cutting



All kind of construction site materials, e.g. concrete, reinforced concrete, exposed aggregate concrete. Usable for hard stones, gneiss, granite, clinker bricks, porphyry, bricks, ductile and cast pipes etc.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
230 x 2,8 x 22,23	9 x 7/64 x 7/8	6600	16	10	C3	4235613100	040746
300 x 2,8 x 20	12 x 7/64 x 3/4	6400	20	12	C3	4305603100	040753
300 x 2,8 x 25,4	12 x 7/64 x 1	6400	20	12	C3	4305624100	040760
350 x 2,8 x 20	14 x 7/64 x 3/4	5500	24	12	C3	4355603100	040777
350 x 2,8 x 25,4	14 x 7/64 x 1	5500	24	12	C3	4355624100	040784

DIAMOND CUTTING DISCS



U7 speed

xtreme

Dry and wet cutting

★★★★★



The special, geometrically arranged diamonds within the segments of the ultra fast and indestructible, laser welded all-round blade guarantee outstanding cutting abilities. It's the perfect product for the intensive, professional use. No cooling brakes needed.
Packing unit: 1 pc.

The new U7 speed sets standards and combines all the features a top all-round disc can offer:

- Extremely high cutting speed thanks to its innovative segment technology with geometrically arranged high-performance diamonds. Segments and bond have been optimized for an optimum cutting speed and universal use.
- Flat 15 mm segments with compact volume, a high diamond density and an optimized bond ensure an outstanding lifetime during the daily all-round use.
- Effortless cutting without physical exertion.

All kind of construction site materials, e.g. concrete, reinforced concrete, exposed aggregate concrete. Usable for hard stones, gneiss, granite, clinker bricks, porphyry, bricks, ductile and cast pipes etc.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 2,2 x 22,23	4,5 x 3/32 x 7/8	13280	9	12	C3	4117135100	040562
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	9	12	C3	4127135100	040579
180 x 2,4 x 22,23	7 x 3/32 x 7/8	8600	12	12	C3	4187135100	040586
230 x 2,6 x 22,23	9 x 7/64 x 7/8	6600	16	15	C3	4237135100	040593
300 x 3,2 x 20	12 x 7/64 x 3/4	6400	21	15	C3	4307134100	040609
300 x 3,2 x 25,4	12 x 7/64 x 1	6400	21	15	C3	4307136100	040616
350 x 3,2 x 20	14 x 7/64 x 3/4	5500	25	15	C3	4357134100	040623
350 x 3,2 x 22,23	14 x 7/64 x 7/8	5500	25	15	C3	4357135100	040630
350 x 3,2 x 25,4	14 x 7/64 x 1	5500	25	15	C3	4357136100	040647



▼ Stone plates | Roof tiles

S3 turbo	perfect	Dry and wet cutting	★★★★★
A circular diamond blade with a white and orange label in the center. The label reads 'DRONCO', 'S3 turbo', 'STEINPLATTEN', '230 mm', '22,23', '7/8'.	<p>The price-worthy alternative. Sintered dry cutting blade designed to cut construction site materials. The continuous cutting rim produces a clean cut without any chipping.</p> <p>Packing unit: 1 pc.</p> <p>The cutting depth should not exceed 2 cm.</p>		<p>Concrete, concrete roofing tiles, fireproof stones, gneiss, granite, terrazzo, bricks.</p>
<hr/>			
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS
115 x 2,1 x 22,23	4,5 x 5/64 x 7/8	13280	-
125 x 2,1 x 22,23	5 x 5/64 x 7/8	12200	-
180 x 2,6 x 22,23	7 x 7/64 x 7/8	8600	-
230 x 2,8 x 22,23	9 x 7/64 x 7/8	6600	-
ITEM CODE	BAR CODE		
4113460100	040791		
4123460100	040807		
4183460100	040814		
4233460100	040821		

S5 turbo protect	evolution	Dry and wet cutting	★★★★★
A circular diamond blade with a black and orange label in the center. The label reads 'DRONCO', 'S5 turbo protect', 'STEINPLATTEN', '230 mm', '22,23', '7/8'.	<p>Very comfortable turbo diamond blade with sandwich steel core.</p> <p>For cutting of natural and artificial stone plates.</p> <p>Packing unit: 1 pc.</p>		<p>Professional turbo blade also suitable for thicker stone plates of concrete, natural stone, roof tiles and terrazzo.</p>
<hr/>			
► pleasant working due to low vibration and reduced noise			The logo features the word 'protect' in blue with a green swoosh underneath. Below it, the words 'low noise low vibration' are written, accompanied by a small ear icon and a hand icon.
► excellent cutting speed			
► outstanding lifetime			
► laterally extended segments for faster material ejection			
► waved steel blade for optimal cooling			
► the perfect combination for satisfactory working comfort, with good cutting ability at an attractive price			
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS
115 x 2,2 x 22,23	4,5 x 3/32 x 7/8	13280	-
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	-
230 x 2,8 x 22,23	9 x 7/64 x 7/8	6600	-
ITEM CODE	BAR CODE		
4115466100	040838		
4125466100	040845		
4235466100	040852		

*S5 turbo protect - 8 db (A), dimension 230 mm, in comparison to a U4 diamond blade

DIAMOND CUTTING DISCS



S5 turbo

evolution

Dry and wet cutting

★★★★★



The premium turbo blade from DRONCO. The new type of 9 mm castle segments and a smooth, perforated stainless steel core are the prime features of this product. With this turbo blade you don't have to worry about limitations to the cutting depth. Smooth running, excellent all-round qualities, outstanding lifetime and clean cutting edges make this product a real all-rounder on any construction site. Especially for roofers and garden and landscape construction.

Packing unit: 1 pc.

Professional turbo blade also suitable for thicker stone plates. Very good cutting results and lifetime in concrete, concrete roofing slabs, gneiss, granite, terrazzo, bricks, roofing tiles.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 2,2 x 22,23	4,5 x 3/32 x 7/8	13280	-	9	GR	4115441100	040869
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	-	9	GR	4125441100	040876
180 x 2,5 x 22,23	7 x 3/32 x 7/8	8600	-	9	GR	4185441100	040883
230 x 2,5 x 22,23	9 x 3/32 x 7/8	6600	-	9	GR	4235441100	040890

▼ Tiles | Stoneware

F3

perfect

Dry and wet cutting

★★★☆☆



Well proven, sintered diamond cutting blade with continuous cutting rim for clean cutting edges.

Packing unit: 1 pc.

For cutting tiles, wall tiles, floor tiles, stove tiles.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
100 x 1,8 x 16	4 x 5/64 x 5/8	15300	-	5	GR	4103500100	040906
110 x 1,9 x 22,23	4,5 x 5/64 x 7/8	13900	-	5	GR	4113509100	040913
115 x 1,9 x 22,23	4,5 x 5/64 x 7/8	13280	-	5	GR	4113510100	040920
125 x 1,9 x 22,23	5 x 5/64 x 7/8	12200	-	5	GR	4123510100	040937
150 x 2,1 x 22,23	6 x 5/64 x 7/8	10200	-	5	GR	4153510100	040944
150 x 2,1 x 25,4	6 x 5/64 x 1	10200	-	5	GR	4153515100	040951
180 x 2,3 x 22,23	7 x 3/32 x 7/8	8600	-	5	GR	4183510100	040968
180 x 2,3 x 25,4	7 x 3/32 x 1	8600	-	5	GR	4183515100	040975
200 x 2,4 x 22,23	8 x 3/32 x 7/8	7600	-	5	GR	4203510100	040982
200 x 2,5 x 25,4	8 x 3/32 x 1	7600	-	5	GR	4203515100	040999
230 x 2,4 x 22,23	9 x 3/32 x 7/8	6600	-	5	GR	4233510100	041002
250 x 2,4 x 25,4	10 x 3/32 x 1	6100	-	5	GR	4253515100	041019

F4 cera
superior
Dry and wet cutting



Tiler's favourite. Thin diamond cutting blade with a continuous turbo rim for cutting of stone plates of granite or other hard stones, as well as stoneware and high fired tiles. Fast and effortless cutting.

Offers an excellent cutting performance and lifetime.
Clean cutting edges.
7.5 mm segment height.
Packing unit: 1 pc.

For cutting stoneware and high fired tiles. Ideal for natural stone plates of marble, granite or terrazzo as well.



- ⦿ outstanding cutting speed
- ⦿ very good lifetime
- ⦿ continuous turbo rim for clean cutting edges
- ⦿ smooth and easy to use

DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 1,4 x 22,23	4,5 x 1/8 x 7/8	13280	-	7,5	GR	4114512100	041026
125 x 1,4 x 22,23	5 x 1/8 x 7/8	12200	-	7,5	GR	4124512100	041033
150 x 2 x 25,4	6 x 5/64 x 1	10200	-	7,5	GR	4154517100	041040
180 x 2 x 22,23	7 x 5/64 x 7/8	8600	-	7,5	GR	4184512100	041057
180 x 2 x 25,4	7 x 5/64 x 1	8600	-	7,5	GR	4184517100	041064
200 x 2 x 22,23	8 x 5/64 x 7/8	7600	-	7,5	GR	4204512100	041071
200 x 2 x 25,4	8 x 5/64 x 1	7600	-	7,5	GR	4204517100	041088
230 x 2 x 22,23	9 x 5/64 x 7/8	6600	-	7,5	GR	4234512100	041095
250 x 2 x 25,4	10 x 5/64 x 1	6100	-	7,5	GR	4254517100	041101
300 x 2 x 25,4	12 x 5/64 x 1	6400	-	7,5	GR	4304517100	041118
300 x 2 x 30	12 x 5/64 x 1 1/5	6400	-	7,5	GR	4304518100	041507
350 x 2 x 25,4	14 x 5/64 x 1	5500	-	7,5	GR	4354517100	041125
350 x 2 x 30	14 x 5/64 x 1 1/5	5500	-	7,5	GR	4354518100	041514

DIAMOND CUTTING DISCS



F5 cera speed

evolution

Dry and wet cutting



Thanks to its thickness of only 1.2 mm and the special geometry of the continuous rim, the F5 cera speed ensures both, an exceptional cutting speed and a comfortable and smooth operation. The 10 mm segments guarantee an optimum lifetime. The integrated flange around the bore makes sure that the blade can be used safely in every situation.

Packing unit: 1 pc.

- 1.2 mm thin cutting rim with special geometry
- clean cutting edges
- minimal material loss
- exceptionally fast cutting
- easy to use
- 10 mm segment height

For cutting quarry tiles, stoneware and granite slabs.



dimension mm	dimension inch	speed r.p.m.	number of segments	height of segments in mm	shape	item code	bar code
115 x 1,2 x 22,23	4,5 x 3/64 x 7/8	13280	-	10	GR	4115514100	041132
125 x 1,2 x 22,23	5 x 3/64 x 7/8	12200	-	10	GR	4125514100	041149

PLEASE NOTE

This product is also suitable for battery-powered angle grinders in diameters 115 and 125 mm.



▼ Concrete

B4	superior	Dry and wet cutting	★★★★☆																																																																																																								
	<p>Aggressive, laser welded diamond cutting blade for professional use in concrete and composite concrete paving. Particularly well-balanced segment bonding guarantees cutting without problems of all types of concrete, even with reinforcement.</p> <p>Packing unit: 1 pc.</p>	<p>Concrete, cotto plates, exposed aggregate concrete, composite concrete paving, concrete roofing tiles, terrazzo.</p>	  																																																																																																								
<table border="1"> <thead> <tr> <th>DIMENSION MM</th><th>DIMENSION INCH</th><th>SPEED R.P.M.</th><th>NUMBER OF SEGMENTS</th><th>HEIGHT OF SEGMENTS IN MM</th><th>SHAPE</th><th>ITEM CODE</th><th>BAR CODE 4081600</th></tr> </thead> <tbody> <tr><td>115 x 2 x 22,23</td><td>4,5 x 5/64 x 7/8</td><td>13280</td><td>9</td><td>10</td><td>C3</td><td>4114110100</td><td>041156</td></tr> <tr><td>125 x 2 x 22,23</td><td>5 x 5/64 x 7/8</td><td>12200</td><td>10</td><td>10</td><td>C3</td><td>4124110100</td><td>041163</td></tr> <tr><td>150 x 2,2 x 22,23</td><td>6 x 3/32 x 7/8</td><td>10200</td><td>12</td><td>10</td><td>C3</td><td>4154110100</td><td>041170</td></tr> <tr><td>180 x 2,2 x 22,23</td><td>7 x 3/32 x 7/8</td><td>8600</td><td>14</td><td>10</td><td>C3</td><td>4184110100</td><td>041187</td></tr> <tr><td>230 x 2,4 x 22,23</td><td>9 x 3/32 x 7/8</td><td>6600</td><td>16</td><td>10</td><td>C3</td><td>4234110100</td><td>041194</td></tr> <tr><td>300 x 2,8 x 20</td><td>12 x 7/64 x 3/4</td><td>6400</td><td>16</td><td>10</td><td>C3</td><td>4304105100</td><td>041200</td></tr> <tr><td>300 x 2,8 x 22,23</td><td>12 x 7/64 x 7/8</td><td>6400</td><td>16</td><td>10</td><td>C3</td><td>4304110100</td><td>041217</td></tr> <tr><td>300 x 2,8 x 25,4</td><td>12 x 7/64 x 1</td><td>6400</td><td>16</td><td>10</td><td>C3</td><td>4304115100</td><td>041224</td></tr> <tr><td>350 x 2,8 x 20</td><td>14 x 7/64 x 3/4</td><td>5500</td><td>19</td><td>10</td><td>C3</td><td>4354105100</td><td>041231</td></tr> <tr><td>350 x 2,8 x 22,23</td><td>14 x 7/64 x 7/8</td><td>5500</td><td>19</td><td>10</td><td>C3</td><td>4354110100</td><td>041248</td></tr> <tr><td>350 x 2,8 x 25,4</td><td>14 x 7/64 x 1</td><td>5500</td><td>19</td><td>10</td><td>C3</td><td>4354115100</td><td>041255</td></tr> <tr><td>400 x 3,2 x 25,4</td><td>16 x 7/64 x 1</td><td>4780</td><td>28</td><td>10</td><td>C3</td><td>4404116100</td><td>041262</td></tr> </tbody> </table>				DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600	115 x 2 x 22,23	4,5 x 5/64 x 7/8	13280	9	10	C3	4114110100	041156	125 x 2 x 22,23	5 x 5/64 x 7/8	12200	10	10	C3	4124110100	041163	150 x 2,2 x 22,23	6 x 3/32 x 7/8	10200	12	10	C3	4154110100	041170	180 x 2,2 x 22,23	7 x 3/32 x 7/8	8600	14	10	C3	4184110100	041187	230 x 2,4 x 22,23	9 x 3/32 x 7/8	6600	16	10	C3	4234110100	041194	300 x 2,8 x 20	12 x 7/64 x 3/4	6400	16	10	C3	4304105100	041200	300 x 2,8 x 22,23	12 x 7/64 x 7/8	6400	16	10	C3	4304110100	041217	300 x 2,8 x 25,4	12 x 7/64 x 1	6400	16	10	C3	4304115100	041224	350 x 2,8 x 20	14 x 7/64 x 3/4	5500	19	10	C3	4354105100	041231	350 x 2,8 x 22,23	14 x 7/64 x 7/8	5500	19	10	C3	4354110100	041248	350 x 2,8 x 25,4	14 x 7/64 x 1	5500	19	10	C3	4354115100	041255	400 x 3,2 x 25,4	16 x 7/64 x 1	4780	28	10	C3	4404116100	041262
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600																																																																																																				
115 x 2 x 22,23	4,5 x 5/64 x 7/8	13280	9	10	C3	4114110100	041156																																																																																																				
125 x 2 x 22,23	5 x 5/64 x 7/8	12200	10	10	C3	4124110100	041163																																																																																																				
150 x 2,2 x 22,23	6 x 3/32 x 7/8	10200	12	10	C3	4154110100	041170																																																																																																				
180 x 2,2 x 22,23	7 x 3/32 x 7/8	8600	14	10	C3	4184110100	041187																																																																																																				
230 x 2,4 x 22,23	9 x 3/32 x 7/8	6600	16	10	C3	4234110100	041194																																																																																																				
300 x 2,8 x 20	12 x 7/64 x 3/4	6400	16	10	C3	4304105100	041200																																																																																																				
300 x 2,8 x 22,23	12 x 7/64 x 7/8	6400	16	10	C3	4304110100	041217																																																																																																				
300 x 2,8 x 25,4	12 x 7/64 x 1	6400	16	10	C3	4304115100	041224																																																																																																				
350 x 2,8 x 20	14 x 7/64 x 3/4	5500	19	10	C3	4354105100	041231																																																																																																				
350 x 2,8 x 22,23	14 x 7/64 x 7/8	5500	19	10	C3	4354110100	041248																																																																																																				
350 x 2,8 x 25,4	14 x 7/64 x 1	5500	19	10	C3	4354115100	041255																																																																																																				
400 x 3,2 x 25,4	16 x 7/64 x 1	4780	28	10	C3	4404116100	041262																																																																																																				

DIAMOND CUTTING DISCS



B5

evolution

Dry and wet cutting

★★★★★



Laser welded top-class product with aggressive high-performance diamonds. Extremely fast, effortless cutting. For professional use in all sorts of concrete, even with reinforcement. No cooling brakes needed.

Packing unit: 1 pc.

- ▷ best cutting abilities for a fast work progress
- ▷ excellent lifetime
- ▷ no cooling brakes

Concrete, cotto plates, exposed aggregate concrete, composite concrete paving, concrete roofing tiles, terrazzo.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 2 x 22,23	4,5 x 5/64 x 7/8	13280	8	10	C3	4115611100	040425
125 x 2 x 22,23	5 x 5/64 x 7/8	12200	9	10	C3	4125611100	040432
150 x 2,2 x 22,23	6 x 3/32 x 7/8	10200	10	10	C3	4155611100	040449
180 x 2,2 x 22,23	7 x 3/32 x 7/8	8600	12	10	C3	4185611100	040456
230 x 2,4 x 22,23	9 x 3/32 x 7/8	6600	15	12	C3	4235611100	040463
250 x 2,6 x 25,4	10 x 7/64 x 1	6100	18	12	C3	4255616100	040470
300 x 2,8 x 20	12 x 7/64 x 3/4	6400	18	12	C3	4305606100	040487
300 x 2,8 x 25,4	12 x 7/64 x 1	6400	18	12	C3	4305616100	040494
350 x 2,8 x 20	14 x 7/64 x 3/4	5500	21	12	C3	4355606100	040500
350 x 2,8 x 25,4	14 x 7/64 x 1	5500	21	12	C3	4355616100	040517
400 x 3,5 x 25,4	16 x 1/8 x 1	4780	28	12	C3	4405616100	040524
450 x 3,5 x 25,4	18 x 1/8 x 1	4250	32	12	C3	4455616100	040531
500 x 4 x 25,4	20 x 5/32 x 1	3800	36	12	C3	4505616100	040548
600 x 4 x 25,4	24 x 5/32 x 1	3170	42	12	C3	4605616100	040555

▼ Granite | Hard Stones

G4	superior	Dry and wet cutting	★★★★★
	<p>High-performance, laser welded diamond cutting blade for the effortless cutting of natural stones. The very soft bond was designed for applications where extremely shock-resistant diamonds are required.</p> <p>Packing unit: 1 pc.</p>		<p>Special blade for hard natural stones such as granite, basalt, slate, terrazzo, clinker, gneiss and porphyry.</p>
<hr/>			
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS
115 x 2 x 22,23	4,5 x 5/64 x 7/8	13280	8
125 x 2 x 22,23	5 x 5/64 x 7/8	12200	9
150 x 2,2 x 22,23	6 x 3/32 x 7/8	10200	12
180 x 2,2 x 22,23	7 x 3/32 x 7/8	8600	14
230 x 2,4 x 22,23	9 x 3/32 x 7/8	6600	15
300 x 2,8 x 25,4	12 x 7/64 x 1	6400	21
350 x 2,8 x 20	14 x 7/64 x 3/4	5500	25
350 x 2,8 x 25,4	14 x 7/64 x 1	5500	25
400 x 3,2 x 25,4	16 x 7/64 x 1	4780	28
			ITEM CODE BAR CODE 4081600
			4114010100 041408
			4124010100 041415
			4154010100 041422
			4184010100 041439
			4234010100 041446
			4304015100 041453
			4354005100 041460
			4354015100 041477
			4404015100 041484

▼ Abrasive Stones | Asphalt

A4	superior	Dry and wet cutting	★★★★★
	<p>Powerful, laser welded diamond cutting blade for the professional use in abrasive stones. The wear-resistant bond of the product ensures its outstanding suitability for abrasive materials.</p> <p>Packing unit: 1 pc.</p>		<p>Specially designed diamond blade for abrasive materials such as sand-lime stone, screed, plaster, sandstone, aerated concrete, bricks or pantiles.</p>
<hr/>			
DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS
115 x 2,2 x 22,23	4,5 x 3/32 x 7/8	13280	9
125 x 2,2 x 22,23	5 x 3/32 x 7/8	12200	10
230 x 2,4 x 22,23	9 x 3/32 x 7/8	6600	16
300 x 2,8 x 20	12 x 7/64 x 3/4	6400	16
350 x 2,8 x 25,4	14 x 7/64 x 1	5500	19
			ITEM CODE BAR CODE 4081600
			4114215100 041279
			4124215100 041286
			4234215100 041293
			4304225100 462159
			4354227100 472158

DIAMOND CUTTING DISCS



A4 Asphalt

superior

Dry and wet cutting

★★★★★



Powerful, laser welded diamond cutting disc for the professional use in asphalt. Also suitable for green concrete (up to 24 hours), screed and abrasive, soft materials.

Packing unit: 1 pc.

Special disc for asphalt, green concrete (up to 24 hours), screed and abrasive, soft materials.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
300 x 2,8 x 20	12 x 7/64 x 3/4	6400	18	10	C1S	4304920100	041309
300 x 2,8 x 25,4	12 x 7/64 x 1	6400	18	10	C1S	4304930100	041316
350 x 2,8 x 20	14 x 7/64 x 3/4	5500	21	10	C1S	4354920100	041323
350 x 2,8 x 25,4	14 x 7/64 x 1	5500	21	10	C1S	4354930100	041330
400 x 3,2 x 25,4	16 x 7/64 x 1	4780	24	10	C1S	4404930100	041347
450 x 3,8 x 25,4	18 x 9/64 x 1	4250	27	10	C1S	4454930100	041354
500 x 3,8 x 25,4	20 x 9/64 x 1	3800	30	10	C1S	4504930100	041361
600 x 3,8 x 25,4	24 x 9/64 x 1	3170	36	12	C1S	4604930100	041378

A4 M

superior

Dry cutting / Wall slot cutter

★★★★★



A powerful, laser welded, specially designed mortar raker disc for the easy removal of mortar residues from wall or screed joints.

Packing unit: 1 pc.

Special diamond blade for screed or plaster, aerated concrete, sandlime stone and bricks.



DIMENSION MM	DIMENSION INCH	SPEED R.P.M.	NUMBER OF SEGMENTS	HEIGHT OF SEGMENTS IN MM	SHAPE	ITEM CODE	BAR CODE 4081600
115 x 6,4 x 22,23	4,5 x 1/4 x 7/8	13280	9	7	C3	4114464100	041385
125 x 6,4 x 22,23	5 x 1/4 x 7/8	12200	10	7	C3	4124464100	041392

Diamond tile drill CeraDrill



The new Dronco CeraDrill drill-bits with vacuum-brazed diamond coating for maximum drilling performance.

They are used where conventional carbide or diamond drills reach their limits. The CeraDrill drill bit has an integrated cooling liquid that is released during the drilling operation.

Water cooling with its inconveniences is no longer necessary. Work efficiently and cleanly with CeraDrill.



With
vacuum-brazed
diamond
coating

- Integrated cooling liquid
- Simple and efficient working
- No water cooling required
- For tiles, stoneware, quarry tiles



CERADRILL DIAMOND TILE DRILL



The drills are supplied with a protective cap. The cap has to be removed before the first use. After completion the cap must be refitted.

| For tiles, stoneware and quarry tiles.

ITEM CODE	BAR CODE
4000601100	4081600
4000602100	400809
4000604100	400816
4000605100	400830
4000606100	400847
4000607100	400854
4001100100	400861
	400939

Packing: 1 pcs in plastic box, including cleaning stick



Only for drilling without hammer! Optimal speed = 1500 rpm.



Operating instructions:

- ▷ Remove the protection cap.
- ▷ Start the drilling at an incline, then move to horizontal.
- ▷ Use the drilling aid for vertical drilling.
- ▷ Remove dust.
- ▷ Work with rotatory moves.
- ▷ A cooling break of 2 minutes is required after every hole.
- ▷ Clean the head after every hole with the cleaning stick provided (push dirt and dust inside the drill).
- ▷ When you have finished the application, refit the protective cap onto the drill.



Advice:

We recommend a trial drilling in a tile before you make a drilling operation in an already tiled bathroom!

CERADRILL-SET | ALUMINIUM CASE WITH 5 CERADRILL DRILL BITS, DRILLING AID AND CLEANING STICK



For tiles, stoneware and quarry tiles.

DIMENSION	ITEM CODE	BAR CODE
Ø 5, 6, 8, 10, 12 mm	4000600100	400496


Diamond dry drill for angle grinders CeraDrill DRY

**SERA
DRILL DRY**



Diamond dry drill CeraDrill DRY

★★★★

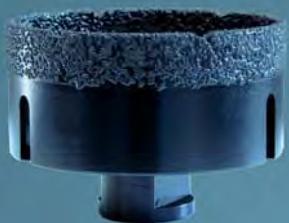

Product similar to photo

Vacuum-brazed, diamond coated special drill for dry drilling of fine stoneware, quarry tiles, ceramic and granite tiles.

fine stoneware, quarry tiles, ceramic and granite tiles.

The new CeraDrill DRY drills complete our CeraDrill range with diameters available from 20 mm up to 85 mm.

- for use on angle grinders with a M14 adaptor
- no cooling system necessary
- high drilling speed
- maximum lifetime

DIAMETER	LENGTH	DRILLING DEPTH	ADAPTOR	SPEED R.P.M.	ITEM CODE	BAR CODE 4081600
20mm	60mm	40mm	M 14	13280	4000610100	401004
27mm	60mm	40mm	M 14	13280	4000611100	401011
35mm	60mm	40mm	M 14	13280	4000612100	401028
40mm	60mm	40mm	M 14	13280	4000613100	401035
45mm	60mm	40mm	M 14	13280	4000614100	401042
50mm	60mm	40mm	M 14	13280	4000615100	401059
60mm	60mm	40mm	M 14	13280	4000616100	401066
65mm	60mm	40mm	M 14	13280	4000617100	401073
70mm	60mm	40mm	M 14	13280	4000618100	401080
75mm	60mm	40mm	M 14	13280	4000619100	401097
80mm	60mm	40mm	M 14	13280	4000620100	401103
85mm	60mm	40mm	M 14	13280	4000621100	401110

Packing: 1 pcs in plastic box, including cleaning stick



Diamond dry drill for angle grinders

available in twelve diameters from 20 up to 85 mm



The correct preparation and use:



max. r.p.m. 11.000

► We recommend the use on an angle grinder for 125 mm discs

Diamond core bits

for dry drilling of wall sockets and distribution boxes.

They provide the ideal means of cutting holes for wall sockets and light switches (68 mm) or distribution boxes (82 mm). (Other diameters available upon request)

BKT EVO Beton	Diamond core bit	★★★★
 product similar to photo	Laser-welded core drill with outstanding service life and high efficiency. Suitable for all applications thanks to the innovative bonding of high-quality diamond segments.	Concrete (also lightly reinforced), clinker, brick.
DESCRIPTION	ITEM CODE	BAR CODE 4081600
Core bit Ø 68 mm	4000368100	400137
Core bit Ø 82 mm	4000382100	400236
Centre drill	4000478100	400304
6-point-connection	4000568100	400359
SDS-connection	4000668100	400403
Complete SDS-Set Ø 68 mm	4000268100	400120
Complete SDS-Set Ø 82 mm	4000282100	400229

BKT EVO Abrasiv	Diamond core bit	★★★★
 product similar to photo	Very good service life, rapid drilling progress, laser-welded, very hard bonding.	Sand-lime brick, sandstone, grinding stone, masonry.
DESCRIPTION	ITEM CODE	BAR CODE 4081600
Core bit Ø 68 mm	4010010100	400519
Core bit Ø 82 mm	4010050100	400502
Centre drill	4000478100	400304
6-point-connection	4000568100	400359
SDS-connection	4000668100	400403
Complete SDS-Set Ø 68 mm	4000269100	400151
Complete SDS-Set Ø 82 mm	4000283100	400168



Diamond cup grinders

Diamond cup grinders designed for use in conjunction with grinding machines equipped with extraction systems and angle grinders. These discs provide the perfect abrasive solution for stone. The removal capacity and service life have proved themselves in millions of applications in practical use.

Application chart diamond cup grinders

	DST	DST 56	DST 76	DST Turbo	DST Speed	DST BlueSpeed
REMOVAL OF UNEVENNESS ON FLOOR PAVEMENT	●	●	●●	●	●	●
REMOVAL OF ROUGHNESSES ON STONE AND PLASTER FLOORING	●	●●	●	●●	●●	●●
REMOVAL OF CONCRETE RIDGES AFTER THE REMOVAL OF THE FORMWORK	●	●●	●	●●	●●	●●
REMOVAL OF DRIED PLASTER RESIDUES	●	●	●●	●	●	●
BEVELING OF CONCRETE- AND PAVING STONE	●	●	●	●●	●	●
BEVELING OF GAS-AERATED CONCRETE	●	●	●●	●●	●	●
REMOVAL OF THERMOPLASTIC PROTECTIVE COATINGS	●	●	●	●●	●●	●●
REMOVAL OF ADHESIVE REMAINDERS ON CONCRETE SURFACES	●	●	●	●●	●●	●●

PLEASE NOTE

Speed R.P.M. - 80 m/s:

115 mm 13280

125 mm 12200

180 mm 8600



SECURITY ADVICE

When using diamond grinding discs, always make sure that the disc does not protrude from the protection of the machine => risk of injury

PLEASE NOTE

For concrete grinders, our diamond grinding discs DST 56 and DST 76 are also available in 22 mm height on request.

DST
perfect


Designed to work on stone and plaster flooring, but also suitable for removing concrete ridges and for stone-masonry.

Packing unit: 1 pc.

Ideal for all applications on concrete, natural stone, floor pavement, construction-site materials.


**DIMENSION
MM**
**NUMBER OF
SEGMENTS**
**SPEED
R.P.M.**
**ITEM CODE
SINGLE ROWED**
**BAR CODE
4081600**

115 x 18 x 22,23

8

13280

4116033100

411027

125 x 18 x 22,23

7

12200

4126033100

421026

180 x 18 x 22,23

14

8600

4186033100

441024

DST 56
special


Especially suited for grinding on concrete and natural stone. The optional single- or double-row arrangement of segments makes this DRONCO grinding disc ideal for all applications.

Packing unit: 1 pc.

For grinding on concrete and natural stone.



Single rowed

Double rowed

**DIMENSION
MM**
**NUMBER OF
SEGMENTS**
**ITEM CODE
SINGLE ROWED**
**BAR CODE
4081600**
**NUMBER OF
SEGMENTS**
**ITEM CODE
DUOBLE ROWED**
**BAR CODE
4081600**

115 x 18 x 22,23

8

4116032100

411010

16

4116037100

411041

125 x 18 x 22,23

7

4126032100

421019

14

4126037100

421040

180 x 18 x 22,23

14

28

4186037100

441048

For concrete grinders, DST 56 is also available in 22 mm height on request.

DST 76
special


Especially suitable for abrasive materials such as floor pavement, sand-lime stone, plaster, gas concrete, and green concrete. Ideal for all applications due to the optional single- or double-row arrangement of segments.

Packing unit: 1 pc.

For grinding on floor pavement, sand-lime stone, plaster, gas concrete, green concrete.



Single rowed

Double rowed

**DIMENSION
MM**
**NUMBER OF
SEGMENTS**
**ITEM CODE
SINGLE ROWED**
**BAR CODE
4081600**
**NUMBER OF
SEGMENTS**
**ITEM CODE
DUOBLE ROWED**
**BAR CODE
4081600**

115 x 18 x 22,23

8

4126031100

421002

16

4116036100

411034

125 x 18 x 22,23

7

4126031100

421002

14

4126036100

421033

180 x 18 x 22,23

14

4126031100

421002

28

4186036100

441031

For concrete grinders, DST 76 is also available in 22 mm height on request.



DST TURBO

special

★★★★★



Diamond cup grinder with turbo grinding rim, suited for grinding on concrete and natural stone. High stock removal with low power consumption.
Outstanding lifetime, smoother grinding surface.
Packing unit: 1pc.

For smoother grinding on concrete and natural stone.



**DIMENSION
MM**

**NUMBER OF
SEGMENTS**

**SPEED
R.P.M.**

**ITEM CODE
SINGLE ROWED**

**BAR CODE
4081600**

115 x 22,23

13280

4116041100

411065

125 x 22,23

12200

4126041100

420593

DST SPEED

special

★★★★★



It's all in the mix: Welded segments with optimal geometry that contain special diamonds in an aggressive bonding. For all applications where fast and extensive stock removal is required.

Packing unit: 1pc.

- ▷ **2.5 times higher stock removal***
- ▷ **segments with special diamonds with aggressive bonding**
- ▷ **removal of thermoplastic protective coatings and adhesive remainders**

For concrete, floor pavement and natural stone.



**optimised
segment
geometry**

**DIMENSION
MM**

**NUMBER OF
SEGMENTS**

**SPEED
R.P.M.**

ITEM CODE

**BAR CODE
4081600**

115 x 18 x 22,23

13280

4116042100

410488

125 x 18 x 22,23

12200

4126042100

420463

DST BLUE SPEED

special

★★★★★



The DST Blue Speed offers the highest removal rate within the range of DRONCO cup grinders. The low weight in combination with the specially designed segments provides a comfortable, user-friendly and effective work.

- ▷ **outstanding removal rate**
- ▷ **high working comfort**

For highest removal rate and a maximum comfortable grinding of concrete and natural stone, removing glue without glogging.



**DIMENSION
MM**

**NUMBER OF
SEGMENTS**

**SPEED
R.P.M.**

ITEM CODE

**BAR CODE
4081600**

115 x 22,23

13280

4116064100

412376

125 x 22,23

12200

4126064100

422375

**Abrasives from
DRONCO offer best quality
regarding**

- Grinding efficiency
- Grinding finish
- Lifetime
- Safety
- Economy



120 1-2-3-System
for hand sanding



124 1-2-3-4-System
for car body working



126 Fibre discs
for use on angle grinders



**128 Semi-flexible
discs**
for use on angle grinders




134 Economy rolls
for hand sanding

FLEXIBLE AND SEMI-FLEXIBLE ABRASIVES



FLEXIBLE AND SEMI-FLEXIBLE ABRASIVES

DRONCO 1-2-3-System for manual sanding.
Easy to handle and effective!

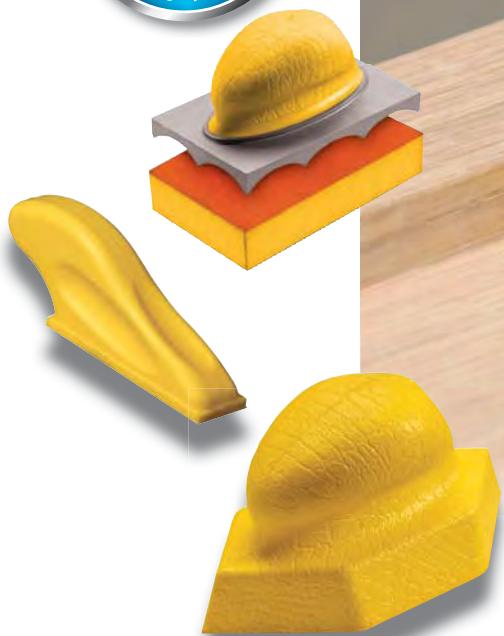

COLOUR CODED SHEETS FOR EASY RECOGNITION AS EXAMPLES BELOW:

1 st STEP: PRE-SANDING	2 nd STEP: SANDING	3 rd STEP: FINISHING
Pre-sanding with grit 80 for coarse grinding such as the removal of chipped paint and varnish as well as rounding of edges and burr removal.	Sanding with grit 120 for grinding works such as rust removal, effective paint removal and sanding of deep scratches and metal processing.	Finishing with grit 220. With this grit, you will obtain the optimum surface for subsequent glazing, painting or oiling of furniture.



FLEXIBLE AND SEMI-FLEXIBLE ABRASIVES



DRONCO 1-2-3-System for manual sanding - easy to handle and effective!
Ergonomic Mini-Sander

Mini Sander Set 91x27 mm	Dronco 1-2-3 System	Hand sanding	
 	<p>The Mini Sander is an easy-to-handle and effective grinding tool.</p> <p>Pressure can be applied with the index finger which makes it possible to reach areas which are difficult to access. Very suitable for the restoration of furniture and for refurbishing windows, doors and window shutters.</p> <p>The DRONCO 1-2-3 Mini Sander Set contains the ergonomic Sander plus 30 sanding sheets in three different grit. The abrasive paper can be used for both wood as well as metal.</p>	<p>Ergonomic Mini Sanding System for wood, metal, plastics, varnished surfaces and many more.</p>	
	  	  	
DESCRIPTION	CONTENT PC.	ITEM CODE	
Mini Sander Set 91 x 27 mm	Set with 30 sheets, assorted	6780200000	
BAR CODE 4081600		684001	
Refill pack Mini Sander	Dronco 1-2-3 System	Hand sanding	
	  		
DESCRIPTION	CONTENT PC.	ITEM CODE	BAR CODE
Refill pack Mini Sander 91 x 27 mm	30 sheets, assorted	6780210000	684018

DRONCO 1-2-3-System for manual sanding - easy to handle and effective!

Ergonomic Hexagon Sander

Hexagon Sander Set 150 x 75 mm

Dronco 1-2-3 System

Hand sanding



- 2x K80
- 2x K120
- 2x K220



The DRONCO 1-2-3 Hexagon Sander set is also available with 50 abrasive sheets, assorted in three different grits (20 x K80, 20 x K120, 10 x K220)

With its ergonomic shape, the Hexagon Sander is the perfect tool for all sanding projects. It enables an especially easy-to-handle, smooth and effective sanding of larger surfaces that also reaches into corners, areas which are hard to access or on longer edges. The ideal tool for the restoration of furniture and for various sanding works for example on wood, fibreglass, plasterboard, metal or varnished surfaces.

The DRONCO 1-2-3 Hexagon Sander set contains six abrasive sheets in three different grits. The abrasive sheets can be used on both wood and on metal.

Ergonomic manual sanding system for wood, metal, plastics, varnished surfaces and many more.



DESCRIPTION

CONTENT PC.

ITEM CODE

BAR CODE

4081600

Hexagon Sander Set 150 x 75 mm

Set with 6 sheets, assorted

6780220000

684032

Hexagon Sander Set 150 x 75 mm

Set with 50 sheets, assorted

6780221000

684070

Refill pack Hexagon Sander

Dronco 1-2-3 System

Hand sanding



DESCRIPTION

CONTENT PC.

ITEM CODE

BAR CODE

4081600

Refill pack Hexagon Sander 150 x 75 mm

6 sheets grit 80

6780230000

684049

Refill pack Hexagon Sander 150 x 75 mm

6 sheets grit 120

6780231000

684056

Refill pack Hexagon Sander 150 x 75 mm

6 sheets grit 220

678023200

684063

FLEXIBLE AND SEMI-FLEXIBLE ABRASIVES



DRONCO 1-2-3-System for manual sanding - easy to handle and effective! Sanding Sponge Set

Sanding Sponge Set with Handle



Dronco 1-2-3 System




Hand sanding

This handle allows the comfortable use of Sanding Sponges – without having to hold the sanding sponge in your hand.

The Sanding Sponges adjust to the processed surface very well and enable a smooth grinding.

- ▶ 1x Coarse Sponge grit 80, suitable for removing varnish and paint
- ▶ 2 x Medium Sponges grit 120, suitable for grinding of hard and soft wood, residue for plasterboard, fibreglass or metal surfaces
- ▶ 1x Fine Sponge grit 220 for the optimum grinding of surfaces before the application of a paint, glazing or varnish coating as well as before the oiling of furniture with teak oil or other liquid wood waxes.

Ergonomic manual sanding system for wood, metal, plastics, fibreglass, varnished surfaces, plasterboard and many more.




The DRONCO 1-2-3 Sanding Sponge set contains the ergonomic Handle plus four Sanding Sponges in three different grits (80, 120, 220). The Sanding Sponges can be used for multiple purposes.

DESCRIPTION	CONTENT PC.	ITEM CODE	BAR CODE 4081600
Sanding Sponge Set	Handle + 4 Sponges, grits assorted	6780290000	684100

DRONCO 1-2-3-4-System for car body works

Mini Car Sander Set


Mini Car Sander Set	Dronco 1-2-3-4 System	Hand sanding
 	<p>Designed for refinishing work on car bodies specifically smart repairs and awkward areas. DRONCO mini sanding set comes complete with three different grits of wet and dry paper.</p> <ul style="list-style-type: none"> ● Step 3: Grit 400 for primary flattening of repair area and first primer coats. ● Step 4: Grits 1000 to 1500 for de-nibbing and removal of imperfections. ● The 1500 grit can be used for slight scratch removal. 	<p>Ergonomic mini sanding system with wet and dry abrasive paper for fine car body and refinishing work, smart repairs and repair in awkward areas.</p> 
		<p>The DRONCO Mini Car Sander Set contains the ergonomic sander plus 30 sanding sheets in three different grits (grit 400, grit 1000, grit 1500).</p>
DESCRIPTION	CONTENT PC.	ITEM CODE
Mini Car Sander Set 91 x 27 mm	Set with 30 sheets, assorted	6780201000
		BAR CODE 4081600
		684025

FLEXIBLE AND SEMI-FLEXIBLE ABRASIVES



DRONCO 1-2-3-4-System for car body works


Oval Car Sander Set

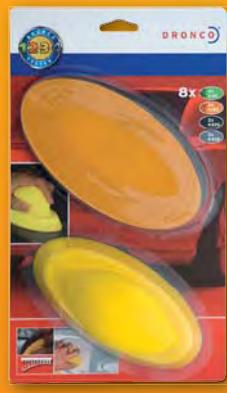
Oval Car Sander Set	Dronco 1-2-3-4 System	Hand sanding
 	<p>For sanding and refinishing works on larger surfaces and car bodies. DRONCO offers an oval freehand sander in a set with abrasive sheets in 4 grits :</p> <ul style="list-style-type: none"> ● Step 1: Grit 80 coarse: Removal of rust and damaged paintwork. Sanding of paint layers on wood, metal and plastics. ● Step 2: Grit 180 medium : Preparation of the repair area prior to body filler work or first primer coat and removal of imperfections. ● Step 3: Grits 80 and 180 for the dry finishing of body fillers. ● Step 4: Grits 320 and 400 for the final finish of repair area and for primary sanding. <p>The Oval car sander set contains the ergonomic sander plus 8 abrasive sheets in four different grits.</p>	<p>Sanding system for car body and refinishing works as well as the sanding of body fillers. Also suitable for use on wood, metal and plastics.</p> 
		
DESCRIPTION Oval Car Sander Set 152 x 77 mm	CONTENT PC. Set with 8 abrasive sheets, assorted	ITEM CODE 6780240000
		BAR CODE 4081600
		BAR CODE 684087

Refill pack Oval Car Sander	Dronco 1-2-3-4 System	Hand sanding
		 
DESCRIPTION Refill pack Oval Car Sander 152 x 77 mm	CONTENT PC. 8 abrasive sheets, assorted	ITEM CODE 6780250000
		BAR CODE 4081600
		BAR CODE 684094

► Fibre discs for use on angle grinders

Derusting, deburring, removal. DRONCO fibre discs are excellent for all abrasive works. They stand out for their high removal rate and long lifetime. Suitable backing pads round off the program.

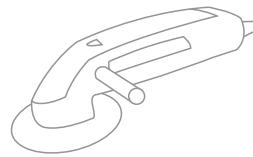


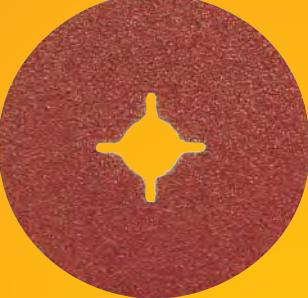
Fibre discs	perfect A	Angle grinder
	Abrasive disc with normal corundum for machine sanding of metals. Backing pad necessary!	Metal, cast and wood.
DESCRIPTION	DIMENSION MM	DIMENSION INCH
A 16 Fibre	115 x 22	4 1/2 x 7/8
A 16 Fibre	125 x 22	5 x 7/8
A 16 Fibre	180 x 22	7 x 7/8
A 24 Fibre	115 x 22	4 1/2 x 7/8
A 24 Fibre	125 x 22	5 x 7/8
A 24 Fibre	180 x 22	7 x 7/8
A 36 Fibre	115 x 22	4 1/2 x 7/8
A 36 Fibre	125 x 22	5 x 7/8
A 36 Fibre	180 x 22	7 x 7/8
A 40 Fibre	115 x 22	4 1/2 x 7/8
A 40 Fibre	125 x 22	5 x 7/8
A 40 Fibre	180 x 22	7 x 7/8
A 50 Fibre	115 x 22	4 1/2 x 7/8
A 50 Fibre	125 x 22	5 x 7/8
A 60 Fibre	115 x 22	4 1/2 x 7/8
A 60 Fibre	125 x 22	5 x 7/8
A 60 Fibre	180 x 22	7 x 7/8
A 80 Fibre	115 x 22	4 1/2 x 7/8
A 80 Fibre	125 x 22	5 x 7/8
A 80 Fibre	180 x 22	7 x 7/8
A 100 Fibre	115 x 22	4 1/2 x 7/8
A 100 Fibre	125 x 22	5 x 7/8
A 100 Fibre	180 x 22	7 x 7/8
A 120 Fibre	115 x 22	4 1/2 x 7/8
A 120 Fibre	125 x 22	5 x 7/8
A 120 Fibre	180 x 22	7 x 7/8
		ITEM CODE BAR CODE
		601100000000 4081600
		601008
		602005
		604009
		601015
		602012
		604016
		601039
		602036
		604030
		601046
		602043
		604047
		601053
		602050
		601060
		602067
		604061
		601077
		602074
		604078
		601084
		602081
		604085
		601091
		602098
		60109000
		604092

Backing pads can be found on page 130

FLEXIBLE AND SEMI-FLEXIBLE ABRASIVES

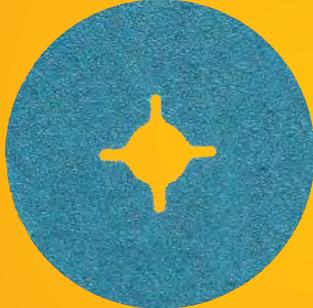

Fibre discs	special zirconium	Angle grinder
	<p>High performance fibre disc with zirconium corundum distinguishes through a very good lifetime and a high removal rate.</p> <p>Backing pad necessary!</p>	<p>Stainless steel and mild steel</p>
DESCRIPTION	DIMENSION MM	DIMENSION INCH
AZ 36 Fiber	125 x 22	5 x 7/8
AZ 50 Fiber	125 x 22	5 x 7/8
AZ 60 Fiber	125 x 22	5 x 7/8
AZ 80 Fiber	125 x 22	5 x 7/8
ITEM CODE	BAR CODE 4081600	
6722333000	674859	
6722335000	674866	
6722336000	674873	
6722337000	674880	

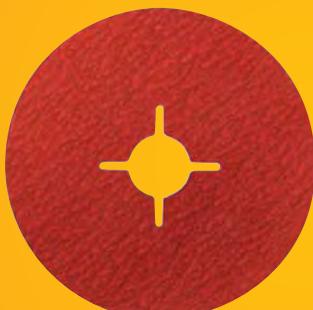Fibre disc AK	evolution ceramic	Angle grinder
	<p>Fibre disc with self-sharpening ceramic grain with special active components which endure aggressive stock removal with a high life time.</p> <p>A backing pad must always be used in conjunction with this product.</p> <ul style="list-style-type: none"> ◉ aggressive stock removal ◉ high service life ◉ self-sharpening 	<p>For surface grinding on chromium steel, chromium-nickel steel, high alloyed steel, titanium alloyed steel, brass and bronze.</p>
DESCRIPTION	DIMENSION MM	DIMENSION INCH
AK 36+ Fibre	115 x 22,23	4 1/2 x 7/8
AK 36+ Fibre	125 x 22,23	5 x 7 / 8
AK 60 Fibre	115 x 22,23	4 1/2 x 7/8
AK 60 Fibre	125 x 22,23	5 x 7 / 8
AK 80 Fibre	115 x 22,23	4 1/2 x 7/8
AK 80 Fibre	125 x 22,23	5 x 7 / 8
ITEM CODE	BAR CODE 4081600	
6011814000	601718	
6012814000	602715	
6011816000	601732	
6012816000	602739	
6011817000	601749	
6012817000	602746	


Backing pads can be found on page 130

▷ Semi-flexible discs for use on angle grinders

Because of the special disc build-up of the Semi-flexible discs a higher grade of removal is reached than with fibre discs, however with a coarser finish. They are available with normal corundum and silicon carbide.

Attention: A backing pad is necessary.

Speciality: Description SC 24 is also used for care of hoofs.

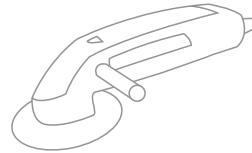

Semi-flexible discs	perfect SIC	Angle grinder
	Additive coated disc with silicon carbide. Backing pad necessary!	Grinding of stone, mild steel and stainless steel, aluminium and plastic, care of hoofs (SC 24).
<hr/>		
DESCRIPTION	DIMENSION MM	DIMENSION INCH
SC 16	115 x 22	4 1/2 x 7/8
SC 16	125 x 22	5 x 7/8
SC 16	180 x 22	7 x 7/8
SC 24	115 x 22	4 1/2 x 7/8
SC 24	125 x 22	5 x 7/8
SC 24	180 x 22	7 x 7/8
SC 36	115 x 22	4 1/2 x 7/8
SC 36	125 x 22	5 x 7/8
SC 36	180 x 22	7 x 7/8
SC 40	115 x 22	4 1/2 x 7/8
SC 40	125 x 22	5 x 7/8
SC 40	180 x 22	7 x 7/8
SC 60	115 x 22	4 1/2 x 7/8
SC 60	125 x 22	5 x 7/8
SC 60	180 x 22	7 x 7/8
SC 80	115 x 22	4 1/2 x 7/8
SC 80	125 x 22	5 x 7/8
SC 80	180 x 22	7 x 7/8
<hr/>		


Backing pads can be found on page 130

FLEXIBLE AND SEMI-FLEXIBLE ABRASIVES



Backing pads for use on angle grinders

For fibre discs and semi-flexible discs. The backing pad by DRONCO takes care of the proper support on the machine. Best possible working conditions and efficient, fast working are thus guaranteed.

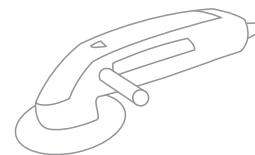

Backing pad



Angle grinder

Safety when using fibre and semi-flexible discs. Good scratch pattern due to damping and flexibility of the backing pad.

DESCRIPTION	DIMENSION MM	DIMENSION INCH	CONTENT PIECES	ITEM CODE	BAR CODE 4081600
M14 with velcro	115	4 1/2	1	6211205000	621020
M14 with velcro	125	5	1	6212205000	622027
M14 with velcro	180	7	1	6218205000	624021
M10 without velcro	115	4 1/2	1	6211100000	621013
M14 without velcro	115	4 1/2	1	6211105000	621006
M14 without velcro	125	5	1	6212105000	622003
M14 without velcro	180	7	1	6218105000	624007

Backing pad ribbed



Angle grinder

High performance backing pad with radial ribs.
Medium hard rubber for an aggressive material removal.

DESCRIPTION	DIMENSION MM	DIMENSION INCH	CONTENT PIECES	ITEM CODE	BAR CODE 4081600
M14 ribbed	115	4 1/2	1	6211110000	621099
M14 ribbed	125	5	1	6212110000	622096
M14 ribbed	180	7	1	6218110000	624090

► Economy rolls for hand sanding

Economy rolls are the ideal professional tool for hand sanding. Applications range from working of wood to grinding of metal. The very flexible cotton cloth can quickly be torn off and is delivered in a practical dispenser. The product is user-friendly and available in different lengths, widths and grit sizes.

Perfect - brown	Economy rolls	Hand sanding	
	<p>Very high quality resin bond universal abrasive belt for hand sanding, delivered in a practical dispenser, especially suited for metal and stainless steel. Flexible, lengths easy to tear off cotton cloth.</p> <p>Can be delivered in two lengths: 25 m, 50 m</p> <p>Backing material: J-cotton cloth, very flexible</p> <p>Grit: normal corundum Coating: close Bond: resin bond</p>		Metal, stainless steel
<hr/>			
DIMENSION MM	GRIT SIZE	CONTENT PIECES	ITEM CODE
50mm x 50m	60	1 roll	6790073000
50mm x 50m	80	1 roll	6790074000
50mm x 50m	120	1 roll	6790075000
50mm x 50m	180	1 roll	6790076000
50mm x 50m	240	1 roll	6790077000



▼ Grinding cups

The high removal rate of these conical abrasives makes them the ideal solution for coarse grinding work. The maximum operating speed should not exceed 45 m/s.

Examples of possible applications:

- **cleaning of shutter boards**
- **grinding away concrete ridges after the removal of the formwork**
- **coarse grinding work in the metal-working industry**

PLEASE NOTE

Max. R.P.M. 8500 - 50 m/s

Grinding cups metal



Suitable for all angle-grinders. Available in fine, medium, coarse.

Coarse grinding work on metal. The slight angle of the grinding cup also allows to work on welding seams.

DESCRIPTION	STRUCTURE	DIMENSION MM	CONTENT PIECES	ITEM CODE	BARCODE 4081600
AS 16 Q	Coarse	110/90 x 55 x 22,23	1	6311000000	631005
AS 24 Q	Medium	110/90 x 55 x 22,23	1	6311001000	631012
AS 36 Q	Fine	110/90 x 55 x 22,23	1	6311003000	631036

Grinding cups stone



Suitable for all angle-grinders. To grind the surfaces of natural and synthetic stones with a high removal rate. Available in very fine, fine, medium, coarse

| Working on all types of stone

DESCRIPTION	STRUCTURE	DIMENSION MM	CONTENT PIECES	ITEM CODE	BARCODE 4081600
CS 16 N	Coarse	110/90 x 55 x 22,23	1	6311010000	631050
CS 24 N	Medium	110/90 x 55 x 22,23	1	6311011000	631029
CS 60 N	Fine	110/90 x 55 x 22,23	1	6311016000	631074
CS 120 N	Very Fine	110/90 x 55 x 22,23	1	6311019000	631081

Available also with M14.

► Vitrified wheels

DRONCO have developed vitrified wheels for the use on bench grinders. They are supplied with a bore size of 32mm and an already inserted reducing bush from 32mm down to 20mm.

Vitrified wheels					
DESCRIPTION	STRUCTURE	DIMENSION MM	CONTENT PIECES	ITEM CODE	BARCODE 4081600
NK 24	Coarse	150 x 20 x 32/20	1	6561500000	656039
NK 24	Coarse	175 x 20 x 32/20	1	6561700000	656060
NK 24	Coarse	200 x 20 x 32/20	1	6562000000	656091
NK 60	Medium	175 x 20 x 32/20	1	6561710000	656077
NK 60	Medium	200 x 20 x 32/20	1	6562010000	656114
SIC 80	Fine	150 x 20 x 32/20	1	6561520000	656053
SIC 80	Fine	175 x 20 x 32/20	1	6561720000	656084
SIC 80	Fine	200 x 20 x 32/20	1	6562020000	656107





► Promotion box technical brushes with fast moving items

► Promotion box for drilling machines



► Promotion box „Profi“ for angle grinders



PROMOTION BOX CONTAINING TECHNICAL BRUSHES

Technical brushes packed in attractive, self-explanatory promotion box. Available are boxes for the use on drilling machines or type "PROFI" for the use on angle grinders. Mixed contents description as below:

Pure sales success - for product shelves and sales counter, P.O.S.

Content promotion box for drilling machines, 54 pieces

12 x Lend brush PBW 6	$\varnothing 25 \times 6,0 \times 0,30$ mm
6 x Wheel brush RB 6	$\varnothing 100 \times 6,0 \times 0,30$ mm
20 x Wheel brush RB 6	$\varnothing 75 \times 6,0 \times 0,30$ mm
10 x Cup brush TB 6	$\varnothing 50 \times 6,0 \times 0,30$ mm
6 x Cup brush TB 6	$\varnothing 75 \times 6,0 \times 0,30$ mm

Content promotion box PROFI for angle grinders, 36 pieces

5 x Tapered brush KBZ	$\varnothing 100 \text{ mm} \times M14 \times 0,5 \text{ mm}$
5 x Tapered brush KBW	$\varnothing 100 \text{ mm} \times M14 \times 0,3 \text{ mm}$
7 x Wheel brush RBZ	$\varnothing 115 \times 22,23 \text{ mm} \times 0,5 \text{ mm}$
7 x Wheel brush RBZ	$\varnothing 125 \times 22,23 \text{ mm} \times 0,5 \text{ mm}$
6 x Cup brush TBZ	$\varnothing 65 \text{ mm} \times M14 \times 0,5 \text{ mm}$
6 x Cup brush TBW	$\varnothing 60 \text{ mm} \times M14 \times 0,3 \text{ mm}$

Z= twist-knotted wire
W= crimped wire

DESCRIPTION

ITEM CODE

BAR CODE
4081600

Brush promotion box for Drilling machines

6903017100

707182

Brush promotion box for angle grinders

6903018100

707199

Index

A

A4	108
A4 Asphalt	109
A4 M	109
A 24 R	35
A 30 S	42
A 30 T	56
A 46 R	26
A 60 R 1 mm	23
ACS 46/60 T MULTI 1,2 mm	31
AK 24 V CeraMaxx	59
AK 36 T CeraMaxx	59
AK 46 V CeraMaxx	30
AK 60 V CeraMaxx	30
Application chart diamond cup grinders	115
Application chart diamond discs	94-95
Application chart flap discs	65
Application chart grinding discs metal	55
Application chart metal cutting discs	21
Application chart grinding discs stone	55
Application chart stone cutting discs	47
AS 24 R BAHN	40
AS 24 S Cast/Iron	60
AS 24/30 T	57
AS 30 R	56
AS 30 S HT	37
AS 30 S INOX	34
AS 30 S INOX	57
AS 30 S	36
AS 30 S	42
AS 30 T	34
AS 30 T INOX	58
AS 30 T	37
AS 30 V	38
AS 36 S INOX	43
AS 36 T	43
AS 36 V	38
AS 46 / AS 30 T INOX Cut+Grind	33
AS 46 / AS 60 T INOX FreeCut	32
AS 46 ALU	60
AS 46 T INOX	27
AS 46 T Mini grinding discs	61

AS 46 T Mini cutting discs

41

AS 46 V

28

AS 60 T INOX 1 mm

23-24

AS 60 V 1 mm

25

AS 60 W 0,8 mm

22

AS 60 W HT

26

AZ 30 S

58

AZ 30 T

58

B

B4

106

B5

107

Backing pad

129

Backing pad ribbed

129

BKT EVO Abrasiv

114

BKT EVO Beton

114

C

C 24 R

50

C 46 R

49

C 60 R

48

CERADRILL Diamond Tile Drill

110

CERADRILL DRY Diamond Dry Drill

112

CERADRILL-SET

111

Coarse cleaning fleeces for straight and cylindrical grinders

83

Coarse cleaning fleeces for the use on angle-grinders

82

Coarse cleaning fleece set

82

CS 24 R

51

CS 30 asphalt/ductile

51

CS 30 S

61

CS 46 ALU

39

CS 60 ALU

39

D

DB 4

98

Dealer Information

12-17

DRONCO GmbH

4-17

DST 56

116

DST 76

116

DST BLUE SPEED

117

DST SPEED

117

DST TURBO

117

DST

116

E

Evolution ceramic, Fibre Disc AK

127

INDEX

F	S
F3	103
F4 cera	104
F5 cera speed	105
G	S
G-A	66
G-AK	72
G-AZ A	67
G-AZ	70
G-AZ Maxx	71
G-C	74
G4	108
Gloss Polishing flap disc for angle-grinders	80
Grinding cups metal	131
Grinding cups stone	131
H	T
Hexagon Sander Set	122
J	Tensioning shaft
J-AK	73
J-AZ A	69
K	Tensioning shaft for mini cutting discs
K-AZ A	68
M	U
Mini Car Sander Set	124
Mini Sander Set	121
O	U3
Oval Car Sander Set	125
P	U4
perfect A Fibre Disc	126
Perfect SIC semi-flexible disc	128
Polishing compound	80
Polishing flap disc for angle-grinders	77
Polishing flap disc set	77
Polishing System, 10 pcs.	81
Polishing wheel	79
Promotion Box containing technical brushes	133
R	V
Refill pack Hexagon Sander	122
Refill pack Mini Sander	121
Refill pack Oval Car Sander	125



OSBORN PREMIUM PROGRAMME

2017



FINISH WITH OSBORN.

OSBORN WORLDWIDE



SALES OFFICES IN
23
COUNTRIES

MORE THAN
2.000
EMPLOYEES
WORLDWIDE

**CONVINCING
FIGURES**

KNOW-HOW FOR
MORE THAN
125
YEARS

SERVICE IN
120
COUNTRIES

SUBSIDIARIES IN
13
COUNTRIES

YOUR FIRST CHOICE FOR ALL SURFACES

BRUSHES

14

Dear customers,

you can look at it whatever way you want ...

On approximately 300 pages our new catalogue presents the range of products for mechanical surface treatment from Osborn and Dronco. No matter if you are looking to cut, grind, sand, clean, brush or polish – we are at your service.



We are Osborn and Dronco. With a combined experience of more than 180 years in surface treatment we do have a solution for nearly everything. And in case we don't have it yet, we develop it together with you. This is our strength: We already have 10,000 solutions for standard applications on stock. In addition we have developed more than 100,000 tailored solutions for our customers. And we also gladly assist you in finding the right product.

If today you are only an Osborn customer, we invite you to getting to know the other part of us. Just turn the catalogue around and see what Dronco has to offer. And the great thing is: You don't need another customer ident number or an additional contact person. Just speak to your already known contact and order products on you already existing customer account. Give it a try.

We are looking forward to our further cooperation!

Your experts in surface treatment,
Osborn International GmbH

HAND BRUSHES

73

POLISHING /
SATINISING

87

BRUSHTECHNOLOGY
INDUSTRIAL

107

DRONCO®
Because experts set the standard

→ Find the Dronco products starting at PDF-page 3.

HEAVY-DUTY
IDLER-ROLLERS

139

SPECIALS

141

INDEX 149

BEST SERVICE AT ALL LEVELS



Service means just that - serving.

It's not just a matter of dependable ordering, attractive conditions and fast delivery. We have that already, of course. **We offer our customers a 100% service.**

Therefore service at Osborn starts very early on.

Good service starts with a good product.

A good tool just feels right and fits 100% to the machine you are using. That's why we place great value on the ergonomics and handling of our products. Osborn tools are designed to suit all common machines and are also tested thoroughly on them.

Good service for us means developing products that make your work easier.



In our R&D lab, we use latest technology to achieve maximum ease of use and safety.

Tailored solutions for you.

We develop products that perfectly suit the needs and demands of our customers. It doesn't matter whether they're from our huge standard range or the result of a customer-specific solution developed jointly with you.

Our aim is to always make the user's work easier.



Our packaging as our best salesman.

A lot of information has to be taken in and considered at the self-service shelf and on the packaging. We favour clear messages, easily understood self-explanatory information. Well designed packages can help customers to find the right product and save consultation time on the dealer's part.





No matter when or where, you can place your order and we see to a timely delivery.

24/7 availability, worldwide.

Quick response and delivery times are a fundamental element of a modern service/customer relationship.

For you as a dealer, this is the basis for a good and profitable business partnership. In addition things must also be easy and reliable.

nexMart offers its dealers the convenience of an online order platform and is available in many European countries for some time now.

The screenshot shows the 'nexMart - Language Select' page. At the top right is the 'nexMart Simply eBusiness' logo. Below it is a section titled 'Bienvenue ! Welkom! Welcome! Willkommen!' followed by a multi-language welcome message. A grid of flags and language names for various countries is displayed, including Deutschland (Deutsch), Österreich (Österreich), Schweiz (Schweiz), International (English, Deutsch, Français, Italiano), Belgique (Nederlandse, Francese), Nederland (Nederland), France (France, Francese), España (España), República Portuguesa (Português), and Lëtzebuerg (Français). To the right is a 3D globe icon.

nexMart



nexMart – easy ordering around the clock.

The nexMart Internet platform is the biggest information source in the industry and allows convenient, digital ordering with full order functionality – whenever and wherever you need it.

"OSBORN SOLUTIONS" @ YOUTUBE



Comprehensive product and application information, tips and suggested solutions for a professional surface treatment – available 24/7 on our YouTube channel.



The official Osborn YouTube channel.

Scan QR-Code or use the following link to get there:
youtube.com/osbornsolutions

The screenshot shows the YouTube channel page for 'Osborn - Surface Treatment & Finishing Solutions'. The channel has over 100,000 subscribers. The 'Videos' tab is selected, showing a grid of video thumbnails with titles such as 'Broonate - Professional Cleaning Solutions', 'Osborn - The BrushBrite', 'Manuelle Schleifen - Osborn Anwendungsvideo - Manual...', 'Veredlung von Türrandschlägen - Osborn Anwendungsvideo', 'Brennen von Türgittern mit Vierschleifen', 'Automatisches Schleifen mit UpBrush', 'Alublock polieren - Osborn Anwendungsvideo / Polishin...', 'Metall polieren - Osborn Anwendungsvideo / Polishin...', 'Motorräder entgraten - Osborn Anwendungsvideo / Deut... ', 'Kupferrohr polieren - Osborn Anwendungsvideo / Buffing...', 'Frost-Test - About Osborn - Herstellung von Polymers...', 'Frost-Test - Osborn solutions and qualities', 'Osborn LONGLIFE Duo Brush', 'Osborn Teflonite LONGLIFE', 'Osborn Emuls Schneid Ölfilter', and 'Osborn Kreis Seime Verkäuferseit'. The channel also features playlists like 'Anwendungsvideos' and 'Kontakt'.

A QUESTION OF SAFETY



Work safety – a key issue for users and dealers.

That's why Osborn takes the subject very seriously. Users and dealers are safe with us because many **Osborn tools** are **TÜV-certified**. This means safety is not only perceivable but also measurable.

Safety with a seal. More than 700 Osborn products are TÜV-certified.

Osborn quality is not just a promise but is signed and sealed. More than 700 of our products have been certified by TÜV-Süd. This makes Osborn products the only ones on the market to meet the highest standards of quality and safety.

Our quality standard: to always have the best tool for every job.

That is why we combine top-quality raw materials, years of experience, high-precision manufacturing methods so our customers can rely on Osborn.



One of more than 700 certified Osborn products.



Osborn: Officially good!

A TÜV-seal means „tested without compromise“ and indicates quality at the first glance.

Osborn is the only manufacturer in its sector to obtain this certification.





Visible quality.

The TÜV-seal on the packaging catches the eye immediately. Clearly visible on the shelf, the seal tells consumers immediately that Osborn quality has gained official confirmation.

Unique tool. Repeated testing.

All products undergo a wide variety of tests for TÜV-Süd certification.

In addition to these checks, all our products are subjected to our own comprehensive tests in order to guarantee the Osborn quality standard.

Our customers benefit time and again from double quality testing which ensures consistently high standards in terms of materials, finish and safety.



Certified quality - compliance with all standards.

In addition to meeting the demands for the TÜV-Süd certification, our products are also manufactured in accordance with EC standards EN 1083-1 and EN 1083-2. We also hold the DIN EN ISO 9001:2015 certification and have implemented into this an energymangement system according to ISO 50001:2011.

You can find our certificates on our website at:
www.osborn.de/de-de/service/zertifikate.html



With its TÜV certification, Osborn promises more than just a quality commitment. Osborn products have proven they perform as promised. Under all conditions.

This clearly makes Osborn the first choice when it comes to superbly manufactured tools of unbeatable quality.

YOUR ADVANTAGE EXKLUSIVELY WITH OSBORN

MAXIMUM QUALITY



First class tools – better results and satisfied customers.

As longtime expert in mechanical surface treatment solutions we know, what makes a good tool: High performance, efficiency and safety. Osborn professional tools are the result of this pursuit. One example unifying all these factors is the Osborn LONGLIFE brush with its special filament.

Osborn Tools – First Choice in Quality.

Osborn LONGLIFE – Performance Champion.

Min. 5-times less wire
breakage and wear

Material friendly and
non-stock removing


Available in
Ø 60, 75, 80, 100 mm

Best of both worlds.

Extremely long lasting cup brush with
LONGLIFE-filaments for a fine, satinised
surface finish. Ideal for descaling and
cleaning of larger surfaces.

**High performance of a knotted brush
yet as material friendly as a crimped
wire brush.**

LONGLIFE in detail:

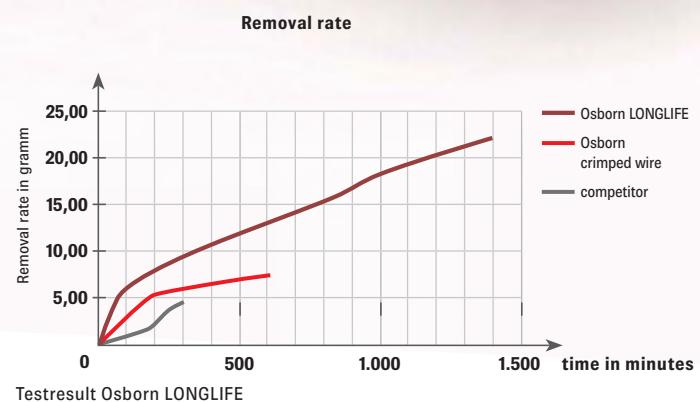

QUALITY & PERFORMANCE TESTS: TEST-ROBOT



Test robot in our R&D lab in Burgwald

YouTube



The test robot at work.

The QR code will take you directly to the film clip or use the address below to visit our YouTube channel.

Watch the video on YouTube:

[YouTube.com/osbornsolutions](https://www.youtube.com/osbornsolutions)

Accurate testing without compromise.

At Osborn, we use a state-of-the-art industrial robot to determine the performance of our products. The robot delivers accurate results and makes it possible to carry out a wide range of quality assurance checks, all under the same conditions.

As well as providing pure performance data, the robot helps us through continuous monitoring to guarantee a consistent quality standard. Complex processes are easily replicated using realistic simulations to optimise the tool.

Our Qualitylines

All our products are manufactured with greatest care in order to meet your demands and requirements in the best way.

For your orientation, we have especially categorized the machinebrushes for angle grinder, power drill and high-speed as well as the handbrushes into three productlines: From solid DIY-quality to high-end products for demanding industrial applications. Just look out for the productline being mentioned directly next to the product image.

PERFECT

Products in solid DIY-quality.

SPECIAL

High-performance products in industrial quality.

Nearly the whole range is TÜV-Süd certified.

EVOLUTION

High-end products with highest quality materials for demanding industrial applications and long service-life.

Wheel Brushes

knotted wire



SPECIAL



Info on qualityline directly with the product image

FASTER TO THE RIGHT PRODUCT

The best advice. On the packaging.

Osborn packaging makes it easy to find the right product.

In just **four quick steps** you can find the perfect tool from our wide range of brushes and other products. Clearly displayed on our POS materials are the four, selfexplanatory steps you need to obtain expert advice.


1. Easy selection:

Icons on the packaging tell you which machine to be used.
Angle grinders, power drills, or high-speed drill – this question is quickly answered.



3. Detailed info on the product:

The details about the product provide information on wire, bore/thread, rounds per minute, etc.

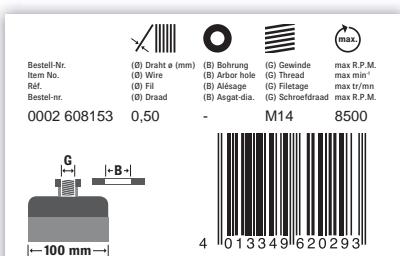

2. Quick info on trim materials:

Here, colours and text provide users with key information on the trim material. The colours also appear in the catalogue to help with material selection.



4. TÜV-Safety

TÜV-Süd seal on the package means: This article is certified.



SCAN INFORM DECIDE

Inform online – decide at the shelf.

Osborn links the shelf to the Internet. Customers have the option of loading additional details and product information directly onto their Smartphone, using the QR codes on our packaging. It is so easy to clear up questions about our products right there at the shelf.

The QR codes are located on our individual packaging, on loose products in boxes and on the display card.



Code on the packaging and the web at the POS.



1. QR-Code on shaft-tags.



2. QR-Code on packaging.



3. QR-Code on display cards.



YOUR OSBORN- ADVANTAGE

Efficient advice

The QR-code can be a great source of advice as it allows the salesperson to access videos, pictures and information on the selected product quickly at the POS.

INTELLIGENTLY PACKAGED & PRESENTED

Osborn products come in different kinds of packaging, with each version explaining and promoting the product to the full.

1. Box / individual packaging



2. Display card

Users can immediately see which machine is to be used with the brush.



3. Shaft-tag in assortment box

Shaft-tags provide basic information like EAN code. The header board of the box can be used front and backside (for wood or metal brushes). The box can be used length or crossways.



4. Flexibility

Presenting the products professionally:
With the help of our packaging, you can compile your individual sales walls.

Contact us for more details.

(Pictures show a sample configuration)

Product overview

Find your tool quickly



BRUSHES

14

Osborn brushes – first class tools for every application

Brushes for angle grinders

Cleaning, non-stock removing and efficient



Brushes for power drills

For power drills of all makes



Brushes for high-speed drills

Ideal tools for high-speed machines



Finishing Drums for Satinisers

Drums for the perfect surface pattern



HAND BRUSHES

73

Osborn hand brushes, brooms and paint brushes – ideal for all manual jobs

Basic deburring, cleaning, descaling and paint stripping

POLISHING /
SATINISING

87

Osborn surface technology – for the perfect finish

Your wide range of polishing tools

BRUSHTECHNOLOGY
INDUSTRIAL

107

Osborn Industrial – high performance for all industrial applications

Ideal solutions for your manufacturing process

HEAVY-DUTY
IDLER-ROLLERS

139

Osborn Load Runners – precise load control

Idler Rollers and rails for heavy duty applications

SPECIALS

141

Osborn Specials – versatile all-rounders

Strip brushes in many different configurations

INDEX

149

Brushes

Introduction & technical information

PRODUCT INTRODUCTION BRUSHES

Osborn brushes – first-class, brand-name tools for every application.

There are any number of tasks and applications for a brush. But it is not just the job that determines which brush to use. The tool used and the surface to be finished are equally important. To ensure you always have the best brush in each case, you should entrust your surfaces to a brand-name brush. This is the only way to guarantee that everything from trim material to brush shape is correct.

Overview of the most common machine brushes:



THE OSBORN- ADVANTAGE

Osborn has the right brush for every application.

As a professional partner to trade and industry, Osborn sells high-performance tools suitable for all applications throughout the world. You can rely on Osborn's many years of experience and skill.

Brushes

Introduction & technical information

Trim materials: the right material for every application

For our products, we only use trim materials that we have developed ourselves or which have been specifically selected. Constant laboratory tests ensure high material quality. Your Osborn tool is always perfectly suited to a certain type of brushing work. Our technical sales department will be pleased to advise you on the ideal trim material for your given application.




Steel wire, crimped

- Most common trim materials
- For flexible brushing tools
- Suitable for light surface treatment and deburring operations



Steel wire, cordwire (Longlife)

- Cordwire with high tensile strength
- Extremely long-lasting
- Combined advantages of crimped and knotted wire
- For light derusting operations



Steel wire, straight or knotted

- For extreme brushing requirements
- For brushing tools with less flexibility
- Ideal for cleaning weld seams and removing heavy deposits of scale or corrosion



Osborn special steel wire, crimped or knotted

- Heavy duty steel wire with high tensile strength
- High elongation and long brush life
- For extreme brushing demands




Stainless steel wire, crimped, straight or knotted

- Most commonly used alloys: 1.4310 and 1.4401 (1.4571 available on request)
- For use where residue from normal steel wire would contaminate surfaces.



Brass wire

- Surface finishing on non-ferrous materials (copper and brass)




Brass-coated steel wire, mono wire

- Single wires
- High tensile strength
- For demanding brushing and deburring operations



Novoflex-B

- Abrasive spheres on a flexible structure
- Self-centring
- Creation of surfaces with a high contact ratio (plateau finish)



Brass-coated steel wire, cordwire

- Cordwire with high tensile strength
- For demanding brushing and deburring operations, as well as for structuring wood



Tampico fibre

- Pure plant fibre
- For wet and dry cleaning operations
- Heat-resistant
- In combination with compound also suitable for polishing



Horse hair

- Animal hair
- For light cleaning operations
- Suitable for sealing



Synthetic filaments

- Highly flexible
- Resistant to weak acids and alkaline solutions
- Wear resistant



Abrasive filament, aluminium oxide

- Nylon filaments impregnated with abrasive grit
- Light deburring of steel and non-ferrous metals



Abrasive filament, silicon carbide

- Nylon filaments impregnated with silicon carbide
- Uniform performance as new abrasive particles come to the surface
- High elasticity with no danger of breakage
- Long brush life
- For deburring/descaling, roughening and grinding



Novofil

- High-performance, high-tech material
- Flat or round filaments
- Broad range of materials, different degrees of hardness
- For deburring and internal finishing



Please also note our different qualitylines for products.
You will find the definition in our chapter BRUSHES directly with the product image.

PERFECT Products in solid DIY-quality.

SPECIAL High-performance products in industrial quality.
Nearly the whole range is TÜV-Süd certified.

EVOLUTION High-end products with highest quality materials for demanding industrial applications and long service-life.

Brush trim and material suitability

The trim material determines the suitability of the selected brush for the surface to be finished.

A quick overview of the suitability of your brush can be found in the trim and material charts in the info headings on the product pages.

TRIM AND MATERIAL

Simple equation: the right trim for the material being finished.

Product available with:


	Steel	Cast iron	Stainless steel	Non-ferrous metal	Aluminum	Softwood	Hardwood
steel wire, crimped	■	■					
steel wire, stainless			■	■	■		
brass wire	■			■		■	■

Brushes

Introduction & technical information

Easy identification of the best trim material.

The correct choice of trim material is very important in obtaining the best surface finish, because the desired result will only be achieved by correctly matching the trim to the surface material being finished. The illustration below clearly explains the relationships involved in each stage of the process.

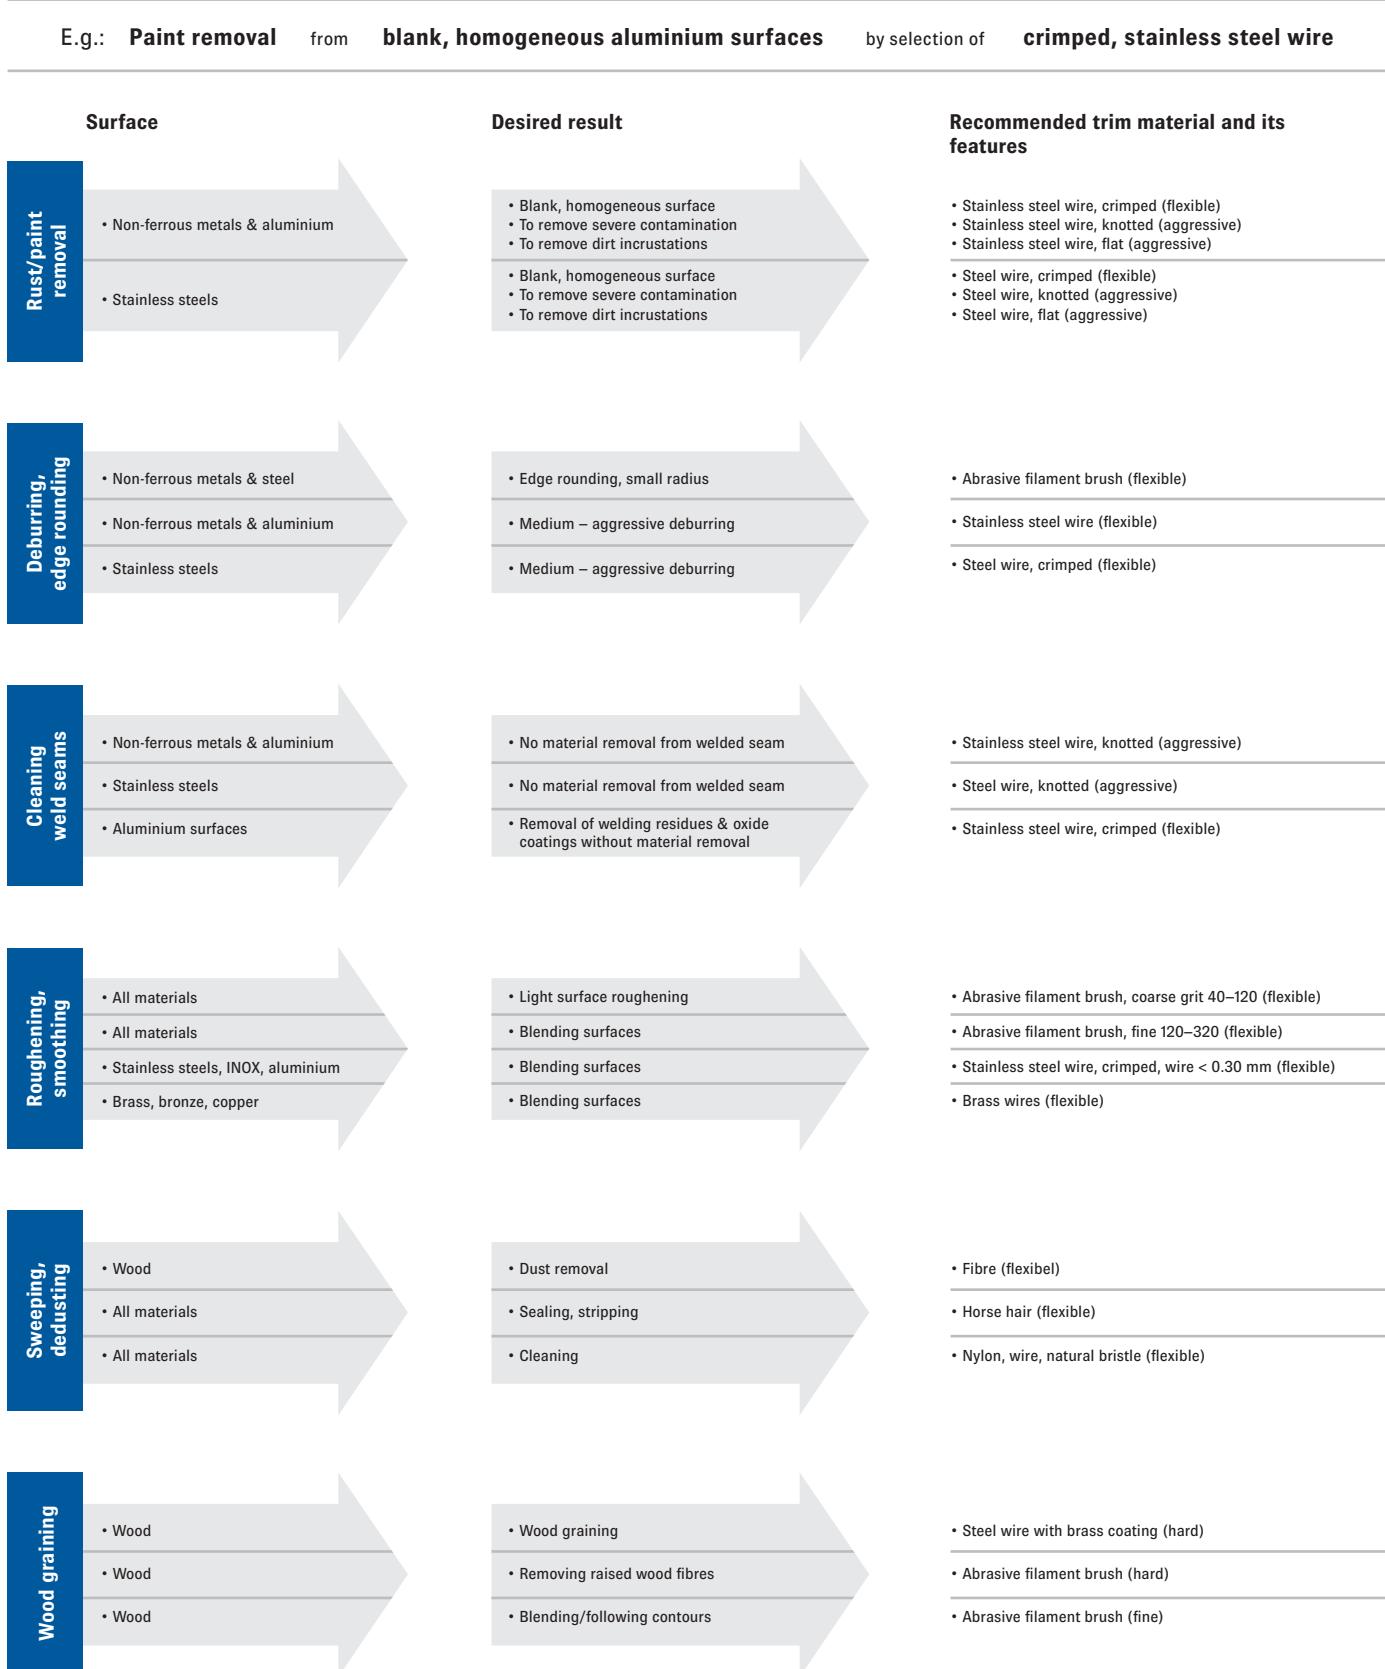

TECHNICAL INFORMATION



Safe and operating speeds

The workplace safety regulations require the maximum safe speed to be observed. Details can be found in the product overview in this catalogue, on the packaging and on the brush itself (see fig.).

The definition of operating speed is based on the peripheral speed and brush diameter.

The ideal operating speed is generally significantly lower than the safe speed.



Operating and clamping width of the brush

The **operating width** describes the contact surface between brush and workpiece.

Press the trim together slightly to measure the operating width.

The **clamping width** is measured between the washers (see fig. left).

Contact us for more information on the clamping width.



Brush diameter and trim length

The relationship between the diameter of the brush (brush body) and the length of the trim determines how the brush operates. Generally speaking:

Soft, flexible brushes,
e.g. for finishing structured workpieces or
surface cleaning.



More aggressive brushing,
e.g. for deburring or removing
impurities.



Ideal position of brush in relation to workpiece

The contract pressure of a brush is defined by factors such as its insertion depth in the workpiece. Our recommendation is 3 times the filament diameter, e.g. 1.0 mm insertion depth for a wire thickness of 0.35 mm.

The ideal position also ensures less wear.

Our application engineers will be glad to advise.



Brush trim density

The trim density is determined by the number of wire tips per surface unit.

High trim densities are best for cutting performance and service life (e.g. deburring).

Lower trim densities increase brush flexibility and are required for finishing intricately shaped surfaces.

ANY QUESTIONS? We will be glad to help: service@osborn.de

Brushes

Introduction & technical information



Important safety instructions

For **efficient and safe use**, always choose the maximum possible brush diameter that can be fitted to the grinder.

As mentioned in the section on operating speeds, the brush diameter defines the **peripheral speed**. It can also affect brush performance.

The table below provides a summary.

Installation instructions

Please read before fitting the brush.

- The speed of the drive shaft on your machine should not exceed the maximum safe speed of the brush.
- The length of the shaft should be sufficient to ensure a firm fit in the chuck.
- Brushes with a clamping shank can be installed without problems in standard drill chucks or collets.
- The connecting threads on the brushes have flats for simple installation and removal.

rpm ⁻¹	Brush diameter in mm											
	20	40	50	80	100	125	150	180	200	250	300	350
800				3,35	4,19	5,23	6,28	7,53	8,37	10,47	12,56	14,75
900			2,35	3,77	4,71	5,88	7,06	8,48	9,41	11,77	14,12	16,47
1.150			3,01	4,81	6,01	7,52	9,02	10,83	12,03	15,04	18,04	21,04
1.200	1,25	2,51	3,14	5,02	6,28	7,85	9,41	11,30	12,55	15,69	18,83	21,97
1.400	1,46	2,93	3,66	5,86	7,32	9,15	10,98	13,18	14,64	18,31	21,97	25,63
1.500	1,57	3,14	3,92	6,28	7,85	9,81	11,77	14,13	15,69	19,61	23,54	27,46
1.800	1,88	3,77	4,71	7,54	9,41	11,77	14,12	16,95	18,83	23,54	28,24	32,95
2.000	2,09	4,19	5,23	8,37	10,26	13,08	15,69	18,84	20,92	26,15	31,38	36,61
2.500	2,62	5,23	6,54	10,47	13,08	16,35	19,61	23,55	26,15	32,67	39,23	45,76
2.800	2,93	5,86	7,32	11,72	14,64	18,31	21,97	26,37	29,29	36,61	43,93	51,25
3.000	3,14	6,28	7,85	12,56	15,69	19,62	23,54	28,26	31,38	39,23	47,07	54,92
3.200	3,35	6,70	8,37	13,40	16,74	20,92	25,10	30,14	33,47	41,84	50,12	58,58
3.500	3,66	7,33	9,15	14,65	18,31	22,89	27,46	32,97	36,61	45,76	54,92	64,07
4.000	4,19	8,37	10,46	16,75	20,92	26,16	31,38	37,68	41,84	52,33	62,76	73,22
4.500	4,70	9,42	11,77	18,84	23,54	29,43	35,30	42,40	47,07	58,84	70,61	82,43
5.000	5,23	10,47	13,08	20,93	26,15	32,70	39,23	47,10	52,33	65,38	78,50	
5.400	5,65	11,30	14,12	22,94	28,24	35,31	42,36	50,67	56,48	70,61	84,78	
6.000	6,28	12,56	15,69	25,12	31,38	39,24	47,07	56,52	62,76	78,50		
7.000	7,33	14,66	18,31	29,31	36,61	45,78	54,92	65,94	73,22	91,58		
8.000	8,37	16,75	20,92	33,94	41,48	52,32	62,76	75,36	83,73			
9.000	9,42	18,84	23,54	37,68	47,07	58,86	70,61	84,78	94,20			
10.000	10,47	20,93	26,17	41,86	52,33	65,40	78,50	94,20				
12.500	13,08	26,17	32,71	52,33	65,42	81,75	98,13					
15.000	15,70	31,40	39,25	62,80								
17.500	18,32	36,63	45,79	73,26								
20.000	20,93	41,87	52,33	83,73								
22.500	23,55	47,10	58,88	94,20								
25.000	26,17	52,33	65,42	104,66								

Safe peripheral speeds:

Guide values for safe peripheral speeds are, for example, 30-35 m/sec. for brushes with crimped wire, and 18-22 m/sec. for brushes with abrasive filaments and synthetic compound trim materials.

Brushes with knotted wire should be used in angle grinders at max. 85 m/sec., and stationary machines at max. 45 m/sec.



Important:

Hand tools should only be fitted with brushes up to a max. OD of 180 mm.



General safety instructions

- Wear protective clothing to protect yourself from injury.
- More safety instructions and examples of usage can also be found on the Internet.



For more information*



* Network charges apply for the use of mobile websites.

www.osborn-app.com

Brushes

Angle grinder

BRUSHES



GENERAL INFORMATION 20

WHEEL BRUSHES 23

CUP BRUSHES 27

BEVEL BRUSHES 33

BRUSHES FOR CORDLESS POWER TOOLS 36



Brushes

Angle grinder



Important user information

Brushes for angle grinders



To be noted when selecting brushes and using angle grinders:

1. Typical brush types for angle grinders



Wheel brushes

Available with knotted and crimped wire as well as abrasive filaments.



Cup brushes

Available with knotted and crimped wire, as well as abrasive filaments.



Please note:

When deciding on a suitable diameter for a cup brush, do not forget that it will spread out during operation. The key factor in determining the maximum possible brush diameter is therefore the size of the safety guard.



Bevel brushes

Available with knotted and crimped wire.

2. Determining the operating speed

The maximum operating speed of a brush depends on its diameter. As in the case of a bicycle wheel, the larger it is the fewer turns are needed to cover a particular distance.

The most common speeds are colour-coded to clearly show the differences and for ease of identification:




Diameter:	Ø 115 mm (4 1/2")	Ø 125 mm (5")	Ø 150 mm (6")	Ø 180 mm (7")	Ø 230 mm (9")
Operating speed:	12.500 rpm	11.000 rpm	8.500 rpm	8.500 rpm	6.500 rpm

3. Which brush for which angle grinder?

Brush type & trim	Ø Brush											
	60	65	75	80	90	100	115	120	125	150	178	230
Wheel brush, knotted						115	115		125	150	180	230
Wheel brush, crimped						115	115					
Bevel brush, knotted						115	115		125			
Bevel brush, crimped						115	115					
Cup brush, knotted		115	125	150		180		230				
Cup brush, crimped	115		125	150		150 / 180			230	230		
Cup brush, abrasive						150*						

* adjustable



The machine information on the packaging

The machine icon on all Osborn packaging will also show the maximum permitted machine size.

PRODUCT FINDER

WELD SEAM CLEANING

Impurities or non-metallic inclusions can occur on the surface of the weld, depending on the welding procedure. Non-metallic inclusions do not adhere to the surface to the extent of the other materials in the weld. If a coating is later applied to the welded part, faults in the coating and corrosion can occur in the area of the inclusions.



The QR code will take you directly to the special page for welding with an easy to use online product finder.

Osborn can provide the appropriate cleaning tool for any welding procedure and type of seam to be finished (root, filler or cover). Brushes are the ideal solution because they do not grind the material, unlike commonly used grinding wheels.

Our weld matrix will help you select the right product for your application.

The most common contamination occurring during welding (in order of technique):



Slag

Residues that occur as the electrodes wear.

MMA

TIG/MIG/MAG

PLASMA

Spatter

Grinding wheels remove this residue.


Silicates

Silicates occur when silicon – present in most steel alloys – burns during the welding process and change to SiO₂.

Blue Colour

Oxide deposits that form mainly when welding stainless steel.

Root/ Hot pass					MMA	TIG/MIG/MAG	PLASMA
Fill layer							
Cap layer							
Surface							



Wall thickness	Round brush Ø
10 mm	-
15 mm	-
20 mm	-
25 mm	-
30 mm	-
35 mm	-



You can download a PDF containing a detailed matrix or use the online product finder. Just scan the QR code at the top or enter <http://weldcleaning.osborn.com>.

Brushes

Angle grinder



Important information

Material care


Wire brushes are not cutting tools. They remove residues such as slag, silicates and bluing but leave the original surface structure untouched.

That saves time and money!


Flying sparks

Flying sparks are a safety risk in confined spaces such as pipeline installation sites, especially if several people are working together.

Brushes generate 95 % less sparks than grinding wheels.

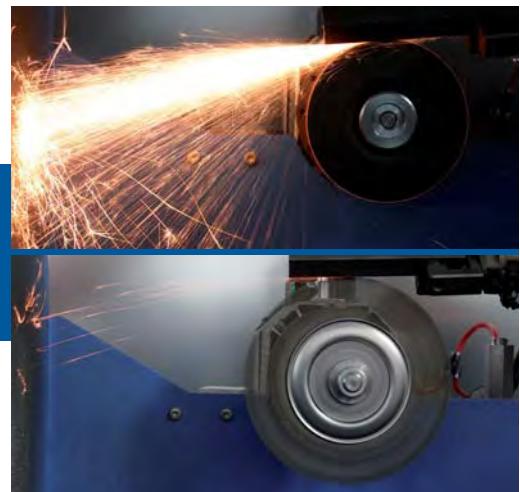

Noise level

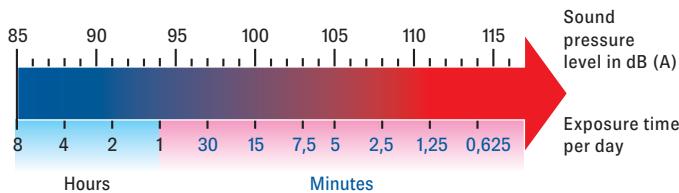


Sound pressure level and daily exposure times for maintaining a daily noise exposure level (Lex), 8 h of 85 dB(A) - upper value

Noise

Studies have shown that the noise level in the metal-working industry is one of the highest compared with other sectors. EU directives specify an average noise level of 85 dB (A) per day. Noise is one of the best known causes of illness.

Noise comparison

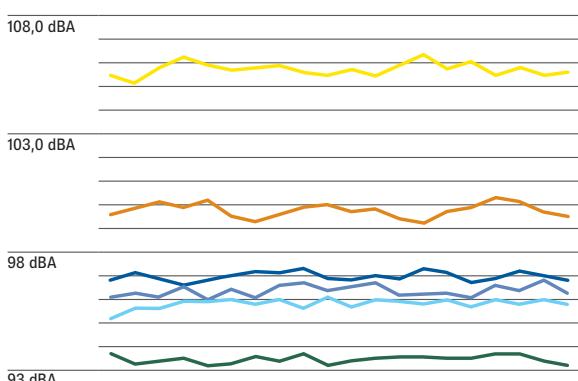

This diagram shows that wire brushes are an average 6–8 dB (A) quieter than grinding tools. This is a significant reduction and a contribution to occupational safety because a variation of just +/- 3 dB (A) is the equivalent of doubling/halving the noise level.


Brushes

Angle grinder

BRUSHES



Wheel brushes for easy installation on angle grinders; for deburring and cleaning weld seams. Industrial grade.

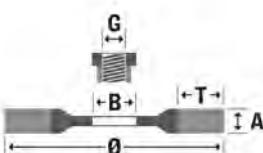


USAGE										TRIM AND MATERIAL					
roughening 0,26 deburring 0,35 edge honing 0,50 0,60 0,80 descaling/paint stripping 0,35 slag residue 0,50 silicates residue 0,50 blue color residue 0,50										Steel Cast steel Stainless steel Non-ferrous metal Aluminium Soft wood Hard wood					
115-230										Products available with:					
										Steel wire twist knot	Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium
										Stainless steel				Soft wood	Hard wood

Ø	A	T	B	G	Adapt.	rpm	pcs.	0,35		RRP	0,50		RRP	0,80		RRP
								Order-No.	€		Order-No.	€		Order-No.	€	
75	12	15	13			20000	12	0002-611 131			0002-611 151					
100	12	20	22,2		F	12500	8	0002-621 131			0002-621 151					
115	12	23	22,2		F	12500	10	0002-631 131			0002-631 151					
115	12	23		M14x2,0		12500	6	0402-631 131			0402-631 151					
115	6	19	22,2		F	12500	10	9502-626 301			9502-626 501					
125	13	28	22,2		F	12500	8	6152-631 131			2202-631 151					
125	13	28		M14x2,0		12500	8	1402-631 131			1402-631 151					
125	6	24	22,2		F	12500	8	9502-626 311			9502-626 251					
150	13	37	22,2		F	12000	5	0002-641 131			0002-641 151					
178	13	42	22,2		F	10000	6	0002-653 131			0002-653 151					
178	6	38	22,2		F	12000	12	4602-626 131			4306-026 904					
230	6	57	22,2		F	6500	1				9502-664 151					
230	13	58	22,2		F	8500	1									

Ø	A	T	B	G	Adapt.	rpm	pcs.	0,35		RRP	0,50		RRP	0,50 1.4401		RRP
								Order-No.	€		Order-No.	€		Order-No.	€	
100	12	20	22,2			12500	4				0002-621 351					
115	12	23	22,2		F	12500	4	0002-631 331			0002-631 351					
115	12	23	22,2		F	12500	4	0402-631 331			0402-631 351					4902-631 351 *
115	12	23		M14x2,0		12500	4	1402-631 331			1402-631 351					
125	6	24	22,2		F	12000	3	4602-626 331			9502-626 651					4902-626 651 *
125	13	28	22,2		F	12500	3	2202-631 331			2202-631 351					4912-631 351 *
125	13	28		M14x2,0		12500	3	1402-631 331			1402-631 351					
125	13	28				12500	3	0002-641 351			0002-653 351					
150	13	37	22,2		F	12000	3	0002-653 351								
178	13	42	22,2		F	10000	3									
178	13	42	22,2		F	10000	3									
178	6	38	22,2		F	12000	12	4612-626 331								4902-653 351 *

* TÜV-Certification planned.

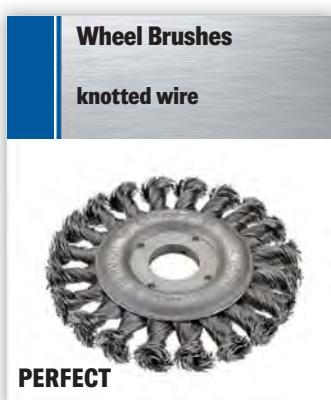

Wheel brushes for easy installation on angle grinders; for deburring and cleaning weld seams. Do-it-yourself version.

USAGE										TRIM AND MATERIAL					
roughening 0,26 planning 0,35 deburring 0,50 edge honing 0,60 structuring 0,80 descaling/paint stripping 0,80 weld seams 0,80										Steel Cast steel Stainless steel Non-ferrous metal Aluminium Soft wood Hard wood					
115-180								Products available with: Steel wire twist knot		Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Angle grinder

Wheel Brushes

knotted Osborn wire



EVOLUTION

115-180

USAGE

roughening	0.26
deburring	0.35
edge honing	0.50
descaling/paint stripping	0.60
slag residue	0.80
silicates residue	0.26
blue color residue	0.35

TRIM AND MATERIAL

Products available with:

Steel wire twist knot	Steel
Stainless steel	Cast steel
	Stainless steel
	Non-ferrous metal
	Aluminum
	Soft wood
	Hard wood

Ø	A	T	B	G	Adapt.	rpm	pcs.	Osborn 0,35	RRP	Osborn 0,50	RRP
75	13	17	1/2"		F	20000	12	9906-026 011		9906-026 012	
100	13	22	5/8"		F	18000	12	9906-026 116		9906-026 117	
100	13	22	7/8"		F	18000	12	9906-026 280		9906-026 281	
115	6	19	7/8"		F	12500	12			2906-026 501	
115	6	19		M14x2,0		12500	12	0002-626 305		0002-626 505	
125	6	24	7/8"		F	12500	12	0002-626 311		0002-626 251	

Wheel Brushes

knotted Osborn wire



EVOLUTION

115-180

USAGE

roughening	0.26
deburring	0.35
edge honing	0.50
descaling/paint stripping	0.60
slag residue	0.80
silicates residue	0.26
blue color residue	0.35


TRIM AND MATERIAL

Products available with:

Steel wire twist knot	Steel
Stainless steel	Cast steel
	Stainless steel
	Non-ferrous metal
	Aluminum
	Soft wood
	Hard wood

Ø	A	T	B	G	Adapt.	rpm	pcs.	Osborn 0,35	RRP	Osborn 0,50	RRP
115	6	19	7/8"		F	12500	12	0002-626 650			
125	6	24	7/8"		F	12500	12	0002-626 651			

Wheel brushes for easy installation on angle grinders; for deburring and cleaning weld seams. Special knotting and hardened wire for industrial applications and long service life.

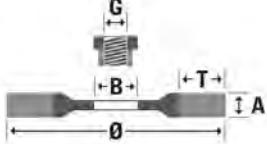

Brushes

Angle grinder


BRUSHES

Wheel Brushes

knotted wire



Brushes with special clockwise/anticlockwise knotting for smooth, vibrationfree use.

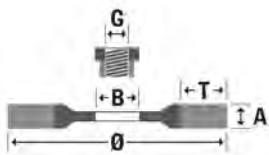

USAGE

115-180

roughening	0,26
deburring	0,35
edge honing	0,50
descaling/paint stripping	0,60
slag residue	0,80
silicates residue	
blue color residue	

TRIM AND MATERIAL

Products available with:

Steel wire twist knot →

Steel	Cast steel	Stainless steel	Non-ferrous metal
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Aluminium			
Soft wood			
Hard wood			

mm

max

mm

Ø	A	T	B	rpm	pcs.	0,35	RRP	0,50	RRP
						Order-No.	€	Order-No.	€
115	12	23	22,2	12500	10	1202-631 131		1202-631 151	
125	13	28	22,2	12500	8	1212-631 131		1212-631 151	
178	13	42	22,2	12500	6	1202-653 131		1202-653 151	

Wheel Brushes

**knotted Osborn wire
plasticbonded**



EVOLUTION

USAGE

125-180

roughening	0,26
deburring	0,35
edge honing	0,50
descaling/paint stripping	0,60
slag residue	0,80
silicates residue	
blue color residue	

TRIM AND MATERIAL

Products available with:

Steel wire twist knot →

Steel	Cast steel	Stainless steel	Non-ferrous metal
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

mm


max

mm

Ø	A	T	B	G	rpm	pcs.	Osborn 0,50	RRP	Osborn 0,50 *	RRP
							Order-No.	€	Order-No.	€
115	6	19	22,2		12000	10	5402-921 873			
125	6	24	22,2		8500	1	9802-921 873		9812-921 873	
178	6	38	22,2		8500	1	9802-921 875		9812-921 875	

Non-deforming brushes to remove slag and silicates. Suitable for root and filler welds. Recommended for MMA/manually welded joints with heavier deposits.

* pointed model. Other articles regular.

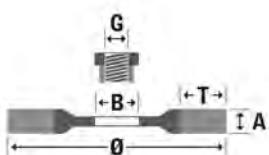


Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Angle grinder




Non-deforming brushes to remove silicate and welding residues. Recommended for joints welded using TIG/MIG/MAG. Slim type for narrow seams.

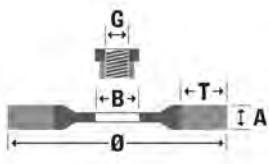

USAGE							TRIM AND MATERIAL								
Ø	A	T	B	G	rpm	pcs.	Order-No.	0,38		Order-No.	€	Order-No.	€	Order-No.	€
								Steel	Cast steel						
115	5	27		M14x2,0	12000	6	5402-921 051	<input type="checkbox"/>	<input checked="" type="checkbox"/>						
125	6	27		M14x2,0	12000	1	4102-921 051	<input type="checkbox"/>	<input checked="" type="checkbox"/>						
150	5	29	22,2		8500	12	0002-921 874	<input type="checkbox"/>	<input checked="" type="checkbox"/>						
178	5	41	22,2	M14x2,0	8500	10	0002-921 876	<input type="checkbox"/>	<input checked="" type="checkbox"/>						
178	5	41	22,2		8500	12	0002-921 875	<input type="checkbox"/>	<input checked="" type="checkbox"/>						
178	5	41	22,2	5/8"	8500	10	0002-921 889	<input type="checkbox"/>	<input checked="" type="checkbox"/>						
178	3	41	22,2		8000	1	7702-921 875	<input type="checkbox"/>	<input checked="" type="checkbox"/>						



Suitable for an antique finish on wood and light cleaning work on metal surfaces.

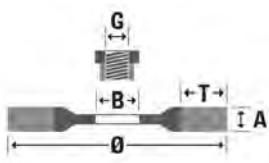

USAGE							TRIM AND MATERIAL								
Ø	A	T	B	G	rpm	pcs.	Order-No.	0,27		Order-No.	€	Order-No.	€	Order-No.	€
								Steel	Cast steel						
115	12	28		M14x2,0	12500	6	2812-522 051	<input type="checkbox"/>	<input checked="" type="checkbox"/>						

Brushes

Angle grinder

BRUSHES


Wheel Brushes

abrasive filament



SPECIAL

Brushes for structuring wood.
Recommended for angle polishers and
angle grinders with adjustable-speed.

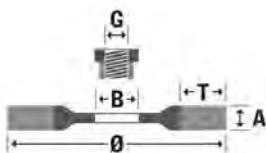

Cup Brushes

knotted wire



SPECIAL

High performance cup brushes for
surface finishing. High cleaning action
from knotted wire.

USAGE



150-180

roughening	40/46
planing	60
deburring	80
edge honing	120
structuring	180
descaling/paint stripping	320
weld seams	Fibre

TRIM AND MATERIAL

Products available with:

Abrasive bristle


Steel	<input checked="" type="checkbox"/>
Cast steel	<input type="checkbox"/>
Stainless steel	<input type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>
Soft wood	<input type="checkbox"/>
Hard wood	<input type="checkbox"/>

mm						Novofil 46	RRP	Novofil 60	RRP	Novofil 80	RRP
Ø	A	T	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
140	55	30	M14	4500	6	5421-401 913		5411-401 913		5401-401 913	

mm						0,35	RRP	0,50	RRP
Ø	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€
65	20	16		12500	10	1602-608 131		1602-608 151	
65	20		M10x1,25	12500	10	2352-608 131		2352-608 151	
65	20		M10x1,5	12500	10	0102-608 131		0102-608 151	
65	20		M14x2,0	12500	10	0002-608 131		0002-608 151	
65	30		M14x2,0	12500	10	3892-608 131 **			

mm						0,35	RRP	0,50	RRP
Ø	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€
65	20	16		12500	6	1602-608 331			
65	20		M10x1,25	12500	6	2352-608 331		2352-608 351	
65	20		M10x1,5	12500	6	0102-608 331		0102-608 351	
65	20		M14x2,0	12500	6	0002-608 331		0442-608 351 *	

** extra long trim



* TÜV-Certification planned.

TRIM AND MATERIAL

Products available with:

Steel wire twist knot

Stainless steel

Steel	<input checked="" type="checkbox"/>
Cast steel	<input type="checkbox"/>
Stainless steel	<input type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>
Soft wood	<input type="checkbox"/>
Hard wood	<input type="checkbox"/>



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de


Brushes

Angle grinder



		USAGE				TRIM AND MATERIAL																			
						Products available with: Steel wire twist knot →						Steel		Cast steel		Stainless steel		Non-ferrous metal		Aluminum		Soft wood		Hard wood	
												Steel		Cast steel		Stainless steel		Non-ferrous metal		Aluminum		Soft wood		Hard wood	
mm						0,35	RRP	0,50	RRP	mm					€	Order-No.	€	Order-No.	€	Order-No.	€				
Ø	T	G	rpm	pcs.		0,35	RRP	0,50	RRP	Ø	T	G	rpm	pcs.	€	Order-No.	€	Order-No.	€	Order-No.	€				
75	20	M14x2,0	11000	10		9908-608 132		9908-608 152		75	20	5/8 Zoll	11000	10	9918-608 132	9918-608 152									


High performance cup brushes for surface finishing. High cleaning action from knotted wire. Trim is prevented from splaying by removable support rings. Once the trim is worn, support rings can be removed, so that brush can be fully used.



		USAGE		TRIM AND MATERIAL																	
				Products available with: Steel wire twist knot →																	
				Steel Cast steel Stainless steel Non-ferrous metal Aluminum Soft wood Hard wood																	
mm																					
Ø	A	T	G	rpm	pcs.	Osborn 0,50	RRP	Osborn 0,80	RRP	mm					€	Order-No.	€	Order-No.	€	Order-No.	€
90	32	65	M14x2,0	7500	6	9906-033 125				90	32	65	5/8"	7500	6	9906-033 126					
90	32	65	5/8"	7500	6					150	45	45	M14x2,0	6000	1	9906-033 016					
150	45	45	M14x2,0	6000	1					150	45	70	M14x2,0	6000	1	9906-033 022					
150	45	70	5/8"	6000	1					150	45	70	5/8"	6000	1	9906-033 021					
150	45	75	M14x2,0	6000	1	9906-033 031 *				150	45	75	5/8"	6000	1	9906-033 030 *					

Cup brushes hardened wire for long service life. Recommended for cleaning cover welds and surfaces in the oil and gas industry.
Industrial version.

* two-rowed



Brushes

Angle grinder

BRUSHES

Cup Brushes

knotted wire



SPECIAL



High performance cup brushes for surface finishing. High cleaning action from knotted wire. Industrial grade.

USAGE



150-230

roughening	0,26
deburring	0,35
edge honing	0,50
descaling/paint stripping	0,60
slag residue	0,80
silicates residue	
blue color residue	

TRIM AND MATERIAL

Products available with:

Steel wire twist knot


Stainless steel

Steel	Cast steel	Stainless steel	Non-ferrous metal
Aluminium			
Soft wood			
Hard wood			

mm					0,35	RRP	0,50	RRP	0,80	RRP	
Ø	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
80	20		5/8 Zoll	8500	6	0802-608 133		0802-608 153		0802-608 183	
80	20		M14x2,0	8500	6	0002-608 133		0002-608 153		0002-608 183	
100	20		M14x2,0	8500	3	0002-608 134		0002-608 154		0002-608 184	
100	20		5/8 Zoll	8500	3	0802-608 134		0802-608 154		0802-608 184	
120	20		M14x2,0	6500	4	0002-608 135		0002-608 155		0002-608 185	
120	20		5/8 Zoll	6500	4	0802-608 135		0802-608 155		0802-608 185	

mm					0,35	RRP	0,50	RRP	0,50	RRP	
Ø	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
80	20		M14x2,0	8500	3	0002-608 333		0002-608 353		0442-608 353 *	
100	20		M14x2,0	8500	3	0002-608 334		0002-608 354		0442-608 354 *	

* TÜV-Certification planned.



Cup Brushes

knotted wire



PERFECT

TRIM AND MATERIAL

Products available with:

Steel wire twist knot

Steel	Cast steel	Stainless steel	Non-ferrous metal
Aluminium			
Soft wood			
Hard wood			

USAGE




150-230

roughening	0,25
planing	0,35
deburring	0,50
edge honing	0,60
descaling/paint stripping	0,80
structuring	
weld seams	

mm					0,35	RRP	0,50	RRP	0,80	RRP	
Ø	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
65	20		M14x2,0	12500	10	2008-608 131		2008-608 151			
75	27		M14x2,0	11000	10			2008-608 152			
80	22		M14x2,0	8500	10			2008-608 153			
100	24		M14x2,0	8500	5			2008-608 154		2008-608 184	



Aggressive tools for fast heavy-duty cleaning an brushing of large surfaces. Do-it-yourself version.




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Angle grinder



Material friendly, flexible brush for cleaning, paint stripping and descaling of surfaces. Industrial grade.




		USAGE				TRIM AND MATERIAL							
						roughening				deburring			
						0,26				0,35			
						0,50				0,60			
						0,80							
115-125						descaling/paint stripping				slag residue			
						silicates residue				blue color residue			


		mm						0,20		RRP		0,30		RRP	
Ø	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€		
60	21	16		12500	10					1602-613 161					
60	21	16	M10x1,25	12500	10	5262-613 141				1602-613 161					
60	21		M10x1,5	12500	10	0102-613 141				0002-613 161					
60	21		M14x2,0	12500	10	0002-613 141				0002-613 161					
60	21		M14x2,0	12500	4					1602-613 162					
75	23	16		12500	10	1602-613 142				1602-613 162					
75	23	16	M10x1,25	12500	10	5652-613 142				5652-613 162					
75	23		M10x1,5	12500	10	0102-613 142				0102-613 162					
75	23		M14x2,0	12500	10	0002-613 142				0002-613 162					
75	23		M14x2,0	12500	4					0802-613 162					
75	23		5,8 Zoll	12500	10	0802-613 142				0802-613 162					
75	23		5,8 Zoll	12500	4					0802-613 162					

		mm						0,30		RRP		0,30		RRP	
Ø	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€		
60	21		M10x1,25	12500	10			4912-613 561 *							
60	21		M14x2,0	12500	4	0442-613 361 *		4902-613 561 *							
60	21		M14x2,0	12500	10			4902-613 561 *							
75	25		M14x2,0	12500	4	0442-613 362 *		4902-613 562 *							
75	25		M14x2,0	12500	10										

* TÜV-Certification planned.

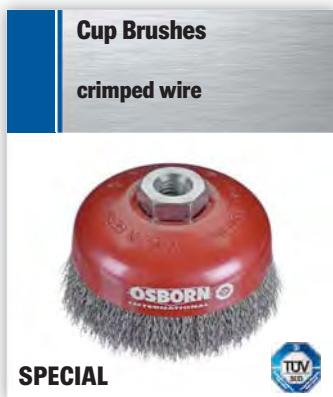

Material friendly, flexible brush for cleaning, paint stripping and descaling of surfaces. Industrial grade.



		mm						0,20		RRP		0,30		RRP	
Ø	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€		
80	30		M14x2,0	8500	5	0002-613 143				0002-613 163					
80	25		5/8 Zoll	8500	5	0802-613 143				0802-613 163					
80	25		M14x2,0	8500	5							0002-613 193			
100	30		M14x2,0	8500	3	0002-613 144				0002-613 164			0002-613 194		
100	30		M14x2,0	8500	4					0802-613 164			0802-613 194		
100	30		5/8 Zoll	8500	3	0802-613 144				0002-613 165			0002-613 195		
125	30		M14x2,0	6500	4	0002-613 145				0802-613 165			0802-613 195		
125	30		5/8 Zoll	6500	4					0802-613 166			0802-613 196		
150	40		M14x2,0	4500	3	0002-613 146				0002-613 166			0802-613 196		
150	40		5/8 Zoll	4500	3	0802-613 146									


		mm						0,30		RRP		0,30		RRP	
Ø	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€		
80	25		M14x2,0	8500	4	0002-613 363				0442-613 363 *			4902-613 563 *		
80	25		M14x2,0	8500	5										
80	25		5/8 Zoll	8500	4	0802-613 363				0442-613 364 *			4912-613 564 *		
100	25		M14x2,0	8500	3	0002-613 364									
100	30		M14x2,0	8500	4					0802-613 364					
100	30		5/8 Zoll	8500	3	0802-613 364									
125	30		5/8 Zoll	6500	2	0802-613 365				0442-613 365 *					
125	30		M14x2,0	6500	2	0002-613 365									

* TÜV-Certification planned.


Brushes

Angle grinder

BRUSHES

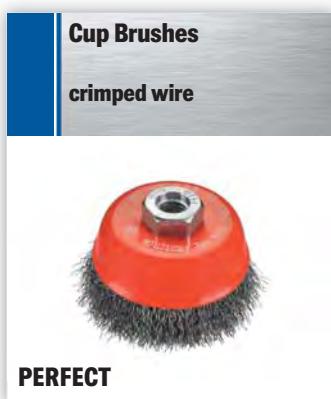


Material friendly, flexible brush for cleaning, paint stripping and descaling of surfaces.
Do-it-yourself version.




150-180		USAGE		TRIM AND MATERIAL																					
Products available with:																									
Steel wire straight →																									
<input checked="" type="checkbox"/> Steel <input checked="" type="checkbox"/> Cast steel <input type="checkbox"/> Stainless steel <input type="checkbox"/> Non-ferrous metal <input type="checkbox"/> Aluminium <input type="checkbox"/> Soft wood <input type="checkbox"/> Hard wood																									

Ø	A	T	B	G	rpm	pcs.	0,30		RRP	0,30 brass-coated		RRP
							Order-No.	€		Order-No.	€	
60		18			12500	10	2008-613 161			2008-613 061		
75		25			12500	10	2008-613 162			2008-613 062		
80		25			8500	10	2008-613 163			2008-613 063		
100		25			8500	5	2008-613 164			2008-613 064		
125		30			6500	5	2008-613 165			2008-613 065		

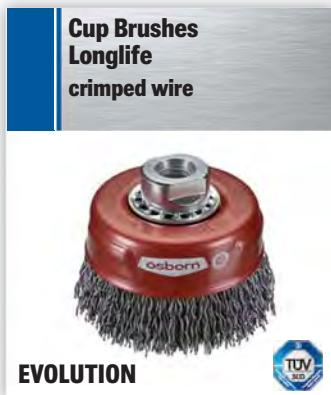

Material friendly. Soft cleaning brushes for surface finishing. Special long-life wire for very long service life and reduced wire breakage.



115-230		USAGE		TRIM AND MATERIAL																					
Products available with:																									
Steel wire straight →																									
<input checked="" type="checkbox"/> Steel <input checked="" type="checkbox"/> Cast steel <input type="checkbox"/> Stainless steel <input type="checkbox"/> Non-ferrous metal <input type="checkbox"/> Aluminium <input type="checkbox"/> Soft wood <input type="checkbox"/> Hard wood																									

Ø	T	G	rpm	pcs.	Longlife 0,30		RRP				
					Order-No.	€		Order-No.	€	Order-No.	€
60	20	M14x2,0	12500	10	3902-613 161						
75	25	M14x2,0	12500	10	3912-613 163						
80	25	M14x2,0	12500	5	3902-613 163						
100	22	M14x2,0	8500	4	3902-613 164						




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Angle grinder



Paint stripping, deburring and cleaning of metal and wooden surfaces.



USAGE

150	roughening	<input type="checkbox"/>	0.26
	deburring	<input checked="" type="checkbox"/>	0.35
edge honing	<input checked="" type="checkbox"/>	0.50	
descaling/paint stripping	<input checked="" type="checkbox"/>	0.60	
slag residue	<input type="checkbox"/>	0.80	
silicates residue	<input type="checkbox"/>		
blue color residue	<input type="checkbox"/>		

TRIM AND MATERIAL


Products available with:

Abrasive bristle	Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
------------------	-------	------------	-----------------	-------------------	----------	-----------	-----------

mm	G	rpm	pcs.	Novofil 80	RRP	Novofil 120	RRP	Novofil 180	RRP
Ø	T	B		Order-No.	€	Order-No.	€	Order-No.	€
100	25	22,2	M14x2,0	8500	3	8812-607 914	2312-607 914	1802-607 914	
100	25			8500	3	6402-608 914	6412-608 914	1802-608 914	



Particularly suitable for finishing or denibbing of wooden surfaces.



USAGE

150-180	roughening	<input checked="" type="checkbox"/>	40/46
	planing	<input type="checkbox"/>	50
deburring	<input type="checkbox"/>	80	
edge honing	<input type="checkbox"/>	120	
structuring	<input checked="" type="checkbox"/>	180	
descaling/paint stripping	<input checked="" type="checkbox"/>	320	
weld seams	<input type="checkbox"/>	Flame	

TRIM AND MATERIAL

Products available with:

Abrasive bristle	Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
------------------	-------	------------	-----------------	-------------------	----------	-----------	-----------

mm	G	rpm	pcs.	Novofil 46	RRP	Novofil 60	RRP	Novofil 80	RRP
Ø	T			Order-No.	€	Order-No.	€	Order-No.	€
130	70	50	M14x2,0	2500	4	9301-614 916	9311-614 916	9321-614 916	

mm	G	rpm	pcs.	Novofil 120	RRP
Ø	T			Order-No.	€
130	70	50	M14x2,0	2500	4
				9331-614 916	

Brushes

Angle grinder

BRUSHES

Bevel Brushes


knotted wire



SPECIAL



Particularly suitable for processing inaccessible areas e.g. angles, edges or corners.

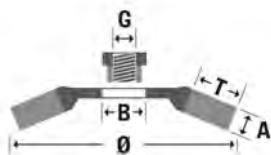

USAGE



115-125

	0,26	0,35	0,50	0,80
roughening	□	□	□	□
deburring	■	■	■	■
edge honing	■	■	■	■
descaling/paint stripping	■	■	■	■
slag residue	□	□	□	□
silicates residue	□	■	■	■
blue color residue	□	■	■	■

TRIM AND MATERIAL

Products available with:

Steel wire twist knot

Stainless steel

Steel	Cast steel	Stainless steel	Non-ferrous metal
Aluminium			
Soft wood			
Hard wood			

mm							max	0,35 18 knots	RRP	0,50 18 knots	RRP	
Ø	A	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
100	13	22		M10x1,25	12500	10	4802-622 131 *		1602-622 151			
100	13	22		M10x1,5	12500	10	0102-622 131		2352-622 151	0102-622 151		
100	13	22		M14x2,0	12500	10	0002-622 131		0002-622 151			
115	15	20	16		12500	10	0002-632 131		1602-632 151			
115	15	20		M14x2,0	12500	10	0002-632 131		0002-632 151			
115	15	20		5/8 Zoll	12500	10	0802-632 131		0802-632 151			
125	15	23		M14x2,0	12500	10	3602-632 131		2902-632 151			

* TÜV-Certification planned.

mm							max	0,35 22 knots	RRP	0,50 22 knots	RRP	
Ø	A	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
100	13	22		M14x2,0	12500	10	0002-623 131		0002-623 151			

mm							max	0,35 18 knots	RRP	0,50 18 knots	RRP	0,50 1.4401	RRP
Ø	A	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
100	13	22		M10x1,25	12500	5	4802-622 331		2352-622 351				
100	13	22		M10x1,5	12500	5	0102-622 331		0102-622 351	0002-622 351			
100	13	22		M14x2,0	12500	5	0002-622 331		0002-622 351		0442-622 351 *		
115	15	20		M14x2,0	12500	5	0002-632 331		0002-632 351		0442-632 351 *		
115	15	20		5/8 Zoll	12500	5	0802-632 331		0802-632 351		3602-632 351		
125	15	23		M14x2,0	12500	10	3602-632 331						

* TÜV-Certification planned.

mm							max	0,35 22 knots	RRP	0,50 22 knots	RRP	
Ø	A	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
100	13	22		M14x2,0	12500	5	0002-623 331		0002-623 351			

Bevel Brushes

knotted wire



PERFECT

The ideal shape for brushing hard-to-reach areas. Multi-purpose brushes for light and medium cleaning jobs.

USAGE



115-125

	0,26	0,35	0,50	0,80
roughening	□	□	□	□
planing	■	■	■	■
deburring	■	■	■	■
edge honing	■	■	■	■
structuring	□	□	□	□
descaling/paint stripping	■	■	■	■
weld seams	■	■	■	■

TRIM AND MATERIAL

Products available with:

Steel wire twist knot

Steel	Cast steel	Stainless steel	Non-ferrous metal
Aluminium			
Soft wood			
Hard wood			

mm							max	0,50	RRP			
Ø	A	T	B	G	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
100	13	22		M14x2,0	12500	8	2008-622 151					




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Angle grinder



Particularly suitable for processing inaccessible areas e.g. angles, edges or corners.

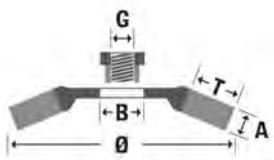

USAGE

115-125	roughening	0.26
	deburring	0.35
edge honing	0.50	
descaling/paint stripping	0.60	
slag residue	0.80	
silicates residue	0.26	
blue color residue	0.35	

TRIM AND MATERIAL


Products available with:

Steel wire crimped	Steel
Stainless steel	Cast steel
	Stainless steel
	Non-ferrous metal
	Aluminum
	Soft wood
	Hard wood

mm				0,30		RRP	0,30 brass-coated		RRP	0,30 brass-coated	RRP		
				Ø	A	T	G	rpm	pcs.	Order-No.	€	Order-No.	€
100	20	20		M10x1,25	12500	10				2352-512 162			
100	20	10		M10x1,25	12500	10				2352-512 161			
100	20	20		M10x1,5	12500	10				0102-512 162		0002-512 062	
100	20	20		M10x1,5	12500	10				0102-512 161			
100	10	20		M14x2,0	12500	10				0002-512 162		0002-512 061	
100	10	20		M14x2,0	12500	10				0002-512 161			
125	10	25		M14x2,0	12500	10				0002-514 161			



The ideal shape for brushing hard-to-reach areas. Multi-purpose brushes for light and medium cleaning jobs.

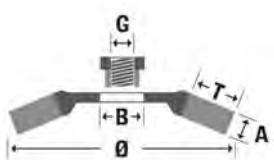

USAGE


125	roughening	0,15
	planing	0,20/0,25/0,27
deburring	0,30	
edge honing	0,35	
structuring	0,40	
descaling/paint stripping	0,50	
weld seams	0,20	

TRIM AND MATERIAL

Products available with:

Steel wire straight	Steel
	Cast steel
	Stainless steel
	Non-ferrous metal
	Aluminum
	Soft wood
	Hard wood

mm				0,30 brass-coated		RRP	0,30		RRP		
				Ø	A	T	G	rpm	pcs.	Order-No.	€
100	10	20		M14x2,0	12500	10				2008-512 061	

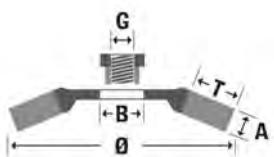


Brushes

Angle grinder



For reduction of arbor holes.



Inch			RRP				
Inner Ø	Outer Ø		pcs.	Order-No.	€	Order-No.	€
3/8"	5/8"	1	0003-000 222				
1/2"	5/8"	1	0003-000 223				
3/8"	7/8"	1	0003-000 242				
7/8"	1/2"	1	0003-000 243				
7/8"	5/8"	1	0003-000 244				



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

CORDLESS IS KING



More power, longer battery life and no cables: the new generation of cordless power tools, make work easy, even if there is no electricity socket available. Battery life and the actual performance of these tools, has made a huge leap in recent years. Cordless power tools are now an alternative for a whole range of users.

Whether on construction sites, or for plumbing, HVAC, janitor services, firefighting, road service and other mobile units, cordless power tools are now considered an essential piece of equipment.



Why special tools?

Cordless power tools are commonly used by mobile services, where not the full range of accessories is available. Users therefore need universal tools which can tackle a variety of tasks on different materials. By this the amount of accessories to be carried along on a construction site can be reduced when steel, stainless steel and wood need to be worked on.

Commonly cordless angle grinders run with a 30% reduced working speed compared to usual angle grinders. Having specifically developed accessories for cordless power tools in use means that the perfect result of brushes, grinding- or cutting discs can be reached by a speed of 7,000 to 8,000 rpm. Osborn Brushes are reduced in weight and therefore prolong the battery life between recharges by 20–25%.

Advantages

- Low weight
- Precise Working
- Multifunctional
- Easy to handle
- Reduced imbalance and vibration
- Longer battery life (20–25 %)
- Fewer charging cycles
- Universal usage on all materials
- Can be used for different materials

WE MAKE IT EASY FOR YOU!

OSBORN has developed accessories which are flexible in use, light weight, easy to handle and assure highest precision.

The end result will meet all your expectations and fulfill all aspects of work safety. This is the only way to work effectively and get the best out of your cordless power tool.

Brushes

Angle grinder

BRUSHES

Cup Brushes

crimped wire




mm	G	rpm	pcs.	0,30	RRP
Ø	T	M14x2,0		Order-No.	€
60	21	12500	5	6912-613 561	

Developed
for usage on
cordless
power
tools!

Suitable for:

Steel, stainless steel, brass, wood

Cleaning, satinising, flattening and degraining



Cup Brushes

abrasive nylon




mm	G	rpm	pcs.	grit 80	RRP
Ø	T	M14x2,0		Order-No.	€
60	21	12500	5	6912-613 891	

Developed
for usage on
cordless
power
tools!

Universal cleaningbrush, reduced weight, with SIC abrasive nylon to process large surfaces.

Suitable for:
Steel, stainless steel, non-ferrous, aluminum, brass, wood

Deburring, paint stripping, cleaning, satinising, degraining



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Angle grinder




mm				grit	RRP			
Ø	A			80	€	Order-No.	€	Order-No.
100	20	M14x2,0	12500	5	6912-622 891			

Developed
for usage on
cordless
power
tools!

Universal cleaningbrush, reduced weight, with SIC abrasive nylon to process inaccessible areas like edges, angles, corners and cleaning MIG/MAG/TIG weld seams.

Suitable for:
Steel, stainless steel, non-ferrous, aluminum, brass, wood

Deburring, paint stripping, cleaning, satinising, degreasing

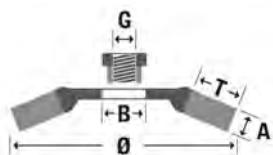

Please note:

Find polishing and satinising accessories for cordless power tools in chapter Polishing/Satinising on page 95 and 104.



GENERAL INFORMATION	40
WHEEL BRUSHES	41
CUP BRUSHES	47
END BRUSHES	50
FLAP WHEELS	54
SETS	55

Brushes

Power drill



Important user information

Brushes for power drills



To be noted when selecting brushes and using power drills:

1. General user information

The brushes on the following pages are suitable for all brands of power drills. It does not matter whether you are using a 1- or 2-speed machine or a percussion drill.

The recommended speed is approx. 1,500 - 3,500 rpm.

2. Typical brush types for power drills



Wheel brushes

Available with knotted and crimped wire, as well as abrasive filaments or plastic bonded wires.



Cup brushes

Available with knotted and crimped wire, as well as abrasive filaments and plastic bonded wires.

Please note:

Cup and end brushes spread during operation.



End brushes

Available with crimped wire, abrasive filaments and plastic bonded wires.




Flap wheel brushes

Available with crimped wire, abrasive filaments or Tampico fibre.



Tube & internal brushes

All details can be found in the chapter on internal finishing.

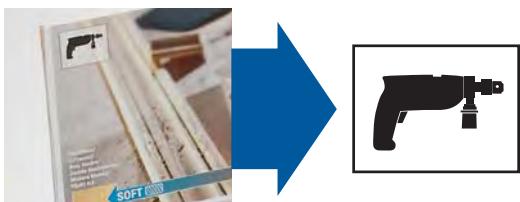

The machine information on the packaging and displays

Details on machine suitability can also be found on the machine icons on Osborn packaging and counter and shelf displays.

Brushes

Power drill

BRUSHES

Wheel Brushes

knotted wire



SPECIAL

USAGE



roughening	<input type="checkbox"/>	0,26
planing	<input checked="" type="checkbox"/>	0,35
deburring	<input type="checkbox"/>	0,50
edge honing	<input checked="" type="checkbox"/>	0,60
structuring	<input type="checkbox"/>	0,80
descaling/paint stripping	<input type="checkbox"/>	
weld seams	<input checked="" type="checkbox"/>	

roughening planing deburring edge honing structuring descaling/paint stripping weld seams

TRIM AND MATERIAL

Products available with:

Steel wire twist knot

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
<input type="checkbox"/>	<input checked="" type="checkbox"/>					

Stainless steel


Aluminium

Soft wood

Hard wood

mm	max.	Order-No.	RRP	mm	max.	Order-No.	RRP	mm	max.	Order-No.	RRP												
Ø 75	A 12	T 18	S 6	rpm 20000	pcs. 12	0202-611131	€ 0,35	Ø 75	A 12	T 18	S 6	rpm 20000	pcs. 12	0202-611151	€ 0,50	Ø 75	A 12	T 18	S 6	rpm 20000	pcs. 12	0202-611351	€ 0,50

For heavy-duty cleaning and deburring applications such as slag and silicate removal, weld seam finishing or removal of the underfloor protection in motor vehicles.

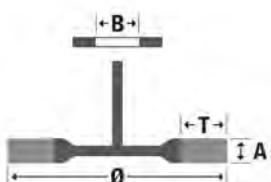

Wheel Brushes

knotted wire



SPECIAL

USAGE



roughening	<input type="checkbox"/>	0,26
planing	<input checked="" type="checkbox"/>	0,35
deburring	<input type="checkbox"/>	0,50
edge honing	<input checked="" type="checkbox"/>	0,60
structuring	<input type="checkbox"/>	0,80
descaling/paint stripping	<input checked="" type="checkbox"/>	
weld seams	<input checked="" type="checkbox"/>	

roughening planing deburring edge honing structuring descaling/paint stripping weld seams

TRIM AND MATERIAL

Products available with:

Steel wire twist knot

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
<input type="checkbox"/>	<input checked="" type="checkbox"/>					


Stainless steel

Soft wood

Hard wood

mm	max.	Order-No.	UVP	mm	max.	Order-No.	UVP	mm	max.	Order-No.	UVP				
Ø 75	A 12	T 18	S 6	rpm 20000	pcs. 8	7202-611151	€ 0,50	Ø 75	A 12	T 18	S 6	rpm 20000	pcs. 8	7012-611351	€ 0,50


Do-it-yourself type for commercially available power drills in self-service packaging.

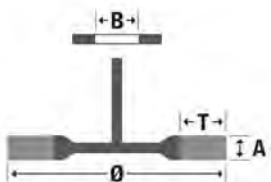

Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Power drill

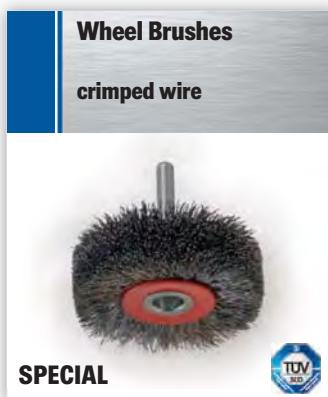

USAGE		TRIM AND MATERIAL														
		Products available with:														
		Steel wire crimped →														
		Stainless steel →														
		Brass wire →														
		<table border="1"> <tr> <td>Steel</td> <td>Cast steel</td> <td>Stainless steel</td> <td>Non-ferrous metal</td> <td>Aluminium</td> <td>Soft wood</td> <td>Hard wood</td> </tr> </table>								Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood										

mm	Ø	A	T	rpm	max.	pcs.	0,15	RRP	0,20	RRP	0,30	RRP
							Order-No.	€	Order-No.	€	Order-No.	€
20	6	4	20000	10	0,15	10	0002-501132		0002-501142			
20	9	4	20000	10	0,20	10			0002-501143			
30	6	6	20000	10	0,25	10			0002-502141			
30	9	6	20000	10	0,30	10	0002-502132		0002-502142			
30	12	6	20000	10	0,35	10			0002-502143			
40	11	10	18000	10	0,40	10	0002-503132		0002-503142			
40	16	10	18000	10	0,40	10			0002-503143			
50	10	13	15000	10	0,40	10			0002-504141		0002-504161	
50	17	13	15000	10	0,40	10	0002-504132		0002-504142		0002-504162	
50	23	13	15000	10	0,40	10			0002-504143		0002-504163	
60	12	15	15000	10	0,40	10			0002-505141		0002-505161	
60	18	15	15000	10	0,40	10	0002-505132		0002-505142		0002-505162	
70	11	15	15000	10	0,40	10			0002-506141		0002-506161	
70	18	15	15000	10	0,40	10	0002-506132		0002-506142			
80	19	20	15000	10	0,40	10			0002-507142		0002-507162	

mm	Ø	A	T	rpm	max.	pcs.	0,15	RRP	0,20	RRP	0,30	RRP
							Order-No.	€	Order-No.	€	Order-No.	€
30	6	6	20000	10	0,15	10	0002-502341		0002-502342			
30	9	6	20000	10	0,15	10	0002-502332		0002-502342			
30	12	6	20000	10	0,15	10	0002-502333		0002-502343			
40	7	10	18000	10	0,15	10	0002-503331		0002-503341			
40	11	10	18000	10	0,15	10	0002-503332		0002-503342			
40	16	10	18000	10	0,15	10	0002-503333		0002-503343			
50	10	13	15000	10	0,15	10			0002-504341		0002-504361	
50	17	13	15000	10	0,15	10	0002-504332		0002-504342		0002-504362	
50	23	13	15000	10	0,15	10			0002-504343		0002-504363	
60	12	15	15000	10	0,15	10			0002-505341		0002-505361	
60	18	15	15000	10	0,15	10	0002-505332		0002-505342		0002-505362	
60	23	15	15000	10	0,15	10			0002-505343		0002-505363	
70	11	15	15000	10	0,15	10			0002-506341		0002-506361	
70	18	15	15000	10	0,15	10	0002-506332		0002-506342		0002-506362	
70	23	15	15000	10	0,15	10			0002-506343		0002-506363	
80	10	20	12000	10	0,15	10					5162-507361	
80	19	20	12000	10	0,15	10					0002-507342	

mm	Ø	A	T	rpm	max.	pcs.	0,20	RRP				
							Order-No.	€	Order-No.	€	Order-No.	€
30	9	6	20000	10	0,20	10	0002-502542					
40	11	10	18000	10	0,20	10	0002-503542					
50	17	13	15000	10	0,20	10	0002-504542					
60	18	15	15000	10	0,20	10	0002-505542					
70	18	15	15000	10	0,20	10	0002-506542					
80	19	20	12000	10	0,20	10	0002-507542					

Brushes

Power drill

BRUSHES


Wheel Brushes

crimped wire



SPECIAL

High performance brushes for powerdrills and straight grinders in self-service packaging.

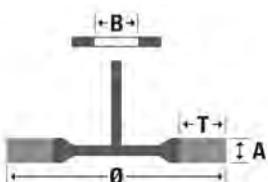

USAGE



roughening	0,15
planing	0,20
deburring	0,25/0,27
edge honing	0,30
structuring	0,35
descaling/paint stripping	0,40
weld seams	0,50

TRIM AND MATERIAL

Products available with:

Steel wire crimped

Stainless steel

Brass wire

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■

mm						max	Order-No.	RRP	Order-No.	RRP	Order-No.	RRP	
Ø	A	T	S	rpm	pcs.								
50	17	13	6	15000	6							3002-504 342	
60	18	15	6	15000	6							7002-505 162	
70	18	15	6	15000	6	7002-506 142							
80	19	20	6	12000	6	7002-507 142						7002-507 162	
													7002-507 342


Wheel Brushes

crimped wire



PERFECT

Do-it-yourself type for commercially available power drills.

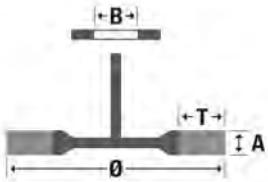

USAGE



roughening	0,15
planing	0,20
deburring	0,25/0,27
edge honing	0,30
structuring	0,35
descaling/paint stripping	0,40
weld seams	0,50

TRIM AND MATERIAL


Products available with:

Steel wire crimped

Stainless steel

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■

mm						max	Order-No.	RRP	Order-No.	RRP	Order-No.	RRP	
Ø	A	T	S	rpm	pcs.								
50	7	10	10	4500	20	0003-600 211							
63	9	13	13	4500	20	0003-600 311							
75	10	16	16	4500	10	0008-600 411							
75	15	16	16	4500	10								
100	12	22	22	4500	10	0008-600 511							
100	17	22	22	4500	10								
													0008-600 522

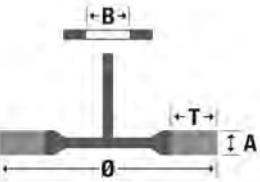

mm						max	Order-No.	RRP	Order-No.	RRP	Order-No.	RRP
Ø	A	T	S	rpm	pcs.							
50	7	10	10	4500	20	0088-600 221						
75	10	16	16	4500	10							
100	10	22	22	4500	10	0008-600 531						




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Power drill



Do-it-yourself type for commercially available power drills in self-service packaging.

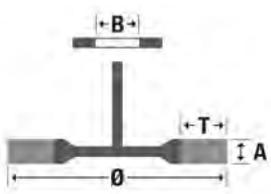

USAGE

	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50
roughening	□	□	□	□	□	□	□
planing	■	■	■	■	■	■	■
deburring	■	■	■	■	■	■	■
edge honing	■	■	■	■	■	■	■
structuring	□	□	□	□	□	□	□
descaling/paint stripping	□	□	□	□	□	□	□
weld seams	■	■	■	■	■	■	■

TRIM AND MATERIAL

Products available with:


Steel wire crimped	Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
--------------------	-------	------------	-----------------	-------------------	----------	-----------	-----------

Stainless steel

mm								0,30	RRP	0,30	UVP
Ø	A	T	S	rpm	pcs.			Order-No.	€	Order-No.	€
50	7	10	6	4500	8			7003-600 221			
75	10	16	6	4500	8			7003-600 421			
100	12	22	6	4500	8			7003-600 521			
100	12	22	6	4500	6	7018-600 521					



Wheel brushes for wood working.
Particularly suitable for brushing out annual (year) rings. Supplied on 8 mm shaft.

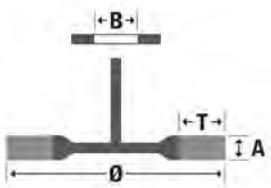

USAGE

	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50
roughening	□	□	□	□	□	□	□
planing	■	■	■	■	■	■	■
deburring	□	□	□	□	□	□	□
edge honing	■	■	■	■	■	■	■
structuring	□	□	□	□	□	□	□
descaling/paint stripping	□	□	□	□	□	□	□
weld seams	■	■	■	■	■	■	■

TRIM AND MATERIAL

Products available with:

Steel wire crimped	Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
--------------------	-------	------------	-----------------	-------------------	----------	-----------	-----------

mm								0,25 cordwire	RRP
Ø	A	T	rpm	pcs.	Order-No.			Order-No.	€
80	35	25	4000	10	0908-507 061				

Brushes

Power drill

BRUSHES


Wheel Brushes

crimped wire



SPECIAL

Do-it-yourself type for commercially available power drills in self-service packaging.

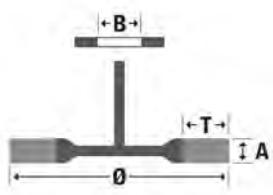

USAGE

roughening	<input type="checkbox"/>	0.15
planing	<input checked="" type="checkbox"/>	0.20
deburring	<input type="checkbox"/>	0.25/0.27
edge honing	<input checked="" type="checkbox"/>	0.30
structuring	<input type="checkbox"/>	0.35
descaling/paint stripping	<input type="checkbox"/>	0.40
weld seams	<input checked="" type="checkbox"/>	0.50

TRIM AND MATERIAL

Products available with:

Steel wire crimped →

Steel	<input checked="" type="checkbox"/>
Cast steel	<input checked="" type="checkbox"/>
Stainless steel	<input type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>
Soft wood	<input checked="" type="checkbox"/>
Hard wood	<input checked="" type="checkbox"/>

Ø	A	T	rpm	pcs.	0,25	RRP
					cordwire	
80	35	25	4000	10	7003-507 061	€

Wheel Brushes

**crimped wire
plastic-bonded**



EVOLUTION



USAGE

roughening	<input type="checkbox"/>	0.15
planing	<input checked="" type="checkbox"/>	0.20
deburring	<input type="checkbox"/>	0.25/0.27
edge honing	<input type="checkbox"/>	0.30
structuring	<input type="checkbox"/>	0.35
descaling/paint stripping	<input type="checkbox"/>	0.40
weld seams	<input type="checkbox"/>	0.50

TRIM AND MATERIAL


Products available with:

Steel wire crimped →

Steel	<input checked="" type="checkbox"/>
Cast steel	<input checked="" type="checkbox"/>
Stainless steel	<input type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>
Soft wood	<input checked="" type="checkbox"/>
Hard wood	<input checked="" type="checkbox"/>

Ø	A	T	rpm	pcs.	0,30	RRP
					cordwire	
63	8	20	15000	12	0002-911 941	€
76	8	26	15000	12	0002-911 951	€

Brush with plastic-bonded wire for longer service life and reduced wire breakage.

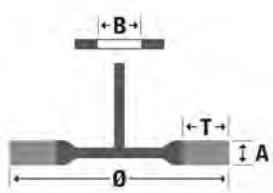


Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Power drill



The trim on these brushes follows the contours of the work piece without significantly affecting the surface. Brushes with abrasive bristles for cleaning materials.

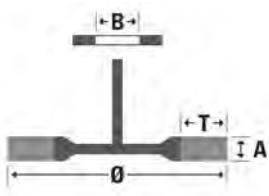

USAGE

roughening	40/46
planing	60
deburring	80
edge honing	120
structuring	180
descaling/paint stripping	320
weld seams	Fibre

TRIM AND MATERIAL

Products available with:


Abrasive bristle →

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
-------	------------	-----------------	-------------------	----------	-----------	-----------

Ø	A	T	rpm	pcs.	grit 80 red Order-No.	RRP	grit 180 blue Order-No.	RRP	Ø	A	Order-No.	€
75	10	16	4500	10	0802-600 491		0182-600 491					
100	10	23	4500	10	0802-600 591		0182-600 591					



Do-it-yourself type for commercially available power drills in self-service packaging.

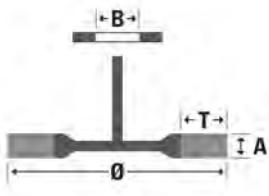

USAGE

roughening	40/46
planing	60
deburring	80
edge honing	120
structuring	180
descaling/paint stripping	320
weld seams	Fibre

TRIM AND MATERIAL

Products available with:

Abrasive bristle →

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
-------	------------	-----------------	-------------------	----------	-----------	-----------

Ø	A	T	rpm	pcs.	grit 80 red Order-No.	RRP	grit 180 blue Order-No.	RRP	Ø	A	Order-No.	€
75	10	16	4500	10	7802-600 491		7182-600 491					
100	10	23	4500	10	7802-600 591		7182-600 591					

Brushes

Power drill

BRUSHES

Cup Brushes

knotted wire



SPECIAL



USAGE



roughening	<input type="checkbox"/>	0,26
planing	<input checked="" type="checkbox"/>	0,35
deburring	<input type="checkbox"/>	0,50
edge honing	<input checked="" type="checkbox"/>	0,60
structuring	<input type="checkbox"/>	0,80
descaling/paint stripping	<input checked="" type="checkbox"/>	
weld seams	<input checked="" type="checkbox"/>	


TRIM AND MATERIAL

Products available with:

Steel wire twist knot → Steel Cast steel Stainless steel Non-ferrous metal Aluminium Soft wood Hard wood

mm	max.	rpm	pcs.	0,50	RRP
Ø 65	T 23	6000	10	1004-608 151	

High performance cup brushes for demanding cleaning work.



Cup Brushes

knotted wire



SPECIAL



USAGE



roughening	<input type="checkbox"/>	0,26
planing	<input checked="" type="checkbox"/>	0,35
deburring	<input type="checkbox"/>	0,50
edge honing	<input checked="" type="checkbox"/>	0,60
structuring	<input type="checkbox"/>	0,80
descaling/paint stripping	<input checked="" type="checkbox"/>	
weld seams	<input checked="" type="checkbox"/>	


TRIM AND MATERIAL

Products available with:

Steel wire twist knot → Steel Cast steel Stainless steel Non-ferrous metal Aluminium Soft wood Hard wood

mm	max.	rpm	pcs.	0,50	RRP
Ø 65	T 23	6000	10	7004-608 151	

Do-it-yourself type for commercially available power drills in self-service packaging.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Power drill



Do-it-yourself type for power drills.



USAGE

	roughening	planing	deburring	edge honing	structuring	descaling/paint stripping	weld seams	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50
roughening	□	□	□	□	□	□	□	□	□	□	□	□	□	□
planing	■	■	■	■	■	■	■	■	■	■	■	■	■	■
deburring	■	■	■	■	■	■	■	■	■	■	■	■	■	■
edge honing	■	■	■	■	■	■	■	■	■	■	■	■	■	■
structuring	□	□	□	□	□	□	□	□	□	□	□	□	□	□
descaling/paint stripping	□	□	□	□	□	□	□	□	□	□	□	□	□	□
weld seams	■	■	■	■	■	■	■	■	■	■	■	■	■	■

TRIM AND MATERIAL

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■

Products available with:
Steel wire crimped →
Stainless steel →
Brass wire →

mm	max.	mm	0,20	RRP	0,30	RRP	0,20	RRP	
Ø	T	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
50	17	4500	20	0008-600 811		0008-600 821		0023-600 851	
75	20	4500	10	0008-600 911		0008-600 921		0023-600 951	

mm	max.	mm	0,30	RRP					
Ø	T	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
50	17	4500	20	0008-600 832					
75	20	4500	10	0008-600 361					



Do-it-yourself type for power drills in self-service packaging.



USAGE

	roughening	planing	deburring	edge honing	structuring	descaling/paint stripping	weld seams	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50
roughening	□	□	□	□	□	□	□	□	□	□	□	□	□	□
planing	■	■	■	■	■	■	■	■	■	■	■	■	■	■
deburring	■	■	■	■	■	■	■	■	■	■	■	■	■	■
edge honing	■	■	■	■	■	■	■	■	■	■	■	■	■	■
structuring	□	□	□	□	□	□	□	□	□	□	□	□	□	□
descaling/paint stripping	□	□	□	□	□	□	□	□	□	□	□	□	□	□
weld seams	■	■	■	■	■	■	■	■	■	■	■	■	■	■

TRIM AND MATERIAL

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■

Products available with:
Steel wire crimped →
Stainless steel →

mm	max.	mm	0,30	RRP	0,30	RRP	UVP			
Ø	T	S	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
50	17	6	4500	8	7008-600 832		7003-600 821			
50	17	6	4500	6			7003-600 921			
75	20	6	4500	8	7008-600 361					
75	20	6	4500	6						

Brushes

Power drill

BRUSHES

Cup Brushes
crimped wire plastic-bonded



EVOLUTION

USAGE



roughening	<input type="checkbox"/>	0,15
planing	<input checked="" type="checkbox"/>	0,20
deburring	<input type="checkbox"/>	0,25
edge honing	<input checked="" type="checkbox"/>	0,30
structuring	<input type="checkbox"/>	0,35
descaling/paint stripping	<input type="checkbox"/>	0,40
weld seams	<input checked="" type="checkbox"/>	0,50

TRIM AND MATERIAL

Products available with:

Steel wire crimped →

<input checked="" type="checkbox"/> Steel	<input type="checkbox"/> Cast steel	<input type="checkbox"/> Stainless steel
<input type="checkbox"/> Non-ferrous metal	<input type="checkbox"/> Aluminium	<input type="checkbox"/> Soft wood
<input type="checkbox"/> Hard wood	<input type="checkbox"/>	<input type="checkbox"/>

mm

Ø 50

max.



rpm

15000

pcs.

12


0,30

RRP

Order-No.

0002-930 821

Brush with plastic-bonded wire for longer service life and reduced wire breakage.



Cup Brushes
abrasive filament



PERFECT



USAGE



roughening	<input checked="" type="checkbox"/>	40/46
planing	<input type="checkbox"/>	60
deburring	<input type="checkbox"/>	80
edge honing	<input type="checkbox"/>	120
structuring	<input type="checkbox"/>	180
descaling/paint stripping	<input checked="" type="checkbox"/>	320
weld seams	<input type="checkbox"/>	Flame

TRIM AND MATERIAL

Products available with:

Abrasive bristle →

<input checked="" type="checkbox"/> Steel	<input type="checkbox"/> Cast steel	<input type="checkbox"/> Stainless steel
<input type="checkbox"/> Non-ferrous metal	<input type="checkbox"/> Aluminium	<input type="checkbox"/> Soft wood
<input type="checkbox"/> Hard wood	<input type="checkbox"/>	<input type="checkbox"/>

mm

Ø 50

max.



rpm

4500

pcs.

10

grit 80 red

RRP

Order-No.

0802-600 891

grit 180 blue

RRP

Order-No.

0182-600 891

mm

Ø 75

max.



rpm

4500

pcs.

10

grit 80 red

RRP

Order-No.

0802-600 991

grit 180 blue

RRP

Order-No.

0182-600 991

The trim on these brushes follows the contours of the work piece without significantly affecting the surface.
Brushes with abrasive bristles for cleaning materials.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

Power drill

Cup Brushes

abrasive filament



PERFECT



Do-it-yourself type for power drills in self-service packaging.



USAGE

roughening	40/46
planing	60
deburring	80
edge honing	120
structuring	180
descaling/paint stripping	320
weld seams	Fibre

TRIM AND MATERIAL

Products available with:

Abrasive bristle →

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
-------	------------	-----------------	-------------------	-----------	-----------	-----------

mm	rpm	pcs.	grit 80 red	RRP	grit 180 blue	RRP
Ø	T		Order-No.	€	Order-No.	€
50	17	4500	10	7802-600 891	7182-600 891	
75	23	4500	10	7802-600 991	7182-600 991	


End Brushes

crimped wire



SPECIAL

End brushes for pin-point accuracy and hard-to-reach areas. Professional version.



USAGE

roughening	0,15
planing	0,20
deburring	0,25/0,27
edge honing	0,30
structuring	0,35
descaling/paint stripping	0,40
weld seams	0,50

TRIM AND MATERIAL

Products available with:

Steel wire crimped →

Stainless steel →

Brass wire →

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
-------	------------	-----------------	-------------------	-----------	-----------	-----------

mm	rpm	pcs.	0,20	RRP	0,30	RRP	0,50	RRP
Ø	T	L	Order-No.	€	Order-No.	€	Order-No.	€
10	20	40	20000	12	0003-509 141	0003-509 161	0003-509 191	
17	25	45	18000	12	0002-509 142	0002-509 162	0002-509 192	
25	25	50	18000	12	0002-509 143	0002-509 163	0002-509 193	
30	25	45	15000	12	0002-509 144	0002-509 164	0002-509 194	

mm	rpm	pcs.	0,20	RRP	0,30	RRP	0,30	RRP
Ø	T	L	Order-No.	€	Order-No.	€	Order-No.	€
10	20	40	20000	12	0003-509 341	0003-509 361	0003-509 561	
17	25	45	18000	12	0002-509 342	0002-509 362	0002-509 562	
25	25	50	18000	12	0002-509 343	0002-509 363	0002-509 563	
30	25	45	15000	12	0002-509 344	0002-509 364	0002-509 564	

Brushes

Power drill

BRUSHES

End Brushes

crimped wire



PERFECT

End brushes for pin-point accuracy and hard-to-reach areas. DIY version.



USAGE

roughening	<input type="checkbox"/>	0,15
planing	<input checked="" type="checkbox"/>	0,20
deburring	<input type="checkbox"/>	0,25/0,27
edge honing	<input checked="" type="checkbox"/>	0,30
structuring	<input type="checkbox"/>	0,35
descaling/paint stripping	<input type="checkbox"/>	0,40
weld seams	<input checked="" type="checkbox"/>	0,50

TRIM AND MATERIAL

Products available with:

Steel wire crimped




Steel	<input checked="" type="checkbox"/>
Cast steel	<input checked="" type="checkbox"/>
Stainless steel	<input checked="" type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>
Soft wood	<input checked="" type="checkbox"/>
Hard wood	<input checked="" type="checkbox"/>

Stainless steel



Ø	T	L	mm		max.		0,30		RRP	0,30		RRP
							Order-No.	€		Order-No.	€	
12	20	45		4500		20	0008-509 161					
17	25	45		4500		12	0008-509 162					
25	25	50		4500		12			0008-509 363			
25	30	50		4500		12	0008-509 163					
30	35	50		4500		12	0008-509 164					



End Brushes

crimped wire



PERFECT

End brushes for pin-point accuracy and hard-to-reach areas. DIY version in self-service packaging.



USAGE

roughening	<input type="checkbox"/>	0,15
planing	<input checked="" type="checkbox"/>	0,20
deburring	<input type="checkbox"/>	0,25/0,27
edge honing	<input type="checkbox"/>	0,30
structuring	<input type="checkbox"/>	0,35
descaling/paint stripping	<input type="checkbox"/>	0,40
weld seams	<input checked="" type="checkbox"/>	0,50

TRIM AND MATERIAL

Products available with:

Steel wire crimped



Steel	<input checked="" type="checkbox"/>
Cast steel	<input checked="" type="checkbox"/>
Stainless steel	<input checked="" type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>
Soft wood	<input checked="" type="checkbox"/>
Hard wood	<input checked="" type="checkbox"/>

Stainless steel



Ø	T	L	mm		max.		0,30		RRP	0,30		RRP
							Order-No.	€		Order-No.	€	
25	30	50		4500		12	1718-509 163			7008-509 363		



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de



Brushes

Power drill




USAGE							TRIM AND MATERIAL							
Ø	T	K	L	rpm	pcs.	Order-No.	0,30		Order-No.	€	Order-No.	€	Order-No.	€
							mm	max						
17	24	16	43	15000	12	0002-930 902								
24	23	23	43	15000	12	0002-930 907								
31	23	29	43	15000	12	0002-930 912								

Brush with plastic-bonded wire for longer service life and reduced wire breakage.

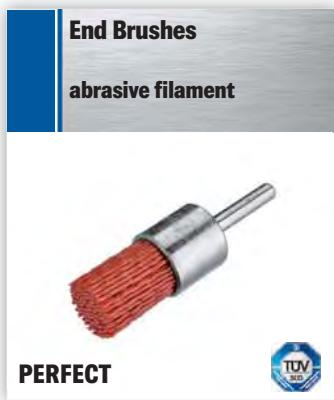

USAGE							TRIM AND MATERIAL							
Ø	T	K	L	rpm	pcs.	Order-No.	grit 80 red		Order-No.	€	grit 180 blue		Order-No.	€
							mm	max			Steel	Cast steel	Stainless steel	Non-ferrous metal
25	25	22	45	5000	12	0812-509 913			1812-509 913					

The trim on these brushes follows the contours of the work piece without significantly affecting the surface. Brushes with abrasive bristles for cleaning materials.



Brushes

Power drill

BRUSHES

End Brushes


abrasive filament



PERFECT



Do-it-yourself type for power drills in self-service packaging.



USAGE



roughening	40/46
planing	60
deburring	80
edge honing	120
structuring	180
descaling/paint stripping	320
weld seams	Fibre

TRIM AND MATERIAL

Products available with:

Abrasive bristle

Steel	Cast steel	Stainless steel	Non-ferrous metal
Aluminium	Soft wood	Hard wood	

Ø	T	K	L	rpm	max.	pcs.	grit 80 red	RRP	grit 180 blue	RRP
							Order-No.	€	Order-No.	€
25	25	22	45	5000	12	7812-509 913		7802-509 913		



End Brushes


abrasive filament



SPECIAL



End brushes with silicon carbide bristles
Professional, industrial quality version.



USAGE



roughening	40/46
planing	60
deburring	120
edge honing	180
structuring	320
descaling/paint stripping	Fibre
weld seams	

TRIM AND MATERIAL

Products available with:

Abrasive bristle

Steel	Cast steel	Stainless steel	Non-ferrous metal
Aluminium	Soft wood	Hard wood	


Ø	T	K	L	rpm	max.	pcs.	Novofil 120	RRP	Novofil 180	RRP	Novofil 320	RRP
							Order-No.	€	Order-No.	€	Order-No.	€
10	25	10	50	5000	12				1802-509 911		3202-509 911	
15	25	15	43	5000	12	1202-509 912		1802-509 912		3202-509 912		
22	25	22	50	5000	12	1202-509 913		1802-509 913		3202-509 913		
28	25	28	45	5000	12	1202-509 914		1802-509 914		3202-509 914		



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de


Brushes

Power drill

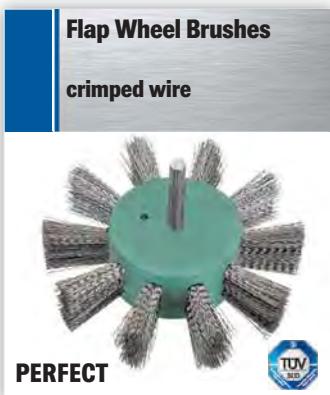


USAGE						TRIM AND MATERIAL					
						Products available with:					
						Steel wire crimped →					
roughening	0,15	0,20	0,25	0,27	0,30	0,35	0,40	0,50	Steel	Cast steel	Stainless steel
planing	■■■■■	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	Non-ferrous metal	Aluminum	
deburring	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	Soft wood		
edge honing	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	Hard wood		
structuring	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□			
descaling/paint stripping	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□			
weld seams	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■			
mm	max.			pcs.		0,30 steel wire	RRP	0,30 brass-coated	RRP		
Ø	A	T	rpm			Order-No.	€	Order-No.	€	Order-No.	€
100	23	25	3500			0004-401132		0004-401052			

Light and flexible flap wheel brushes with 25 mm operating width for power drills.



USAGE						TRIM AND MATERIAL					
						Products available with:					
						Abrasive bristle →					
						Natural bristle →					
mm	max.			pcs.		grit 80 red	RRP	grit 180 blue	RRP	fibre	RRP
Ø	A	T	rpm			Order-No.	€	Order-No.	€	Order-No.	€
100	23	25	3500			0001-401912		0011-401912		0004-401942	

Light and flexible flap wheel brushes with 25 mm operating width for power drills.



Brushes

Power drill

BRUSHES

Flap Wheel Brushes


abrasive / natural fibre



PERFECT



Do-it-yourself type for power drills in self-service packaging.



DIY Brush Set

5 pieces, crimped wire



PERFECT

Promotional set of five power drill brushes for metal processing in self-service packaging.

DIY Brush Set

5 pieces, abrasive filament



PERFECT

Promotional set of five power drill brushes for woodworking in self-service packaging.

NEW!

USAGE



roughening	40/46
planing	60
deburring	80
edge honing	120
structuring	180
descaling/paint stripping	320
weld seams	Fibre

mm

max

rpm

3500

pcs.

5

grit 80

red

RRP

€

Order-No.

7801-401 912

grit 180

blue

RRP

€

Order-No.

7811-401 912

TRIM AND MATERIAL

Products available with:

Abrasive bristle →

Natural bristle →

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■

USAGE



roughening	0,15
planing	0,20
deburring	0,25/0,27
edge honing	0,30
structuring	0,35
descaling/paint stripping	0,40
weld seams	0,50

mm

max

DIY brush set

Order-No.

4500

rpm

10

pcs.

1418-600 005

RRP

€

TRIM AND MATERIAL

Products available with:

Steel wire crimped →

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■

0,30

Ø

wheel brush

50

wheel brush

75

end brush

25

cup brush

50

cup brush

70



DIY Brush Set

5 pieces, abrasive filament



USAGE

roughening	40/46
planing	60
deburring	80
edge honing	120
structuring	180
descaling/paint stripping	320
weld seams	Fibre

mm

max

DIY brush set

Order-No.

4500

rpm

10

pcs.

1518-600 005

RRP

€

TRIM AND MATERIAL

Products available with:

Abrasive bristle →

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■

grit 80

Ø

wheel brush

50

wheel brush

75

end brush

25

cup brush

50

cup brush

75



Promotional set of five power drill brushes for woodworking in self-service packaging.

NEW!



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de


Brushes

Power drill



Ø	inch	F	S	pcs.	Order-No.	RRP				
						€	Order-No.	€	Order-No.	€
10		20	6	1	0003-000 100					
13		20	6	1	0003-000 130					
12,7	1/2 inch	20	6	1	0004-000 127					

For wheel brushes with arbor hole.
Brushes can be mounted up to a face width
of max. 20 mm.



Brushes

High-speed

BRUSHES



GENERAL INFORMATION	58
WHEEL BRUSHES	59
FLAP WHEELS	61
END BRUSHES	63

Brushes

High-speed



Important user information

Brushes for high-speed machines



To be noted when selecting brushes and using high-speed machines:

1. General user information

Thanks to their reinforced components and especially rigid clamping characteristics, the brushes on the following pages are suitable for high-speed drive units (e.g. straight grinders, pneumatic tools) and for all common brands.

2. Typical brushes for high-speed machines



Wheel brushes

Available with knotted and crimped wire.




End brushes

Available with knotted, abrasive and crimped wire, as well as extra-long shaft and special shapes.

Please note:

End brushes spread during operation.



The machine information on the packaging and displays

Details on machine suitability can also be found on the machine icons on Osborn packaging and counter and shelf displays.

Brushes

High-speed

BRUSHES

Wheel Brushes

knotted wire



SPECIAL



For heavy-duty cleaning and deburring applications such as slag and silicate removal, weld seam finishing or removal of the underfloor protection in motor vehicles.

USAGE



roughening	<input type="checkbox"/>	0.26
planing	<input checked="" type="checkbox"/>	0.35
deburring	<input checked="" type="checkbox"/>	0.60
edge honing	<input checked="" type="checkbox"/>	0.80
structuring	<input type="checkbox"/>	
descaling/paint stripping	<input type="checkbox"/>	
weld seams	<input checked="" type="checkbox"/>	

mm rpm pcs.

Ø A T B Shank rpm pcs.

75 12 18 6 20000 12

TRIM AND MATERIAL

Products available with:

Steel wire twist knot



Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
<input checked="" type="checkbox"/>						

Stainless steel



Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
<input checked="" type="checkbox"/>						

0,35	RRP	0,50	RRP	0,50	RRP
Order-No. 0202-611 131	€	Order-No. 0202-611 151	€	Order-No. 0202-611 351	€

Wheel Brushes

crimped wire



SPECIAL



Recommended working speed approx. 50% of maximum RPM. For non-destructive and light cleaning work, deburring and processing bores.

USAGE



roughening	<input type="checkbox"/>	0.15
planing	<input checked="" type="checkbox"/>	0.20
deburring	<input checked="" type="checkbox"/>	0.25/0.27
edge honing	<input checked="" type="checkbox"/>	0.30
structuring	<input type="checkbox"/>	0.35
descaling/paint stripping	<input type="checkbox"/>	0.40
weld seams	<input checked="" type="checkbox"/>	0.50

mm rpm pcs.

Ø A T B Shank rpm pcs.

TRIM AND MATERIAL

Products available with:

Steel wire crimped



Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
<input checked="" type="checkbox"/>						

Stainless steel



Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
<input checked="" type="checkbox"/>						

0,15	RRP	0,20	RRP	0,30	RRP
Order-No. 0002-501 132	€	Order-No. 0002-501 142	€	Order-No. 0002-504 161	€

20	6	4	20000	10	0002-501 142
20	9	4	20000	10	0002-501 143
30	6	6	20000	10	0002-502 141
30	9	6	20000	10	0002-502 142
30	12	6	20000	10	0002-502 143
40	11	10	18000	10	0002-503 142
40	16	10	18000	10	0002-503 143
50	10	13	15000	10	0002-504 141
50	17	13	15000	10	0002-504 142
50	23	13	15000	10	0002-504 143
60	12	15	15000	10	0002-505 141
60	18	15	15000	10	0002-505 142
70	11	15	15000	10	0002-506 141
70	18	15	15000	10	0002-506 142
80	19	20	15000	10	0002-507 162


Continue next page.




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

High-speed

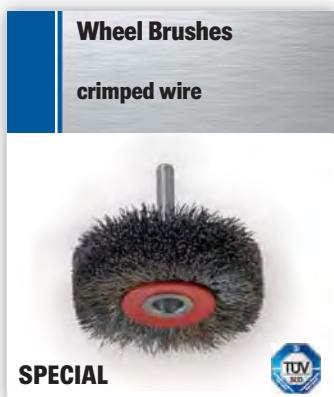

Recommended working speed approx. 50% of maximum RPM. For non-destructive and light cleaning work, deburring and processing bores.

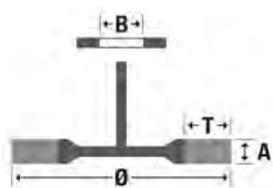


USAGE								TRIM AND MATERIAL							
roughening planing deburring edge honing structuring descaling/paint stripping weld seams								0,15 0,20 0,30							
roughening	planing	deburring	edge honing	structuring	descaling/paint stripping	weld seams	0,15	0,20	0,30	RRP	RRP	RRP	RRP	RRP	RRP
0,20	0,25/0,27	0,30	0,35	0,40	0,50		€	€	€	Order-No.	Order-No.	Order-No.	Order-No.	Order-No.	Order-No.
0,25	0,30	0,35	0,40	0,50						0002-502 341	0002-502 342	0002-502 343	0002-503 341	0002-503 342	0002-503 343
0,30	0,35	0,40	0,50							0002-502 332	0002-502 333	0002-502 333	0002-503 331	0002-503 332	0002-503 333
0,35	0,40	0,50								0002-502 341	0002-502 342	0002-502 343	0002-503 341	0002-503 342	0002-503 343
0,40	0,50									0002-502 342	0002-502 343	0002-502 343	0002-503 341	0002-503 342	0002-503 343
0,50										0002-504 332	0002-504 341	0002-504 342	0002-504 343	0002-504 361	0002-504 362
										0002-504 343	0002-504 361	0002-504 362	0002-505 341	0002-505 342	0002-505 361
										0002-505 332	0002-505 342	0002-505 362	0002-505 343	0002-505 361	0002-505 363
										0002-505 341	0002-505 342	0002-505 361	0002-506 341	0002-506 342	0002-506 362
										0002-506 332	0002-506 342	0002-506 362	0002-506 343	0002-506 361	0002-506 363
										0002-507 342	0002-507 342	0002-507 342	5162-507 361	5162-507 361	0002-507 362

mm								0,15		0,20	
Ø	A	T	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
30	6	6	20000	10	0002-502 341						
30	9	6	20000	10	0002-502 342						
30	12	6	20000	10	0002-502 343						
40	7	10	18000	10	0002-503 331						
40	11	10	18000	10	0002-503 332						
40	16	10	18000	10	0002-503 333						
50	10	13	15000	10	0002-504 332						
50	17	13	15000	10	0002-504 342						
50	23	13	15000	10	0002-504 343						
60	12	15	15000	10	0002-505 341						
60	18	15	15000	10	0002-505 342						
60	23	15	15000	10	0002-505 343						
70	11	15	15000	10	0002-506 341						
70	18	15	15000	10	0002-506 342						
70	23	15	15000	10	0002-506 343						
80	10	20	12000	10							
80	19	20	12000	10	0002-507 342						

mm								0,20		RRP	
Ø	A	T	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
30	9	6	20000	10	0002-502 542						
40	11	10	18000	10	0002-503 542						
50	17	13	15000	10	0002-504 542						
60	18	15	15000	10	0002-505 542						
70	18	15	15000	10	0002-506 542						
80	19	20	12000	10	0002-507 542						



Silicon carbide abrasive bristle for deburring, edge rounding and surface finishing. Also suitable for non-ferrous metals.

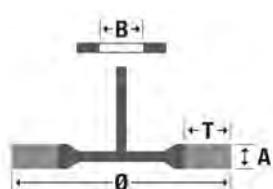

mm								grit 120		RRP		grit 180		RRP		grit 320		RRP	
Ø	A	T	B	s	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	
38	10	6	1/2"	6	20000	12	9906-011 146		9906-011 147		9906-011 148								
50	10	11	5/8"	6	15000	12	9906-011 149		9906-011 150		9906-011 151								
63	13	17	5/8"	6	15000	12	9906-011 153		9906-011 154		9906-011 155								


mm								grit 120		RRP		grit 180		RRP		grit 320		RRP	
Ø	A	T	S	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€		
38	10	6	6	20000	10	9906-011 446		9906-011 447		9906-011 448									
50	10	11	6	15000	10	9906-011 449		9906-011 450		9906-011 451									
63	13	17	6	15000	10	9906-011 453		9906-011 454		9906-011 455									

Brushes

High-speed



Flap wheels are suited for surface finishing of most component parts our of steel, nonferrous metals, wood and hard plastics. With aluminium oxide.



Ø	A	S	mm	rpm	pcs.	grit	RRP	grit	RRP	grit	RRP
						40	Order-No.	€	60	Order-No.	€
30	10	6	25400	10	0043-003 010	0063-003 010		0083-003 010	0063-003 015	0083-003 015	
30	15	6	25400	10	0043-003 015						
40	15	6	19100	10	0043-004 015				0063-004 015	0083-004 015	
40	20	6	19100	10	0043-004 020				0063-004 020	0083-004 020	
40	30	6	17000	10	0063-004 030				0083-004 030	0123-004 030	
50	15	6	15200	10	0043-005 015				0063-005 015	0083-005 015	
50	20	6	15200	10	0043-005 020				0063-005 020	0083-005 020	
50	30	6	15200	10	0043-005 030				0063-005 030	0083-005 030	
60	20	6	12700	10	0043-006 020				0063-006 020	0083-006 020	
60	30	6	12700	10	0043-006 030				0063-006 030	0083-006 030	
60	40	6	12700	10	0043-006 040				0063-006 040	0083-006 040	
60	50	6	12700	10	0043-006 050				0063-006 050	0083-006 050	
80	30	6	8900	10	0043-008 030				0063-008 030	0083-008 030	
80	40	6	8900	10	0043-008 040				0063-008 040	0083-008 040	
80	50	6	8900	10	0043-008 050				0063-008 050	0083-008 050	

Ø	A	S	mm	rpm	pcs.	grit	RRP	grit	RRP	grit	RRP
						120	Order-No.	€	150	Order-No.	€
30	10	6	25400	10	0123-003 010			0153-003 010	0183-003 010		
30	15	6	25400	10	0123-003 015			0153-003 015	0183-003 015		
40	15	6	19100	10	0123-004 015			0153-004 015	0183-004 015		
40	20	6	19100	10	0123-004 020			0153-004 020	0183-004 020		
50	15	6	15200	10	0123-005 015			0153-005 015	0183-005 015		
50	20	6	15200	10	0123-005 020			0153-005 020	0183-005 020		
50	30	6	15200	10	0123-005 030			0153-005 030	0183-005 030		
60	20	6	12700	10	0123-006 020			0153-006 020	0183-006 020		
60	30	6	12700	10	0123-006 030			0153-006 030	0183-006 030		
60	40	6	12700	10	0123-006 040			0153-006 040	0183-006 040		
60	50	6	12700	10	0123-006 050			0153-006 050	0183-006 050		
80	30	6	8900	10	0123-008 030			0153-008 030	0183-008 030		
80	40	6	8900	10	0123-008 040			0153-008 040	0183-008 040		
80	50	6	8900	10	0123-008 050			0153-008 050	0183-008 050		

Ø	A	S	mm	rpm	pcs.	grit	RRP				
						240	Order-No.	€	Order-No.	€	Order-No.
30	10	6	25400	10	0243-003 010						
30	15	6	25400	10	0243-003 015						
40	15	6	19100	10	0243-004 015						
40	20	6	19100	10	0243-004 020						
50	15	6	15200	10	0243-005 015						
50	20	6	15200	10	0243-005 020						
50	30	6	15200	10	0243-005 030						
60	20	6	12700	10	0243-006 020						
60	30	6	12700	10	0243-006 030						
60	40	6	12700	10	0243-006 040						
60	50	6	12700	10	0243-006 050						
80	30	6	8900	10	0243-008 030						
80	40	6	8900	10	0243-008 040						
80	50	6	8900	10	0243-008 050						




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

High-speed



Flap wheels with combined material:
non-woven and abrasive cloth flaps for a fine
surface pattern and as preparation for
satinizing.




mm			rpm	pcs.	grit 60	RRP	grit 80	RRP	grit 150	RRP
Ø	A	S			Order-No.	€	Order-No.	€	Order-No.	€
40	20	6	17100	10	0063-404 020	0083-404 020	0153-404 020			
40	30	6	17100	10	0063-404 030	0083-404 030	0153-404 030			
50	20	6	13700	10	0063-405 020	0083-405 020	0153-405 020			
50	30	6	13700	10	0063-405 030	0083-405 030	0153-405 030			
50	40	6	13700	10	0063-405 040	0083-405 040	0153-405 040			
60	30	6	11500	10	0063-406 030	0083-406 030	0153-406 030			
60	40	6	11500	10	0063-406 040	0083-406 040	0153-406 040			
60	50	6	11500	10	0063-406 050	0083-406 050	0153-406 050			
80	40	6	8600	10	0063-408 040	0083-408 040	0153-408 040			
80	50	6	8600	10	0063-408 050	0083-408 050	0153-408 050			

mm			rpm	pcs.	grit 240	RRP				
Ø	A	S			Order-No.	€	Order-No.	€	Order-No.	€
40	20	6	17100	10	1243-404 020					
40	30	6	17100	10	1243-404 030					
50	20	6	13700	10	1243-405 020					
50	30	6	13700	10	1243-405 030					
50	40	6	13700	10	1243-405 040					
60	30	6	11500	10	1243-406 030					
60	40	6	11500	10	1243-406 040					
60	50	6	11500	10	1243-406 050					
80	40	6	8600	10	1243-408 040					
80	50	6	8600	10	1243-408 050					



Flap wheels of abrasive fleece are especially suited for surface cleaning. On metal surfaces, they produce a grinding finish with a high density. With aluminium oxide.



mm			rpm	pcs.	coarse	RRP	medium	RRP	fine	RRP
Ø	A	S			Order-No.	€	Order-No.	€	Order-No.	€
40	20	6	17100	10	0083-304 020	0153-304 020	0243-304 020			
40	30	6	17100	10	0083-304 030	0153-304 030	0243-304 030			
50	30	6	13700	10	0083-305 030	0153-305 030	0243-305 030			
50	40	6	13700	10	0083-305 040	0153-305 040	0243-305 040			
60	30	6	11500	10	0083-306 030	0153-306 030	0243-306 030			
60	50	6	11500	10	0083-306 050	0153-306 050	0243-306 050			
80	50	6	8600	10	0083-308 050	0153-308 050	0243-308 050			

mm			rpm	pcs.	very fine	RRP				
Ø	A	S			Order-No.	€	Order-No.	€	Order-No.	€
40	20	6	17100	10	0323-304 020					
40	30	6	17100	10	0323-304 030					
50	30	6	13700	10	0323-305 030					
50	40	6	13700	10	0323-305 040					
60	30	6	11500	10	0323-306 030					
60	50	6	11500	10	0323-306 050					
80	50	6	8600	10	0323-308 050					

Important:

Grit fleece	Comparable grit (FEPA)
coarse	80–120
medium	150–220
fine	240–360
very fine	400–600

Brushes

High-speed

BRUSHES

End Brushes

knotted wire



SPECIAL

USAGE



	0,26	0,35
roughening	□	□
planing	■ ■	□ □
deburring	■ ■	□ □
edge honing	■ ■	□ □
structuring	□ □ □	□ □ □
descaling/paint stripping	■ ■ ■	■ ■ ■
weld seams	■ ■ ■	■ ■ ■

TRIM AND MATERIAL

Products available with:


Steel wire twist knot

Stainless steel

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■

mm	rpm	pcs.	0,26	RRP	0,35	RRP
Ø	T	L	Order-No.	€	Order-No.	€
20	29	44	0002-630 328			
23	29	44	0002-630 334		0002-630 335	
30	29	44	0002-630 340		0002-630 341	

Altering the RPMs means that the diameter can also be varied.



mm	rpm	pcs.	0,26	RRP	0,35	RRP
Ø	T	L	Order-No.	€	Order-No.	€
20	29	44	0002-630 304		0002-630 305	
23	29	44	0002-630 310		0002-630 311	
30	29	44	0002-630 316		0002-630 317	

End Brushes

knotted Osborn wire



EVOLUTION

USAGE



	0,26	0,35
roughening	□ □	□ □
planing	■ ■	□ □
deburring	■ ■	□ □
edge honing	■ ■	□ □
structuring	□ □ □	□ □ □
descaling/paint stripping	■ ■ ■	■ ■ ■
weld seams	■ ■ ■	■ ■ ■

TRIM AND MATERIAL

Products available with:

Steel wire twist knot

Stainless steel

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■

mm	rpm	pcs.	Osborn 0,15	RRP	Osborn 0,26	RRP	Osborn 0,35	RRP	
Ø	L	T	S	Order-No.	€	Order-No.	€	Order-No.	€
20	44	29	6	20000	12	9906-030 302		9906-030 305	
23	44	29	6	20000	12	9906-030 308		9906-030 311	
30	44	29	6	20000	12	9906-030 314		9906-030 317	

RUFTUF® with Original Osborn steel wire – a high performance wire developed by Osborn.




mm	rpm	pcs.	Osborn 0,50	RRP					
Ø	L	T	S	Order-No.	€	Order-No.	€	Order-No.	€
23	44	29	6	20000	12	9906-030 312		9906-030 318	
30	44	29	6	20000	12				

Important:

Brushes flare during operation (see picture)

Information on the grade of flaring in relation to the body-diameter and operating speed, please see table.

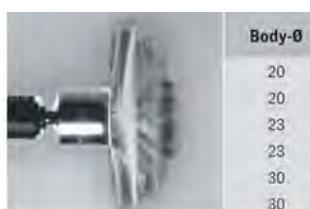

Body-Ø	Wire size	At Speed ≤ min⁻¹ 5000	At Speed ≤ min⁻¹ 8000	At Speed ≤ min⁻¹ 15000
20	0,26	55	70	75
20	0,35	25	50	70
23	0,26	40	65	75
23	0,35	35	55	70
30	0,26	55	70	85
30	0,35	50	70	80


Recommended operating speed approx. 50% of the maximum rpm.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushes

High-speed

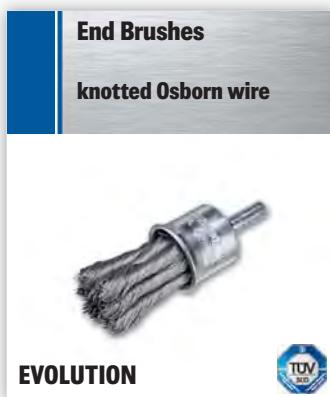


USAGE		TRIM AND MATERIAL									
		Products available with: Steel wire twist knot → Steel Stainless steel → Cast steel Non/ferrous metal Aluminum Soft wood Hard wood									

mm						Osborn 0,15 *		RRP		Osborn 0,26 *		RRP		Osborn 0,35 *		RRP	
Ø	L	T	S	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€		
20	44	29	6	20000	12	9906-030 326		9906-030 328		9906-030 329							
23	44	29	6	20000	12	9906-030 332		9906-030 334		9906-030 335							
30	44	29	6	20000	12	9906-030 338		9906-030 340		9906-030 341							

* stainless steel version degreased.

RUFTUF® with Original Osborn steel wire
– a high performance wire developed by Osborn.




Important:

Brushes flare during operation (see picture)

Information on the grade of flaring in relation to the body-diameter and operating speed, please see table.

Body-Ø	Wire size	At Speed $\leq \text{min}^{-1} 5000$		At Speed $\leq \text{min}^{-1} 8000$		At Speed $\leq \text{min}^{-1} 15000$	
		55	70	50	65	70	85
20	0,26	55	70	50	65	70	85
20	0,35	25	35	25	35	35	50
23	0,26	40	55	40	55	55	70
23	0,35	35	55	35	55	55	70
30	0,26	55	70	55	70	70	85
30	0,35	50	70	50	70	70	80

Recommended operating speed approx. 50% of the maximum rpm.

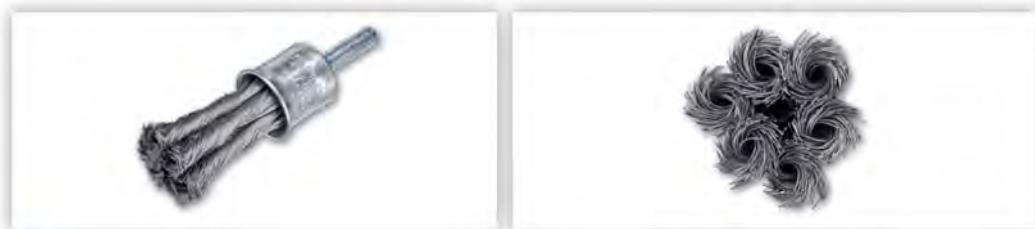

RUFTUF® end brushes are now also available with special rose bud twist. Available in steel wire and stainless steel wire, different wire diameters. Please contact us.

Brushes

High-speed


End Brushes

knotted wire



SPECIAL

Ideal for hard-to-reach areas. Extra-long tapered shank. Knotted wire.



USAGE



roughening	<input type="checkbox"/>	0,26
planing	<input checked="" type="checkbox"/>	0,35
deburring	<input type="checkbox"/>	0,50
edge honing	<input checked="" type="checkbox"/>	0,60
structuring	<input type="checkbox"/>	0,80
descaling/paint stripping	<input type="checkbox"/>	
weld seams	<input checked="" type="checkbox"/>	

TRIM AND MATERIAL

Products available with:

Steel wire twist knot



Steel	<input checked="" type="checkbox"/>
Cast steel	<input type="checkbox"/>
Stainless steel	<input checked="" type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>
Soft wood	<input checked="" type="checkbox"/>
Hard wood	<input type="checkbox"/>

Stainless steel



		mm	rpm	pcs.	0,25	RRP	0,35	RRP	0,50	RRP
Ø	T	L			Order-No.	€	Order-No.	€	Order-No.	€
10	26	72	15000	12	9803-630 151		9803-630 171		9803-630 101	

		mm	rpm	pcs.	0,25	RRP	0,35	RRP	0,50	RRP
Ø	T	L			Order-No.	€	Order-No.	€	Order-No.	€
10	26	72	15000	12	9803-630 351		9803-630 371		9803-630 301	


End Brushes

crimped wire



SPECIAL

Extra-long tapered shank.



USAGE



roughening	<input type="checkbox"/>	0,15
planing	<input checked="" type="checkbox"/>	0,20
deburring	<input type="checkbox"/>	0,25/0,27
edge honing	<input type="checkbox"/>	0,30
structuring	<input checked="" type="checkbox"/>	0,35
descaling/paint stripping	<input type="checkbox"/>	0,40
weld seams	<input checked="" type="checkbox"/>	0,50

TRIM AND MATERIAL

Products available with:

Steel wire crimped



Steel	<input checked="" type="checkbox"/>
Cast steel	<input checked="" type="checkbox"/>
Stainless steel	<input type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>
Soft wood	<input checked="" type="checkbox"/>
Hard wood	<input checked="" type="checkbox"/>

Stainless steel



		mm	rpm	pcs.	0,20	RRP	0,30	RRP
Ø	T	L			Order-No.	€	Order-No.	€
10	20	100	9000	10	0003-509 149		0003-509 169	


		mm	rpm	pcs.	0,20	RRP	0,30	RRP
Ø	T	L			Order-No.	€	Order-No.	€
10	20	100	9000	10	0003-509 349		0003-509 369	



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de


Brushes

High-speed

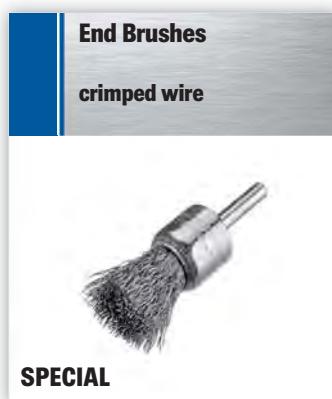

		USAGE		TRIM AND MATERIAL									
				roughening	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50		
				planing	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				deburring	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				edge honing	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				structuring	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				descaling/paint stripping	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				weld seams	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■

End brushes for pin-point accuracy and hard-to-reach areas. Professional version.




mm		max.		0,20		RRP		0,30		RRP		0,50		RRP	
Ø	T	L	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	
10	20	40	20000	12	0003-509 141		0003-509 161		0003-509 191						
17	25	45	18000	12	0002-509 142		0002-509 162		0002-509 192						
25	25	50	18000	12	0002-509 143		0002-509 163		0002-509 193						
30	25	45	15000	12	0002-509 144		0002-509 164		0002-509 194						

mm		max.		0,20		RRP		0,30		RRP		0,30		RRP	
Ø	T	L	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	
10	20	40	20000	12	0003-509 341		0003-509 361		0003-509 561						
17	25	45	18000	12	0002-509 342		0002-509 362		0002-509 562						
25	25	50	18000	12	0002-509 343		0002-509 363		0002-509 563						
30	25	45	15000	12	0003-509 561		0002-509 364		0002-509 564						




		USAGE		TRIM AND MATERIAL									
				roughening	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50		
				planing	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				deburring	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				edge honing	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				structuring	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				descaling/paint stripping	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
				weld seams	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■

Products available with:
Steel wire crimped → Steel
Stainless steel → Stainless steel
Brass wire → Brass



mm		max.		0,30		RRP	
Ø	L	rpm	pcs.	Order-No.	€	Order-No.	€
50	45	15000	5	0002-509 165			
70	45	15000	5	0002-509 167			

Special design for dressing rounded welds or indentations.



Brushes

High-speed

End Brushes

crimped wire



SPECIAL

Flat shape, high form stability.



USAGE



	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50
roughening	□	□	□	□	□	■	■
planing	■	■	■	■	■	■	■
deburring	□	■	■	■	■	■	■
edge honing	□	■	■	■	■	■	■
structuring	□	□	□	□	□	□	□
descaling/paint stripping	□	□	□	□	■	■	■
weld seams	□	■	■	■	■	■	■

TRIM AND MATERIAL

Products available with:

Steel wire crimped ➔

Stainless steel ➔

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■

Ø	T	L	Typ	rpm	pcs.	0,40	RRP	Order-No.	€	Order-No.	€	Order-No.	€
						Order-No.	RRP						
8	29	57		12000	12	0024-509 101							
9,5	29	55		12000	12	0024-509 102							
10	27	158		12000	6	1224-509 101							
12	29	60		12000	12	0024-509 111							
12	55	55		12000	6	0014-509 102							
20	25	47		12000	6	0024-509 103							

End Brushes

straight/crimped wire



SPECIAL

Sharp shape, high stability.



USAGE



	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50
roughening	□	□	□	□	■	■	■
planing	■	■	■	■	■	■	■
deburring	□	■	■	■	■	■	■
edge honing	□	■	■	■	■	■	■
structuring	□	□	□	□	□	□	□
descaling/paint stripping	□	□	■	■	■	■	■
weld seams	□	■	■	■	■	■	■

TRIM AND MATERIAL

Products available with:

Steel wire crimped ➔

Stainless steel ➔

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■

Ø	T	L	Typ	rpm	pcs.	0,40	RRP	Order-No.	€	Order-No.	€	Order-No.	€
						Order-No.	RRP						
9,5	32	57	122 P	12000	12	0124-509 101							
10	27	125	121 P/L	7000	6	2224-509 101							
10	31	55	123 P	12000	12	0224-509 101							
12	30	61	124 P	12000	12	0124-509 111							
19	31	51	102 P	12000	6					0124-509 103			
19	64	50	225	12000	6					0024-509 100			

Ø	T	L	Typ	rpm	pcs.	0,30	RRP	Order-No.	€	Order-No.	€	Order-No.	€
						Order-No.	RRP						
9,5	32	57	122 P	12000	12	0074-509 301							
11	32	59	103 P	12000	6					0004-509 302 *			
19	31	51	102 P	12000	6					0124-509 303			
25	35	50	103 P	12000	6					0014-509 304			

* straight wire.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de


Brushes

High-speed



		USAGE		TRIM AND MATERIAL												
				Products available with:						Abrasive bristle						
										Steel	Cast steel	Stainless steel	Non/ferrous metal	Aluminum	Soft wood	Hard wood
Ø	L	T	S	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	
10	45	25	6	8000	12	9906-030 488		9906-030 489		9906-030 490						
15	45	25	6	5000	12	9906-030 492		9906-030 493		9906-030 494						
22	45	25	6	5000	12	9906-030 496		9906-030 497		9906-030 498						
28	45	25	6	5000	12	9906-030 500		9906-030 501		9906-030 502						


Silicon carbide abrasive bristle for deburring, edge rounding and surface finishing. Also suitable for non-ferrous metals.



Machine brushes

Satin finishing drums

BRUSHES

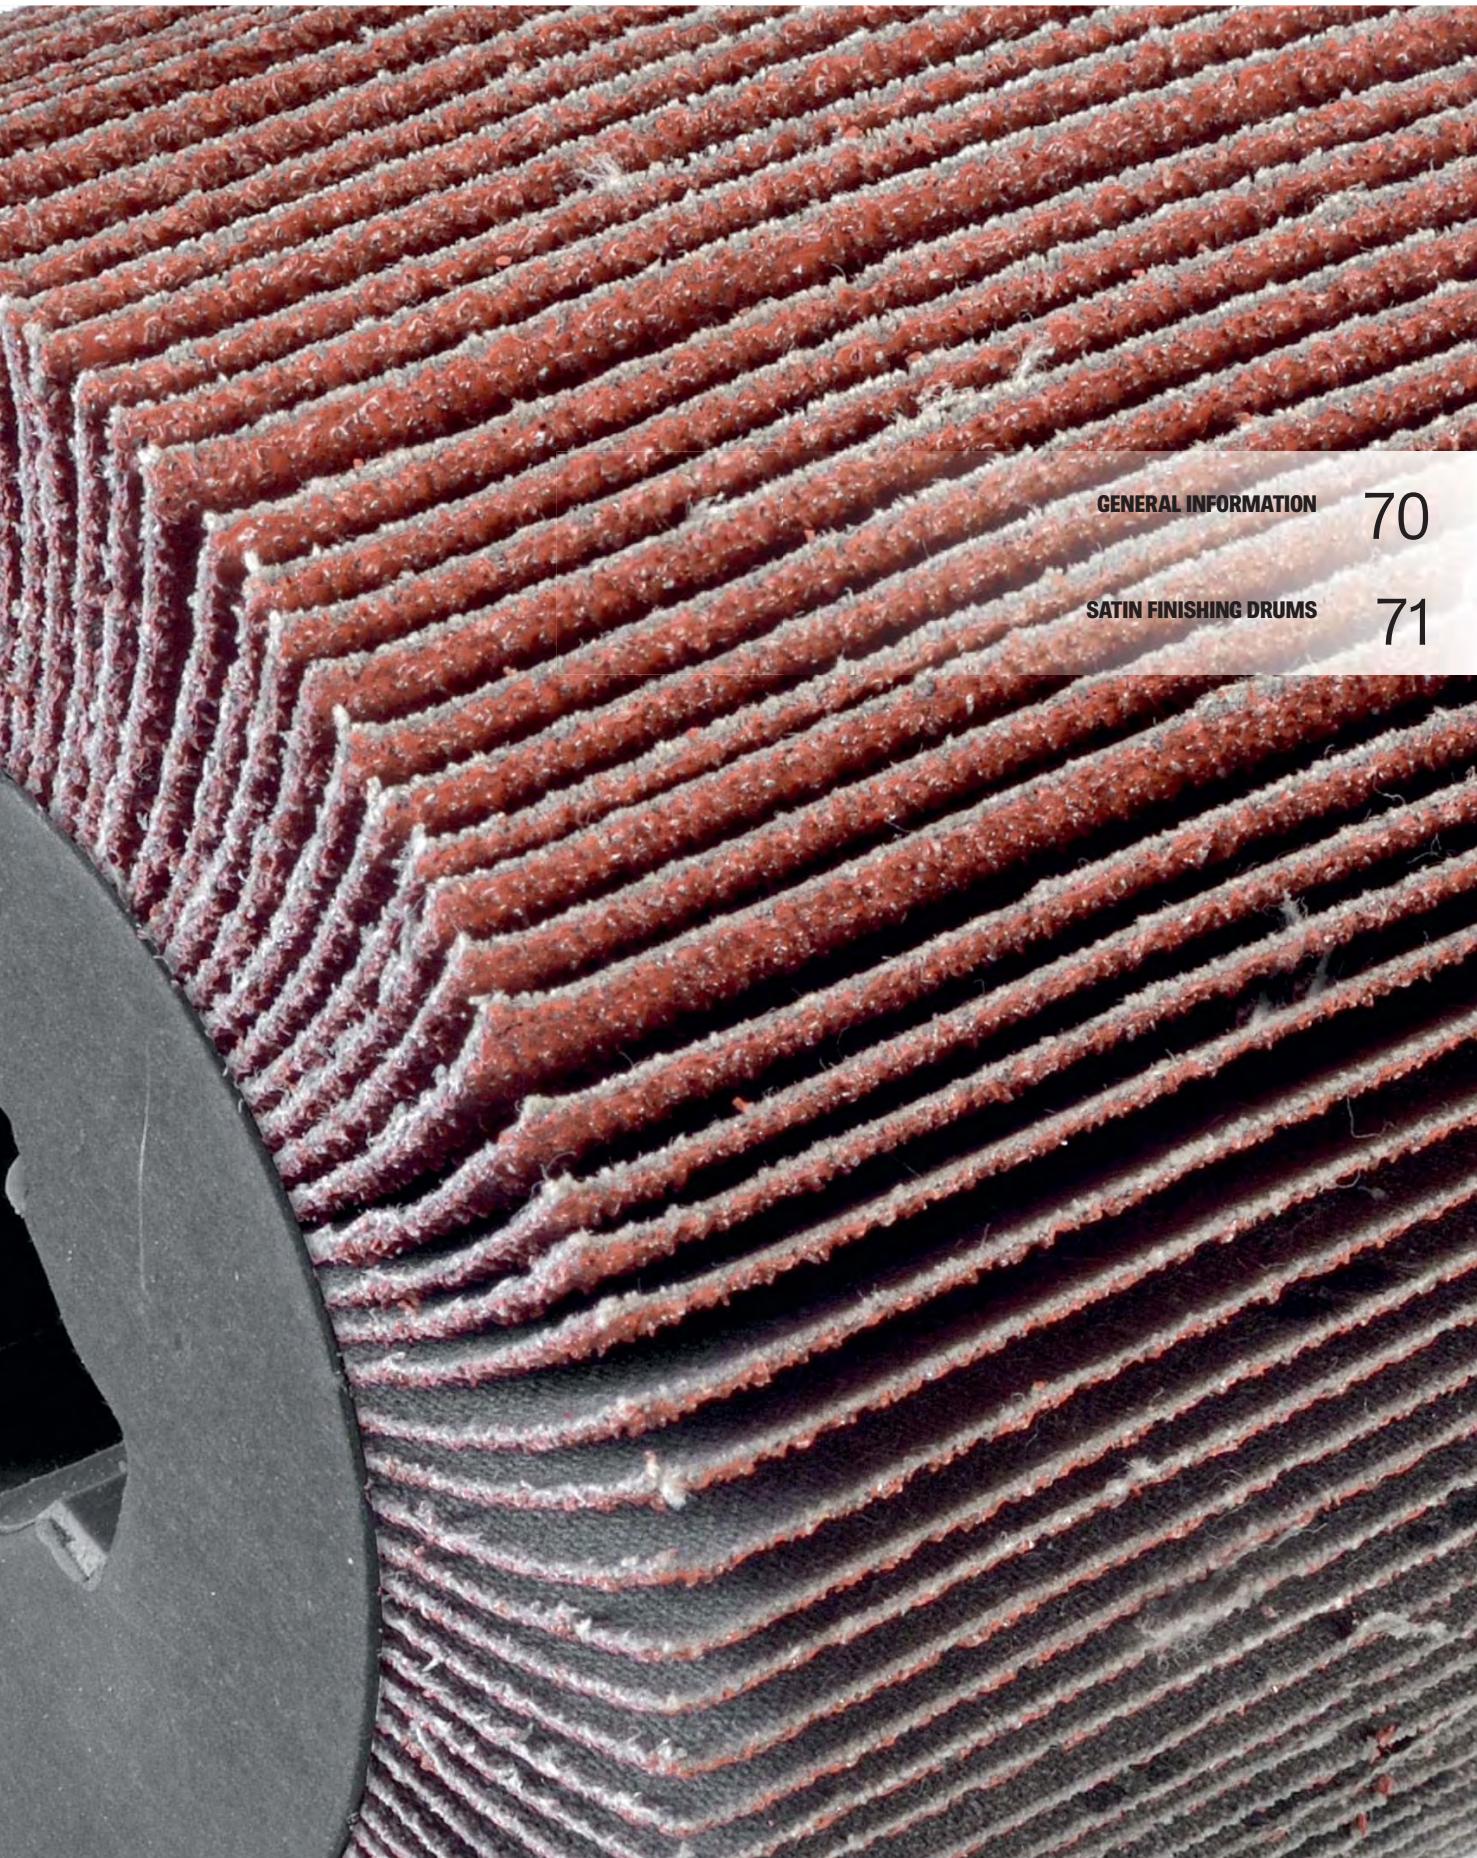

GENERAL INFORMATION

70

SATIN FINISHING DRUMS

71



Machine brushes

Satin finishing drums – general information



Important user information

Satin finishing drums for satinisers



To be noted when selecting grinding tools and using satinisers:

Satinising is a one-stage system for creating flat surfaces. The main considerations when selecting the satinising tools is the question of how the original surface should look like after your finishing process.

There are three possible finishing grades when satinising a surface:


Coarse



Medium



Fine

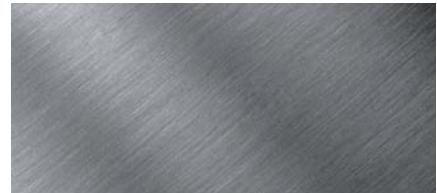

1. General user information

These products can be fitted simply and easily thanks to their 19/6 bore (with 4 keyways) which suits all common satinisers.

2. Typical product for satinisers

Abrasive cloth rollers

Abrasive cloth rollers offer the advantages of a flexible abrasive cloth.

Thanks to their open and flexible structure, they conform perfectly to the workpiece being ground.

They are suitable for coarse, medium, fine and superfine grinding.

For pregrinding we recommend our satin finishing drums with grit 60/80 und 120.



3. Advantage of the cylinder shape

Peripheral grinding in comparison to face grinding makes for a very nice grinding surface pattern. The working width of 100 mm is in addition absolutely ideal to work larger surfaces.

Machine brushes

Satin finishing drums

Satin Finishing Drum
abrasive



Satin Finishing Drum with bore 19 and 4 keyways.
To be used for pre-grinding and structuring.
Can also be used for deburring.

mm	∅	A	B	rpm	pcs.	grit 40	RRP	grit 60	RRP	grit 80	RRP
∅	Order-No.	€	Order-No.	€	Order-No.	€					
100	100	19	5700	1	0043-010 100		0063-010 100		0083-010 100		

mm	∅	A	B	rpm	pcs.	grit 120	RRP	grit 180	RRP	grit 240	RRP
∅	Order-No.	€	Order-No.	€	Order-No.	€					
100	100	19	5700	1	0123-010 100		0183-010 100		0243-010 100		

Satin Finishing Drum
combined material



Satin Finishing Drum with combined material:
non-woven and abrasive cloth flaps for a fine
surface pattern and as preparation for satinizing.

mm	∅	A	B	rpm	pcs.	K60/C	RRP	K80/M	RRP	K120/F	RRP
∅	Order-No.	€	Order-No.	€	Order-No.	€					
100	100	19	5700	1	0063-410 100		0083-410 100		0123-410 100		

mm	∅	A	B	rpm	pcs.	K180/Vf	RRP			
∅	Order-No.	€	Order-No.	€	Order-No.	€				
100	100	19	5700	1	0183-410 100					

Satin Finishing Drum
non-woven



Drum with non-woven flaps.
To create a matt or satin finishing.

mm	∅	A	B	rpm	pcs.	coarse	RRP	medium	RRP	very fine	RRP
∅	Order-No.	€	Order-No.	€	Order-No.	€					
100	100	19	5700	1	0083-310 100		0183-310 100		0283-310 100		



Machine brushes

Satin finishing drums



						mm	Ø	max.	Novofil NHS 60	RRP	Novofil NHS 80	RRP	Novofil NHS 120	RRP
Ø	A	T	B	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	
100	100	20	19		1	6931-401 912		6941-401 912		6951-401 912				
100	120	20	12,7		1	8611-411 912		8601-411 912		3901-411 912				

Roller brush for roughening, grinding and structuring of wood.
Brushes used for brush sanders (e.g. Metabo, Eisenblätter, Makita, etc.). Please consider correct working width.



						mm	Ø	max.	cordwire 0,27	RRP	0,20	RRP
Ø	A	T	B	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
100	70	17,5	19	8000	1	9803-523 056		9803-523 346				
100	120	16	12,7		1	4802-703 062		4802-703 052				

For roughening, deburring, cleaning of weld seams and paintstripping.



GENERAL INFORMATION	74
HAND SCRATCH BRUSHES	75
BUTCHERSBRUSHES	82
BROOMS	83
OTHERS	85

Hand brushes



Important user information

Brushes for manual use / hand brushes



To be noted when selecting brushes and using manual hand brushes:

1. General user information

Our hand brushes are suitable for all manual work such as deburring, cleaning, rust or paint removal. We also have brushes for various kinds of painting and decorating.

2. Typical brush types for manual use



Hand brushes

Available with wood or plastic body and handle.




Brooms

Available with wire or nylon trim, plus floor and scrubbing brushes.




Bristles

Available with flat, round and special bristles.

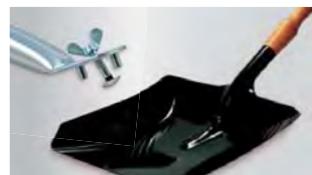

Accessories

We also have a selection of useful accessories.

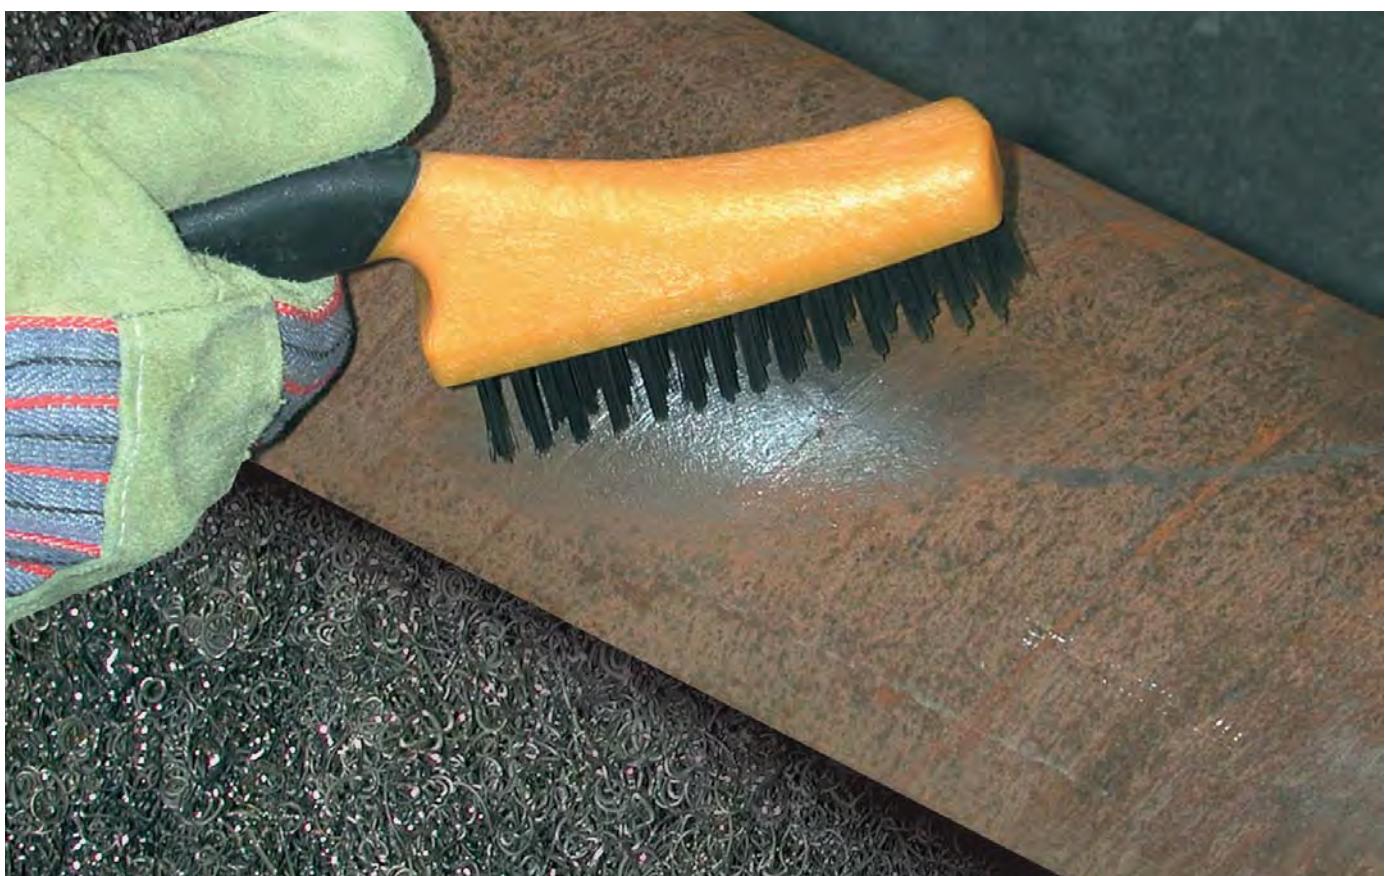


Hand Scratch Brushes

plastic handle



PERFECT

All-round brush with plastic handle for all sorts of cleaning applications.

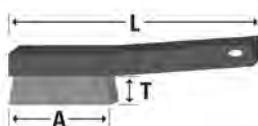

USAGE

	wire crimped/smooth	brass	flat wire	scratch strip	Nylon/PVC	natural bristle	phosphorbronze
descaling/paint stripping	■	□	□	□	□	□	□
weld seams	■	□	□	□	□	□	□
etching	□	□	□	□	□	□	■
brushing/dust removal	□	■	□	□	□	□	□
painting	□	□	□	□	□	□	□
light cleaning work	■	■	■	■	■	■	■

TRIM AND MATERIAL

Products available with:

Steel wire	■	■	■	■	■	■
Stainless steel	■	■	■	■	■	■
Brass wire	■	■	■	■	■	■

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■

mm	A	T	L	Rows	pcs.	0,30	RRP	0,30	RRP	0,30	RRP			
						crimped	Order-No.	€	crimped	Order-No.	€			
	140	25	265	1	24	0,30 crimped	0008-462 291	RRP	0,30 crimped	0008-462 391	RRP	0,30 crimped	0008-462 591	RRP

mm	A	T	L	Rows	pcs.	0,30	RRP					
						brass-coated	Order-No.	€	Order-No.	€	Order-No.	€
	140	25	265	1	24	0,30 brass-coated	0008-462 091	RRP				


Hand Scratch Brushes

plastic handle



SPECIAL

Ergonomically shaped plastic handle.
Dirt resistant.

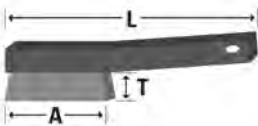

USAGE

	wire crimped/smooth	brass	flat wire	scratch strip	Nylon/PVC	natural bristle	phosphorbronze
descaling/paint stripping	■	□	□	□	□	□	□
weld seams	■	□	□	□	□	□	□
etching	□	□	□	□	□	□	■
brushing/dust removal	□	■	□	□	□	□	□
painting	□	□	□	□	□	□	□
light cleaning work	■	■	■	■	■	■	■

TRIM AND MATERIAL

Products available with:

Steel wire	■	■	■	■	■	■
Stainless steel	■	■	■	■	■	■
Brass wire	■	■	■	■	■	■

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■

mm	A	T	L	Rows	pcs.	0,35	RRP	0,30	RRP	0,20	RRP			
						straight	Order-No.	€	straight	Order-No.	€	crimped	Order-No.	€
	140	23	280	3	10	0,35 straight	0008-462 133	RRP	0,30 straight	0008-451 333	RRP	0,20 crimped	0008-447 573	RRP
	140	23	280	4	10	0,35 straight	0008-462 134	RRP	0,30 straight	0008-451 334	RRP	0,20 crimped	0008-447 574	RRP



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Hand brushes

Hand Scratch Brushes

plastic handle



SPECIAL

Hand scratch brushes with an ergonomic anti-slip handle. Washable.

USAGE



descaling/paint stripping	<input checked="" type="checkbox"/>	wire crimped/smooth
weld seams	<input type="checkbox"/>	flat wire
etching	<input type="checkbox"/>	scratch strip
brushing/dust removal	<input type="checkbox"/>	Nylon/PVC
painting	<input type="checkbox"/>	natural bristle
light cleaning work	<input checked="" type="checkbox"/>	phosphorbronze

TRIM AND MATERIAL

Products available with:	Steel wire	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
Steel wire	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Stainless steel	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Brass wire	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

mm						0,35 straight	RRP	0,30 straight	RRP	0,20 crimped	RRP
A	T	L	Rows	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
110	23	270	3	5	0001-432 603	0001-432 613	0001-432 623				
110	23	270	4	5	0001-432 604	0001-432 614	0001-432 624				

Hand Scratch Brushes

plastic handle



SPECIAL

With anti-slip handle. Ideal shape to clean brake arches.

USAGE



descaling/paint stripping	<input checked="" type="checkbox"/>	wire crimped/smooth
weld seams	<input type="checkbox"/>	flat wire
etching	<input type="checkbox"/>	scratch strip
brushing/dust removal	<input type="checkbox"/>	Nylon/PVC
painting	<input type="checkbox"/>	natural bristle
light cleaning work	<input checked="" type="checkbox"/>	phosphorbronze

TRIM AND MATERIAL

Products available with:	Steel wire	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
Steel wire	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Brass wire	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

mm						0,35 straight	RRP	0,30 crimped	RRP	0,30 crimped	RRP
A	T	L	Rows	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
95	23	245	2	10	3301-462 122	3301-462 162	3301-462 562				

Hand brushes

Hand Scratch Brushes

wooden handle

SPECIAL

Standardtype with quality hardwood body and pin hole.



USAGE

	wire crimped/smooth brass flat wire scratch strip Nylon/PVC natural bristle phosphorbronze
descaling/paint stripping	<input checked="" type="checkbox"/>
weld seams	<input checked="" type="checkbox"/>
etching	<input checked="" type="checkbox"/>
brushing/dust removal	<input checked="" type="checkbox"/>
painting	<input checked="" type="checkbox"/>
light cleaning work	<input checked="" type="checkbox"/>

TRIM AND MATERIAL

Products available with:

Steel wire		Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
Stainless steel								
Brass wire								

A	T	L	Rows	pcs.	0,30 straight brass-coated		RRP	0,35 straight steel wire		RRP
					Order-No.	€		Order-No.	€	
145	25	295	2	12	0001-152 022			0001-152 132		
145	25	295	3	12	0001-152 023			0001-152 133		
145	25	295	4	12	0001-152 024			0001-152 134		
145	25	295	5	12	0001-152 025			0001-152 135		
145	25	295	2	100				0001-151 132		
145	25	295	3	100				0001-151 133		
145	25	295	4	100				0001-151 134		
145	25	295	5	100				0001-151 135		

A	T	L	Rows	pcs.	0,30 straight		RRP	0,30 crimped		RRP	0,30 VA4 straight		RRP
					Order-No.	€		Order-No.	€		Order-No.	€	
145	25	295	2	12	0001-151 332			0001-151 392			0001-152 332		
145	25	295	3	12	0001-151 333			0001-151 393			0001-152 333		
145	25	295	4	12	0001-151 334			0001-151 394			0001-152 334		
145	25	295	5	12	0001-151 335			0001-151 395			0001-152 335		


A	T	L	Rows	pcs.	0,30 straight		RRP	0,30 crimped		RRP
					Order-No.	€		Order-No.	€	
145	25	295	2	12	0001-158 522			0001-150 592		
145	25	295	3	12	0001-158 523			0001-150 593		
145	25	295	4	12	0001-158 524			0001-150 594		
145	25	295	5	12	0001-158 525			0001-150 595		

Hand Scratch Brushes

wooden handle

SPECIAL

Standardtype with quality hardwood body and pin hole. Sturdy professional version.

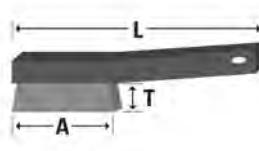

USAGE

	wire crimped/smooth brass flat wire scratch strip Nylon/PVC natural bristle phosphorbronze
descaling/paint stripping	<input checked="" type="checkbox"/>
weld seams	<input checked="" type="checkbox"/>
etching	<input checked="" type="checkbox"/>
brushing/dust removal	<input checked="" type="checkbox"/>
painting	<input checked="" type="checkbox"/>
light cleaning work	<input checked="" type="checkbox"/>

TRIM AND MATERIAL

Products available with:

Steel wire		Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
Stainless steel								
Brass wire								

A	T	L	Rows	pcs.	0,35 straight		RRP	0,30 straight		RRP	0,30 straight		RRP
					Order-No.	€		Order-No.	€		Order-No.	€	
160	30	310	3	12	0901-151 093			0901-152 333			0901-151 593		
160	30	310	4	12	0901-151 094			0901-152 334			0901-151 594		
160	30	310	5	12	0901-151 095			0901-152 335			0901-151 595		



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Hand brushes

Hand Scratch Brushes

wooden handle



USAGE



descaling/paint stripping	<input checked="" type="checkbox"/>	wire crimped/smooth
weld seams	<input type="checkbox"/>	brass
etching	<input type="checkbox"/>	flat wire
brushing/dust removal	<input checked="" type="checkbox"/>	scratch strip
painting	<input type="checkbox"/>	Nylon/PVC
light cleaning work	<input checked="" type="checkbox"/>	natural bristle
		phosphorbronze

TRIM AND MATERIAL

Products available with:	Steel wire	Steel
	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Stainless steel	Cast steel
	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Non-ferrous metal	Stainless steel
	<input type="checkbox"/>	<input type="checkbox"/>
	Aluminium	Non-ferrous metal
	<input type="checkbox"/>	<input type="checkbox"/>
	Soft wood	Aluminium
	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Hard wood	Soft wood

SPECIAL

Perfect brush shape for hollow welds.

mm

A	T	L	Rows	pcs.	Order-No.	RRP	0,35 straight	RRP	0,35 straight	RRP
145	35	295	3	12	0003-162 133	€	0,35 straight	RRP	0,35 straight	RRP

Fine Scratch Brush

wooden handle



USAGE



descaling/paint stripping	<input checked="" type="checkbox"/>	wire crimped/smooth
weld seams	<input checked="" type="checkbox"/>	brass
etching	<input checked="" type="checkbox"/>	flat wire
brushing/dust removal	<input type="checkbox"/>	scratch strip
painting	<input type="checkbox"/>	Nylon/PVC
light cleaning work	<input checked="" type="checkbox"/>	natural bristle
		phosphorbronze

TRIM AND MATERIAL

Products available with:	Brass wire	Steel
	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Natural bristle	Cast steel
	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Non-ferrous metal	Stainless steel
	<input type="checkbox"/>	<input type="checkbox"/>
	Aluminium	Non-ferrous metal
	<input type="checkbox"/>	<input type="checkbox"/>
	Soft wood	Aluminium
	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Hard wood	Soft wood

SPECIAL

Fine scratch brushes for soft and delicate cleaning work.

mm

A	T	L	Rows	B	pcs.	Order-No.	RRP	0,20 crimped	RRP	horsehair	RRP
105	18	220	4	22	12	0003-165 584	€	0,20 crimped	RRP	horsehair	RRP

Hand brushes


HAND BRUSHES

Spark Plug Brushes

wooden handle



SPECIAL

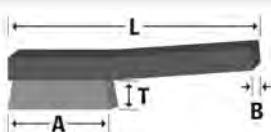

USAGE

descaling/paint stripping	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
weld seams	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
etching	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
brushing/dust removal	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
painting	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
light cleaning work	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

TRIM AND MATERIAL

Products available with:

Brass wire

Steel	<input type="checkbox"/>	Cast steel	<input type="checkbox"/>	Stainless steel	<input type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>	Aluminium	<input type="checkbox"/>	Soft wood	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>	Soft wood	<input type="checkbox"/>	Hard wood	<input type="checkbox"/>

Spark Plug Brushes

plastic handle



SPECIAL



USAGE

descaling/paint stripping	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
weld seams	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
etching	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
brushing/dust removal	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
painting	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
light cleaning work	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

TRIM AND MATERIAL

Products available with:

Brass wire

Steel	<input type="checkbox"/>	Cast steel	<input type="checkbox"/>	Stainless steel	<input type="checkbox"/>
Non-ferrous metal	<input type="checkbox"/>	Aluminium	<input type="checkbox"/>	Soft wood	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>	Soft wood	<input type="checkbox"/>	Hard wood	<input type="checkbox"/>




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de


Hand brushes



To clean batteries (pole and clamp cleaning).

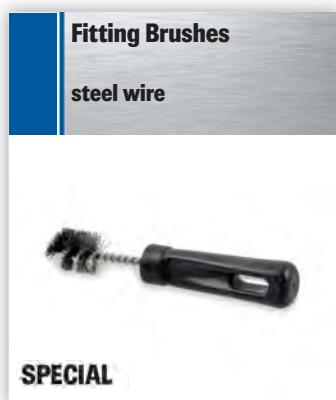


To clean the inside of tubes and solder fittings made of copper or red brass.




Ø	T	L	pcs.		steel wire crimped	RRP		
						Order-No.	€	Order-No.
15 / 25	65	120	12		0008-493 100			

Ø	A	L	pcs.		0,20 steel wire	RRP		
						Order-No.	€	Order-No.
13	25	160	12		0003-075 252			
16	25	160	12		0003-075 253			
19	28	160	12		0003-075 254			
23	25	160	12		0003-075 255			

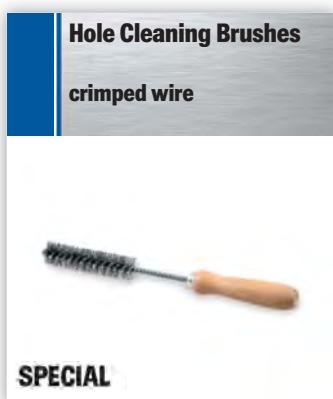

SPECIAL

To clean the inside of steel, wood or plastic products. To remove chippings and loose particles.



mm					0,20	RRP			
Ø	A	L	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
15	100	280	10	0002-892 215					
20	100	280	10	0002-892 220					
25	100	280	10	0002-892 225					



SPECIAL

File Brushes
wooden handle

USAGE



- descaling/paint stripping
- weld seams
- etching
- brushing/dust removal
- painting
- light cleaning work

wire crimped/smooth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
brass	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
flat wire	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
scratch strip	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Nylon/PVC	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
natural bristle	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
phosphorbronze	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


TRIM AND MATERIAL

Products available with:

Steel wire	<input checked="" type="checkbox"/>	Steel
	<input type="checkbox"/>	Cast steel
	<input type="checkbox"/>	Stainless steel
	<input type="checkbox"/>	Non-ferrous metal
	<input type="checkbox"/>	Aluminum
	<input type="checkbox"/>	Soft wood
	<input type="checkbox"/>	Hard wood

mm					straight	RRP			
B	L	A	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
28	240	100	12	0003-140 101					
40	250	110	12	0003-140 102					
12	260	105	12	3303-140 101 *					

* without pin hole

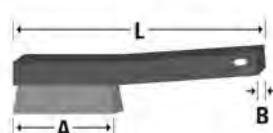

Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Hand brushes

Butchersbrushes

wooden body



SPECIAL

USAGE



descaling/paint stripping	wire crimped/smooth
weld seams	brass
etching	flat wire
brushing/dust removal	scratch strip
painting	Nylon/PVC
light cleaning work	natural bristle
	phosphorbronze

TRIM AND MATERIAL

Products available with:	Steel wire →	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
Steel wire	<input checked="" type="checkbox"/>	<input type="checkbox"/>					

A	T	L	B	Rows	pcs.	0,35 straight Order-No.	RRP	0,35 straight Order-No.	RRP
190	40	205	60	5	10	0281-307 095 *	€	7601-306 095	€

Butchersbrushes

wooden body



SPECIAL

USAGE



descaling/paint stripping	wire crimped/smooth
weld seams	brass
etching	flat wire
brushing/dust removal	scratch strip
painting	Nylon/PVC
light cleaning work	natural bristle
	phosphorbronze

TRIM AND MATERIAL

Products available with:	Steel wire →	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
Steel wire	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Stainless steel	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

A	T	L	Rows	pcs.	0,35 straight Order-No.	RRP	0,30 straight brass-coated Order-No.	RRP	flat wire 1,2x0,25 Order-No.	RRP
150	35	190	5	10	0001-179 097	€	0001-179 297	€	0023-179 197	€
170	35	210	5	10						


Weed Brushes

wooden handle



SPECIAL

Brush with v-shaped wire-configuration.
Removal of moss and weeds on pavements
and cobbled zones. With and without bore
for handle.

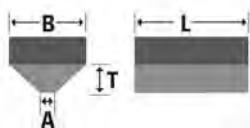

mm								0,35		RRP	0,35		RRP
A	T	L	B	Rows	pcs.	Order-No.		€	Order-No.		€	Order-No.	
4	38	100	35	3	25	0001-261173 *			0011-261173				

* with bore 24 mm.

Brooms

wooden body




SPECIAL

mm								0,75 x 0,25 flat wire		RRP	1,20 x 0,25 flat wire		RRP	0,50 steel wire		RRP
T	L	B	Rows	pcs.	Order-No.	€		Order-No.	€		Order-No.	€		Order-No.	€	
75	300	60	5	10												
75	300	60	6	10	0001-102 006			0001-102 016			0001-102 095					




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Hand brushes

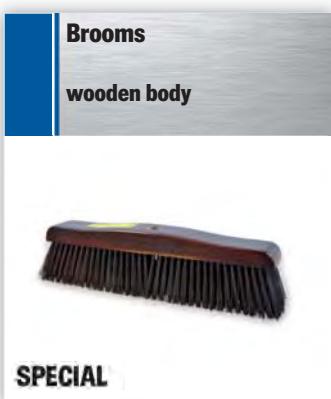

Type with Korfil-D to clean very dirty workshop floors.



mm						Korfil-D	RRP				
T	L	B	Rows	pcs.			Order-No.	€	Order-No.	€	Order-No.
75	400	60	6	1		0001-104 924 *					
75	700	70	7	1		9711-104 925					

* wooden body coated



For workshop brooms. Order no. 9711-104 925.

				RRP			
pcs.	Order-No.	€		Order-No.	€	Order-No.	€
1	0003-000 001						



With handle holder, diameter 28 mm.



mm						Cocos	RRP			Elaston Red	RRP		
T	L	Rows	B	pcs.			Order-No.	€	Order-No.		Order-No.	€	Order-No.
75	320		66	5						0004-102 925			
80	290	20	55	20		0003-102 950							
80	600	6	55	6		0003-102 990				0003-102 960			

Hand brushes

Scrub Brushes
wooden body



SPECIAL




mm						steel wire straight	RRP
T	L	B	Rows	pcs.			
30	210	60	6	10		0001-122 096	
40	210	60	7	10		0001-120 097	

Dusters
wooden handle



SPECIAL

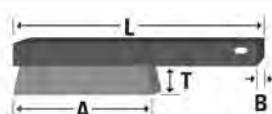

mm								steel wire straight	RRP	Korfil-D	RRP
A	T	L	B	Rows	à	Order-No.					
150	60	310	35	4	10	0001-110 114			0181-110 924		

Broomhandle
wood



mm						wood	RRP	wood pine	RRP
Ø	L		pcs.	Order-No.					
28	1400		5	0003-999 027					
24	1300		5			0003-999 026 *			

* with screw



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Hand brushes




mm				light bristle	RRP				
T	B	Thickness	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
40	20	9	12	0003-086 102					
40	30	9	12	0003-086 103					
40	40	9	12	0003-086 104					
43	50	9	12	0003-086 105					



mm				inch	light bristle	RRP				
T	B	Thickness	inch	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
42	38		1 1/2"	12	1003-086 438					
42	50,8		2"	12	1003-086 450					



Heating element brush.

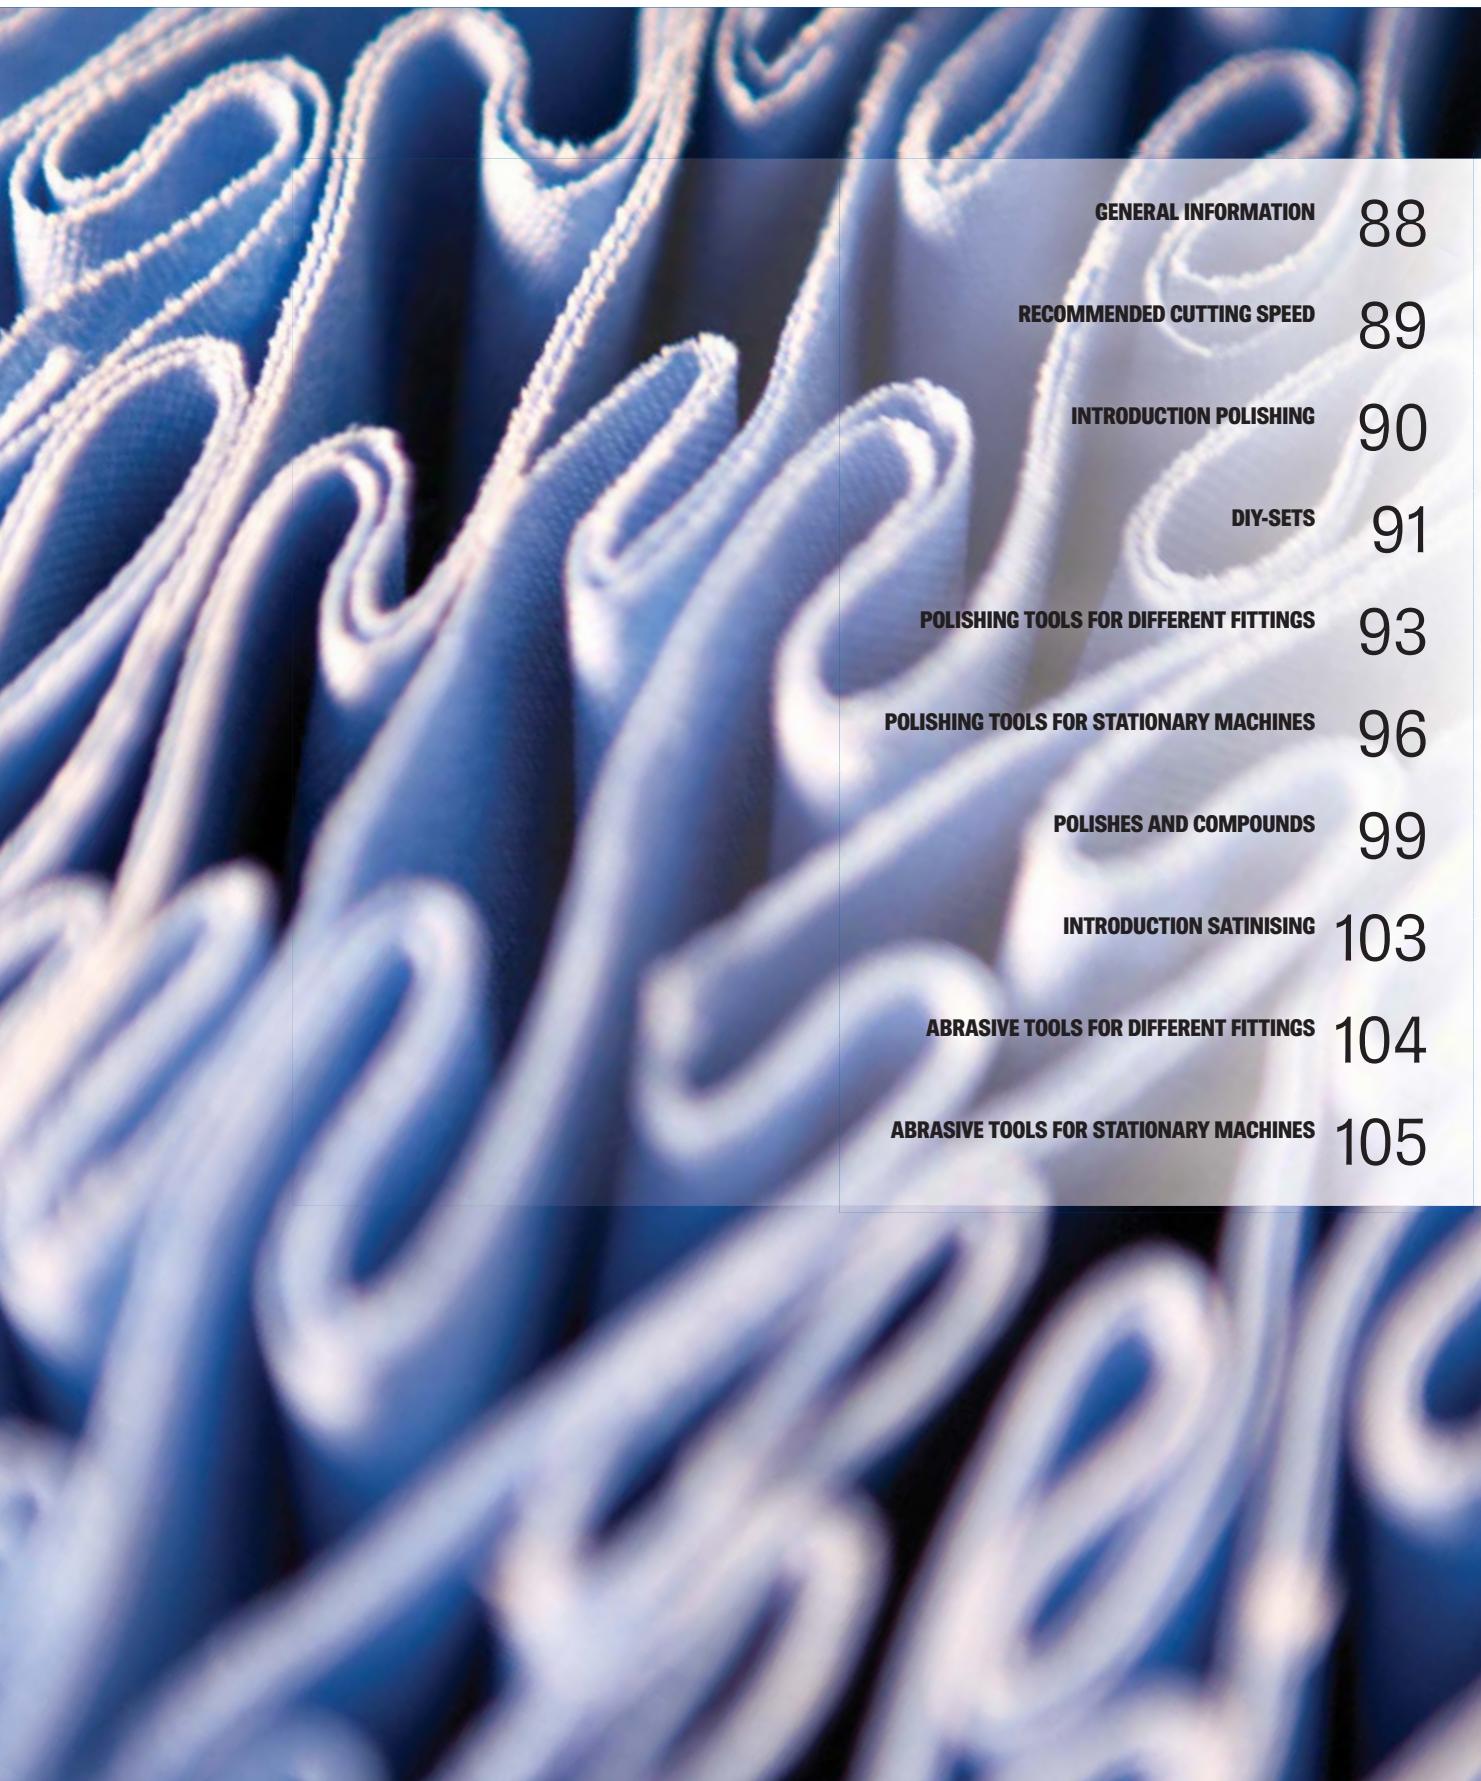

GENERAL INFORMATION	88
RECOMMENDED CUTTING SPEED	89
INTRODUCTION POLISHING	90
DIY-SETS	91
POLISHING TOOLS FOR DIFFERENT FITTINGS	93
POLISHING TOOLS FOR STATIONARY MACHINES	96
POLISHES AND COMPOUNDS	99
INTRODUCTION SATINISING	103
ABRASIVE TOOLS FOR DIFFERENT FITTINGS	104
ABRASIVE TOOLS FOR STATIONARY MACHINES	105

POLISHING /
SATINISING



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Polishing/Satinising

Introduction & technical information

PRODUCT INTRODUCTION POLISHING/SATINISING

Fine surface finishing for every application

Professional surface finishing encompasses a complex and broad spectrum of different mechanical finishing processes in which polishing and satinising play a key role.

As a specialist in surface fine machining, Osborn offers a large selection of high-performance tools for all applications associated with polishing and satinising. We have organised our polishing and satinising products in such a way to suit the type of machine used.

The three key techniques for achieving the perfect surface finish:

There are 3 techniques for producing the desired surface finish.

1. Polishing (power tools)

Polishing is intended to **create perfect high-gloss surfaces** and can be performed using a variety of power tools.

Generally, 3 steps are needed:

- Cutting
- Polishing
- Colouring



We recommend a combination of different quality polishing cloths and polishing compounds. Please note that polishing compound is a must for polishing.

2. Polishes & compounds

Our compounds supplement our range of surface-polishing tools.

The **polishing compounds** can be used for manual or machine polishing and cover the entire range of surface finishing, from grinding and brushing to cutting and colouring.



Steel, stainless steel, non-ferrous metals, wood, paint and many other surfaces can be finished when combined with the appropriate polishing tool.

3. Satinising (power tools)

The starting point is a high-gloss surface. Through satinising, the high-gloss surface will receive a matt look. The finishing result may vary (coarse, medium, fine).

A satinised finish can be created using wet and dry techniques.



Satinising is usually a one-stage process.

No polishing compound is needed for satinising because the abrasive particles are already embedded in the base material of the satinising tool.

CUTTING SPEED

Cutting speed depending on rounds per minute and diameter

Cutting speed

		Ø mm									
		100	150	200	250	300	350	400	450	500	
U/min		300									m/sec
300											m/sec
300											m/sec
400											m/sec
500											m/sec
600							11	12	14	15	m/sec
800					10	12	14	16	18	20	m/sec
1400			14	18	22	25	29	33	36		m/sec
1600		12	16	20	25	29	33	37	41		m/sec
1800		14	18	23	28	33	37	42	47		m/sec
2000		10	15	21	26	31	36	41	47	52	m/sec
2200		12	17	23	28	34	40	46	51	57	m/sec
2400		13	19	25	31	37	44	50	56		m/sec
2600		14	20	27	34	40	47	53			m/sec
2800		15	22	29	36	43	51	58			m/sec
3000		16	23	31	39	47	55	63			m/sec

POLISHING /
SATINISING

Economic cutting speeds (average values):

Usage	Cutting speed
Grinding	ca. 30 m/sec
Satinising	ca. 20 m/sec
Cutting	ca. 25–30 m/sec
Polishing of metal	ca. 30–36 m/sec ±15 %
Polishing of metal (strong contours)	ca. 20 m/sec ±10 %
Polishing of plastic	ca. 15 m/sec ±10 %

The higher the number of revolutions per minute (RPM), the harder and less flexible the trim.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Polishing/Satinising

Introduction polishing

PERFECT POLISHING

Watch the video on YouTube:
www.youtube.com/osbornsolutions



YouTube

Maximum 3 steps for perfect high-gloss surfaces:

1. Cutting follows surface grinding and removes material. For this reason, cutting is not suitable for soft metals. Working with a sisal cloth ring smoothes out unevenness, removes striae and scratches, and prepares rough and uncoated surfaces for polishing.

2. High-quality polishing removes traces of cutting and further smoothes the surface. The best results can be achieved using our specially developed NOTIFLEX® polishing cloth (outstanding results without unattractive bias stitching where reduced amounts of compound are used). Numerous high quality non-fraying cloth polishing buffs with extended service life are available.

3. Colouring calls for minimal pressure and short finishing times. Again various polishing buffs are available.

Which combination for which result?

The following summary will help you find the best combination of polishing compound and polishing tools needed for each step in finishing each material.

► The short version can be found in the info area for each product.

Key to the materials below

1 =	Sisal cloth	6 =	Compound, blue
2 =	Notiflex (NTF) 914	7 =	Felt 2-stage
3 =	Notiflex (NTF) 925	8 =	Cloth 101
4 =	Compound, white	9 =	Cloth 290
5 =	Compound, brown	10 =	Felt 3-stage


3 STEPS Polishing as a 3-step process

System using top-quality, patented Notiflex mat without bias stitching.

Suitable for all machines, diameters and bores.

1. Cutting

For removing defects and scratches, belt sanding > 280 grit or sisal lines.




	Steel	Stainless steel	Aluminium	Brass	Copper
1 o. 10	1 o. 10	1 o. 10	1 o. 10	5	starting with step 2

4

2. Polishing

Removing traces of cutting and blending the surface. Important for achieving a flat, high-gloss surface in the next step.

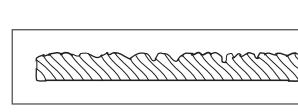


	Steel	Stainless steel	Aluminium	Brass	Copper
2 o. 10	2 o. 10	2 o. 10	2 o. 10	5	2 o. 10

4

3. Colouring

For high-gloss surfaces.

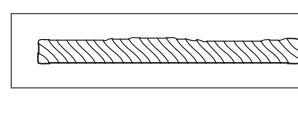

	Steel	Stainless steel	Aluminium	Brass	Copper
3 o. 10	3 o. 10	3 o. 10	3 o. 10	6	3 o. 10


6

2 STEPS Polishing as a 2-step process

Suitable for applications where no cutting is needed. Please note: there is a special summary of polishing buffs and compounds for the 2-step method using a satiniser.

1. Polishing

Level the surface. Important for achieving a flat, high-gloss surface in the next step.

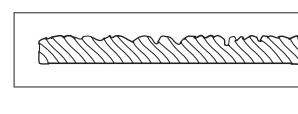


	Steel	Stainless steel	Aluminium	Brass	Copper
7	7	7	7	7	7

4

2. Colouring

For high-gloss surfaces.

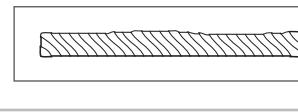


	Steel	Stainless steel	Aluminium	Brass	Copper
8	8	8	8	8	8

6

1 STEP Polishing as a 1-step process

1. Polishing and finishing

For low-gloss effects (not high gloss)



	Steel	Stainless steel	Aluminium	Brass	Copper
9	9	9	9	9	9

4

Polishing/Satinising DIY-Sets



The 6-piece kit contains everything you need for the 2-stage polishing process: polishing mop, felt, drive arbor, compound for polishing and colouring.



USAGE

2. Polishing
3. Colouring
- | | |
|-------------------|---|
| Felt, 2-stage, 7 | 7 |
| Felt, 3-stage, 10 | 7 |
| Cloth 280, 9 | 4 |
| Cloth 101, 8 | 4 |
| Sisal cloth, 1 | 1 |
| NTF914 | 1 |
| NTF925 | 3 |

mm	B	rpm	pcs.	Polishing kit 2-stage	RRP
Ø				Order-No.	€
85/80	10	4000	5	1203600000	

TRIM AND MATERIAL

Product available with

	Polishing	Steel	Stainless steel	Aluminium	Brass	Copper
Polishing	7	7	7	7	7	7
Colouring	4	4	4	6	6	6



Contents	pcs.
felt, 2-stage	1
101 buffs	1
compound: white, brown, blue	1
tampered shank	1



The 10-piece kit contains everything you need for the 3-stage polishing process: Polishing buffs, drive arbor, compound for cutting, polishing and colouring.



USAGE

1. Cutting
2. Polishing
3. Colouring
- | | |
|-------------------|---|
| Felt, 2-stage, 7 | 7 |
| Felt, 3-stage, 10 | 7 |
| Cloth 280, 9 | 4 |
| Cloth 101, 8 | 4 |
| Sisal cloth, 1 | 1 |
| NTF914 | 2 |
| NTF925 | 2 |

mm	B	rpm	pcs.	Polishing kit 3-stage	RRP
Ø				Order-No.	€
100	10	4000	6	8603600010	

TRIM AND MATERIAL

Product available with

	Cutting	Steel	Stainless steel	Aluminium	Brass	Copper
Cutting	1	1	1	1	1	starting with step polishing
Polishing	2	2	2	2	2	2
Colouring	4	4	4	5	5	5



Contents	pcs.
sisal cloth	2
NTF914	2
NTF925	2
compound: white, brown, blue	1
tampered shank	1



The 4-part kit contains three satinising buffs (coarse, medium, fine) and a drive arbor.



USAGE

- | | |
|-----------------|-----------|
| Satinising | coarse |
| Deoxidising | medium |
| Light grinding | fine |
| Light deburring | superfine |
| Blending | |
| Fine grinding | |

mm	B	rpm	pcs.	Satinising Kit	RRP
Ø				Order-No.	€
100	10	4000	6	8603600004	

TRIM AND MATERIAL

Product available with

coarse	Steel	Stainless steel
medium	Aluminium	Brass
fine	Copper	



Contents	pcs.
coarse non woven	1
medium non woven	1
fine non woven	1
tampered shank	1



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Polishing/Satinising DIY-Sets



	Acrylic Polishing Kit	RRP
à	Order-No.	€
10	1203600001	



The 4-part kit contains Dur Plast polish,
sandpaper, sponge and polishing cloth.



SANDING.



APPLYING.



RUBBING.



POLISHING.



	Metal Polishing Kit	RRP
à	Order-No.	€
10	1203600002	



The 3-part kit contains Metal polish polish,
sponge and polishing cloth.

Polishing/Satinising

Polishing tools for different fittings




Polishing Buffs

cloth or fleece

Material is fixed in a toothed metal ring. The polishing buff is clamped using conical spring washers.

USAGE							TRIM AND MATERIAL						
							Product available with						
							Cutting	Steel	Stainless steel	Aluminium	Brass	Copper	
mm	mm	mm	rpm	max	pc.	RRP	1 sisal cloth	2 NTF914	RRP	3 NTF925	RRP		
Ø	A	B			Order-No.	€	Order-No.	€	Order-No.	€			
100	17	10	4000	10	8203100944								starting with step polishing
100	15	10	4000	5*			8203100914						
100	10	10	4000	5*									
150	17	14	3000	10	8203150944								
150	15	14	3000	5*				8203150914					
150	10	14	3000	5*						8203150925			
200	17	14	3000	10	8211201944								
200	15	14	3000	5*				8203200914					
200	10	14	3000	5*						8203200925			

* Here, 5 pcs. correspond to 10 buffs, because our Notiflex buffs are supplied in 2-buff sets.

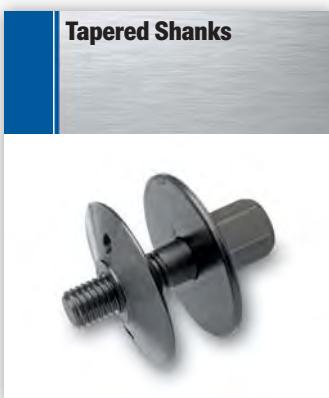


Tapered Shanks



mm		mm		RRP
A	G	pc.	Order-No.	€
15-30	M14	8	1203300003	
15-50	M14	8	1213300003	

Conical shaft for angle polisher for tensioning polishing and satinising buffs with bores from 14 mm to 150 mm dia.

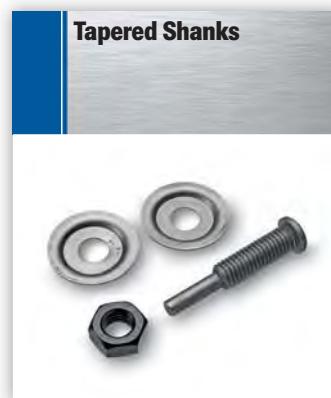

Tapered Shanks



mm		mm		RRP
A	S	pc.	Order-No.	€
10-35	6	4	8103800224	

Tapered shank for power drill or flexible shaft for clamping polishing and satinising buffs with bores from 10 mm to 100 dia.



Polishing Buffs

cloth or fleece

Material is fixed in a toothed metal ring. The polishing buff is clamped using conical spring washers.

USAGE							TRIM AND MATERIAL						
							Product available with						
							Cutting	Steel	Stainless steel	Aluminium	Brass	Copper	
mm	mm	mm	rpm	max	pc.	RRP	1 sisal cloth	2 NTF914	RRP	3 NTF925	RRP		
Ø	A	B			Order-No.	€	Order-No.	€	Order-No.	€			
100	17	19/6	4000	10	2103100944								starting with step polishing
100	15	19/6	4000	5*				2103100914					
100	10	19/6	4000	5*						2103100925			

* Here, 5 pcs. correspond to 10 buffs, because our Notiflex buffs are supplied in 2-buff sets.




Items available immediately from stock are printed in bold type.

Please contact us for other sizes/materials: service@osborn.de

Polishing/Satinising

Polishing tools for different fittings

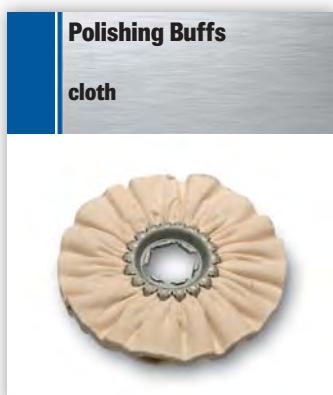

The polishing buff is clamped using conical spring washers.

USAGE

	Felt, 2-stage, 7 Felt, 3-stage, 10 Cloth 290, 9 Cloth 101, 8 Sisal cloth, 1 NTF914, 2 NTF925, 3
1. Cutting 2. Polishing 3. Colouring	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

TRIM AND MATERIAL

Product available with	Steel	Stainless steel	Aluminium	Brass	Copper
Polishing		9 4	9 4	9 4	9 4
Colouring		8 6	8 6	8 6	8 6

Technical Data

mm	mm	mm	mm	mm	mm	mm	Order-No.	RRP	Order-No.	RRP
Ø	A	B	C	rpm	pc.	mm		€		€
100	17	19/6	4000	10	1903100290	9	cloth 290		8	cloth 101
							Order-No.		Order-No.	



USAGE

	Felt, 2-stage, 7 Felt, 3-stage, 10 Cloth 290, 9 Cloth 101, 8 Sisal cloth, 1 NTF914, 2 NTF925, 3
1. Cutting 2. Polishing 3. Colouring	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

TRIM AND MATERIAL

Product available with	Steel	Stainless steel	Aluminium	Brass	Copper
Polishing		7 4	7 4	7 5	7 5
Colouring		8 6	8 6	8 6	8 6

Technical Data

mm	mm	mm	mm	mm	mm	mm	Order-No.	RRP	Order-No.	RRP	
Ø	A	B	S	rpm	pc.	mm		€		€	
85	15	10		4000	10	1503015085	7	fleece 2 stufig		8	cloth 101
80	10	10		4000	10					Order-No.	
80	10		6	4000	12						
100	10	10		4000	10						



Material is fixed in a toothed metal ring.

USAGE

	Felt, 2-stage, 7 Felt, 3-stage, 10 Cloth 290, 9 Cloth 101, 8 Sisal cloth, 1 NTF914, 2 NTF925, 3
1. Cutting 2. Polishing 3. Colouring	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

TRIM AND MATERIAL

Product available with	Steel	Stainless steel	Aluminium	Brass	Copper
Polishing and finish		9 6	9 6	9 6	9 6

Technical Data

mm	mm	mm	mm	mm	mm	mm	Order-No.	RRP	Order-No.	RRP	
Ø	A	B	S	rpm	pc.	mm		€		€	
80	10	10		4000	10	2103080290	9	-polishing cloth 290		9	polishing cloth 290
80	10		6	4000	12	1903080290					
100	10	10		4000	10	2103100290					

Polishing/Satinising

Polishing tools for different fittings



For Cutting, removing defects and scratches.
Developed for usage on cordless power tools:
Low weight, precise working without vibrations. Due to the weight reduction the battery life can be prolonged between 20–25%.
You can work longer and reduce the charging cycles of your power tool.

USAGE	
1. Cutting	<input type="checkbox"/>
2. Polishing	<input checked="" type="checkbox"/>
3. Colouring	<input type="checkbox"/>
Felt, 2-stage, 7	<input type="checkbox"/>
Felt, 3-stage, 10	<input type="checkbox"/>
Cloth 280, 9	<input type="checkbox"/>
Cloth 101, 8	<input type="checkbox"/>
Sisal cloth, 1	<input type="checkbox"/>
NTF914 2	<input type="checkbox"/>
NTF925 3	<input type="checkbox"/>

mm	G	rpm	pcs.	1 sisal cloth	RRP
100	M14	9000	7	L940030842	

TRIM AND MATERIAL

Product available with

Cutting		1	Steel
		4	Stainless steel

Aluminium
Brass
Copper
starting with step polishing



For Colouring (high-gloss surface).
Developed for usage on cordless power tools: Low weight, precise working without vibrations. Due to the weight reduction the battery life can be prolonged between 20–25%. You can work longer and reduce the charging cycles of your power tool.

USAGE	
1. Cutting	<input type="checkbox"/>
2. Polishing	<input checked="" type="checkbox"/>
3. Colouring	<input type="checkbox"/>
Felt, 2-stage, 7	<input type="checkbox"/>
Felt, 3-stage, 10	<input type="checkbox"/>
Cloth 280, 9	<input type="checkbox"/>
Cloth 101, 8	<input type="checkbox"/>
Sisal cloth, 1	<input type="checkbox"/>
NTF914 2	<input type="checkbox"/>
NTF925 3	<input type="checkbox"/>

mm	G	rpm	pcs.	3 NTF925	RRP
100	M14	9.000	7	L911000436	

TRIM AND MATERIAL

Product available with

Colouring		1	Steel
		3	Stainless steel

Aluminium
Brass
Copper



More information and further accessories for cordless power tools see pages 36–38 and 104.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Polishing/Satinising

Polishing tools for stationary machines



Wave Buffs

sisal and cloth

Wave Buffs are corrugated waves of cotton cloth or sisal-cloth fixed around a metal clinch ring. This uniform construction ensures a long service life, high polishing action and a cool air effect.

Applications: in combination with Osborn compounds, flat parts, pots & pans can be polished and finished, this product is also suitable for removing dust after sanding wood. The construction prevents the working surface from becoming too hot, ideal conditions for a perfect finish. Wave buffs are the chosen product when machine oscillation is not available.

Cutting sisal/cloth

mm	Ø	Layers	B	Treatment	pcs.	sisal/cloth	RRP
Ø						€	
300	3	80			5	L043310093	
350	3	130		H2	5	L043310047	
350	3	130		H5A	5	L043310025	
360	3	130			5	L043310189	

Cutting cotton

mm	Ø	Layers	B	Treatment	pcs.	medium	RRP	medium hard	RRP
Ø						€	Order-No.	€	
300	16	80			5	L013300214			
350	16	130			5			L013300348	

Cloth Type	Properties
TT	hard orange
DF590	stiff green
308	medium hard
290	medium
215	medium soft
101A	soft
M05	molton



Airflow Buffs

cloth

These general purpose buffs are manufactured with irregular folds clasped in a metal clinch ring. This is our standard, most cost effective buff for nearly all polishing and finishing applications. Buffs can be mounted together on a shaft to achieve any required width. Some trim materials can be treated for a stiffer buff and extended service life.

Cutting

mm	Ø	Layers	B	Treatment	pcs.	sisal/cloth	RRP	medium hard	UVP	hard orange	RRP
Ø						Order-No.	€	Order-No.	€	Order-No.	€
400	16	130			5	L000000962					
400	16	130		HSE	5	L043090792					
400	16	130			5			L013030989		L013033828	

Polishing

mm	Ø	Layers	B	Treatment	pcs.	medium	RRP
Ø						€	
400	16	130			5	L013030179	

Cloth Type	Properties
TT	hard orange
DF590	stiff green
308	medium hard
290	medium
215	medium soft
101A	soft
M05	molton

Colouring

mm	Ø	Layers	B	Treatment	pcs.	molton	RRP	soft	RRP
Ø						Order-No.	€	Order-No.	€
400	16	130			5	L013030901			

Polishing/Satinising

Polishing tools for stationary machines



Cloth is folded with regular pleats, arranged and fixed around a cardboard core. Pleated Buffs are used for polishing and finishing particularly complex parts. These buffs combine a cool air effect with great resilience. To process a wider part, several buffs can be ganged together. The uniform folds guarantee excellent results, with high compound retention and a long service life. Different trim quality is available depending on whether the process is polishing or colouring.

Cutting

mm	Ø	Layers	B	Treatment	pcs.	medium hard	RRP	stiff green	RRP	hard orange	RRP
	Ø	Layers	B	Treatment	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
300	16	80			5	L113010745		L113010744		L113010743	
350	16	130			5	L012022230		L012021731		L113010746	

Polishing

mm	Ø	Layers	B	Treatment	pcs.	medium soft	RRP	medium	RRP
	Ø	Layers	B	Treatment	pcs.	Order-No.	€	Order-No.	€
300	16	80			5	L013010167		L012022605	
350	16	130			5	L012021660		L012022573	

Colouring

mm	Ø	Layers	B	Treatment	pcs.	Molton	RRP
	Ø	Layers	B	Treatment	pcs.	Order-No.	€
300	16	80			5	L012021292	
350	16	130			5	L012022404	

Cloth Type	Properties
TT	hard orange
DF590	stiff green
308	medium hard
290	medium
215	medium soft
101A	soft
M05	molton



Open structured biased sisal web is clasped in a metal clinch ring. Close stitching results in a very hard buff creating minimum dust when in operation. Sisal airflow buffs are the most cost effective solution for all cutting operations whether processing: pan lids, stainless steel, aluminum or non-ferrous metal surfaces, builder's hardware, car parts or household appliances.

mm	Ø	Layers	B	Treatment	pcs.	SiFN	RRP
	Ø	Layers	B	Treatment	pcs.	Order-No.	€
350		10	130		5	L023060786	



Polishing/Satinising

Polishing tools for stationary machines



mm	Ø	Layers	B	Treatment	pcs.	48	RRP
300	4	80		H5A	5	L033440041	
300	4	80			5	L033440201	
400	4	130		V66	5	L033440645	
400	4	130			5	L000020899	



Sisal cord strands are arranged and held by the metal clinch ring. This is an extremely flexible product, remaining cool in operation and ideal for the cutting operation on highly contoured parts. Service life and stiffness can be extended by adding special treatments.



mm	Ø	Reduced to	pcs.	K80 A2T	RRP
80	20		2	L800000126	
80	22		2	L000044060	
80	25		2	L800000008	
80	35		2	L800000046	
80	45		2	L800000048	
80	50		2	L800000084	
80	2" (50,8)		2	L800000119	
130	22		2	4403022130	
130	30		2	L800000066	
130	35		2	L000002066	
130	60		2	L800000029	
130	80		2	L800000055	

Airflows, pleated buffs and wave buffs are most economically manufactured on a metal clinch ring. The inside diameter of the clinch ring may fit precisely on the machine shaft, more commonly the inside diameter can be reduced to the correct bore size with reusable metal centre-plates.

Polishing/Satinising Polishes and compounds



Important note:

No polishing compound is needed for satinising because the abrasive particles are already embedded in the base material of the satinising tool.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Polishing/Satinising Polishes and compounds



Important user information

Polishes and compounds – the key to a perfect polishing result



What to look for when selecting the right polish:

1. General user information

Our polishes are intended for the professional finishing of all lacquer types. Different compounds are available for different finishing steps. Details are given in the figures below.

2. Polish types and applications

Strong Cut	High-efficiency abrasive compound for scratches and damage that can still be repaired. For the second step, we recommend Nano-Polish.
Cut	Fine abrasive compound for all wear/weathering marks in older paints. For a deep gloss, we recommend using Nano-Polish in the second step.
Complete	Fine abrasive compound to remove all wear/weathering marks in all kinds of paint. For dark paint, we recommend using Finish in the second step.
Complete Plus	Especially for small scratches and for reviving surfaces. For dark lacquer we recommend Finish as second step.
Finish	Ideal for the hologram-free removal of tiny scratches and films on conventional and fresh paints. Brings a deep and brilliant gloss to dark lacquer.
Nano-Polish	Especially suitable for the new generation of scratch-resistant lacquer. For removing tiny scratches, holograms and films to give a deep and brilliant gloss.




3. Detailed information

Rotational speed						
rotating (n=rpm)	1500–2000	1500–2000	1500–2000	1500–2000	1500–2000	1500–2000
eccentric (n=rpm)	2000–10000	2000–10000	2000–10000	2000–10000	2000–10000	2000–10000
Finishing flaws						
Orange peel	✓	✓	✓	✓	✓	✓
Holograms	–	–	–	–	✓	✓
Scratches	✓	✓	✓	✓	✓	✓
Weathering	–	✓	✓	✓	–	–
For OEMs						
Paint runs	–	–	–	✓	✓	✓
Dirt inclusions	–	–	–	✓	✓	✓

Use/Lacquer type

Conventional type	1.500	2.000	2.000–3.000	2.000–3.000	3.000–4.000	2.500–4.000
Scratch resistant paint	–	2.000	2.500	2.500	3.500–4.000	3.000–4.000
Fresh paint	1.500	2.000	2.000–3.000	2.000–3.000	3.000–4.000	2.500–4.000
With Pad*	orange	orange/blue	orange/blue	orange/blue	black	black
Properties	hard	medium	medium	medium	soft	soft
With lambskin*	✓	✓	✓	✓	–	–

Lacquer type

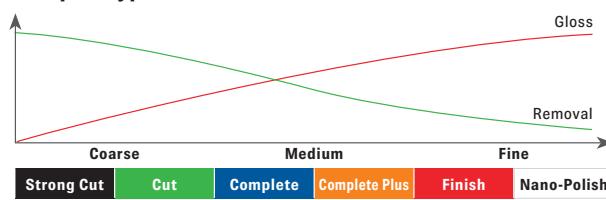

Strong Cut	RRP	Cut	RRP	Complete	RRP	Complete Plus	RRP	Finish	RRP	Nano-Polish	RRP
ml	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€
1000	8	L699940320		L699740250		L699940250		L699940260		L699740340	

* Pads and lambskin can be obtained from good accessory dealers.



Important:
We recommend first trying in an inconspicuous spot.

Polishing/Satinising Polishes and compounds

Polishes liquid

The Unipol Dur Plastic Polish can is blue with a white label. The Unipol Metal Polish can is silver with a blue label.



		Dur Plast	RRP
ml	pcs.	Order-No.	€
50	10	2103002101	
1000	6	L669002101	

For non-grained hard plastics, plexiglass or macrolon, polyester, acrylic. Do not use on coated visors.

		Metal Polish	RRP
ml	pcs.	Order-No.	€
50	10	2103002102	
1000	6	L669002102	

For chrome, aluminum, silver, stainless steel, brass, copper, tin and hard plastic materials.

Polishing Compounds solid

The bars are rectangular and have a slightly textured surface.



USAGE

white (cutting)	Steel
white (polishing)	Stainless steel
brown (cutting)	Aluminium
brown (polishing)	Brass
blue (colouring)	Copper

		4 white	RRP	5 brown	RRP	6 blue	RRP
gr.	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
110	15	2103005333		2103007012		2103000461	

For our comprehensive standard compounds assortment please see next page.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Polishing/Satinising Polishes and compounds

OSBORN CLASSIC® COMPOUND RANGE



Osborn Classic® Compounds are top selling products taken from the former Unipol® and Langsol® ranges. The 14 compounds achieve excellent results whether brushing, polishing, colouring or superfinishing on aluminium, stainless steel, non-ferrous or plastic. They can be used together with all buffs in the Osborn range in a one-step or multi-step process.

Process	Colour	Type	Name	Description	pcs.	Order-No.	€	Apply on			Matrix			
								Aluminium	Stainless	Non-ferrous	Plastics	fat 1=low, 10=high	cut 1=low, 10=high	gloss 1=low, 10=high
Brushing	grey	39.038.1	B1000	Greasy, abrasive general brushing compound for deburring and satin finishing	1	L779840010		X	X	X		8	9	3
Polishing	brown	7012	P1000	Cutting compound for brass, high cut and medium gloss	1	L779007012				X		4	8	4
	brown	2.292	P2000	All-round cutting compound for lead-free brass, zinc; achieves glossy and line-free surface	1	L779132001		X	X			3	7	5
	white	5333	P3000	All-purpose cutting compound for stainless steel, use with sisal buffs	1	L779005333			X			6	8	4
	light green	2043 JF	P4000	All-purpose cutting compound for stainless steel, use with cotton buffs	1	L779930401			X		X	6	7	4
	blue	466	P5000	Cut & colour compound for aluminium, stainless brass and zinc; one-step polishing process	1	L779000466		X		X		4	6	6
	orange	Edelgelb	P6000	Cut & colour compound for aluminium, with high fat content for line-free surface, easy degreasing	1	L779840130		X				4	4	6
	dark pink	433	P7000	Cut & colour compound for aluminium, stainless brass and zinc; higher gloss than P5000	1	L779000433		X	X	X		3	6	7
	white	G65	P8000	All-round polishing compound for lacquers and plastics	1	L779001385					X	3	4	6
Colouring	beige	9216	C1000	Colouring compound for all lacquers and plastics when higher gloss required	1	L779920160					X	2	3	7
	blue	462	C2000	All-round colouring compound, ideal for stainless steel	1	L779000462			X			2	3	8
	light pink	1003A	C3000	All-round colouring compound, ideal for aluminium, zinc and stainless steel	1	L779191001		X	X	X		3	3	8
Super finish	yellow	SA 175	F1000	High end colouring compound achieves a dark shine	1	L779000175			X	X	X	2	2	9
	light orange	Gold easy	F2000	Top colouring compound for a deep line-free gloss	1	L779009510			X	X	X	1	1	10

1 piece = approx. 1.000–1.200 g

PERFECT SATINISING

Hier youtube-Video ansehen.
www.youtube.com/osbornsolutions



YouTube

Satinising is a one-stage system for creating flat surfaces. The main considerations when selecting the satinising buff are what the original high-gloss surface should look like after the satinising process.

There are three possible finish grades when satinising a surface.

Coarse brush stroke



Medium brush stroke



Fine brush stroke



Important note

Non-woven abrasive tools are used without polishing compound because the abrasive particles are already embedded in the base material of the satiniser.

These tools made of matted material containing abrasive particles are characterised by an open and flexible structure. They are self-sharpening and can be used in wet and dry applications.

Because they can also be used with hand-held tools, they are ideal for a wide range of applications, from satinising to deoxydising to superfine grinding.

Our non-woven abrasive tools are available in different grades and sizes, depending on their purpose.



Finding the right tool

Please check your product choice using the information in the info heading. This will tell you the machine for each product and its suitability, as well as providing a summary of the available carrier material grades (grits) suitable for the material being finished.



USAGE

	coarse	medium	fine	superfine
Satinising	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Desoxydising	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Light grinding	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Light deburring	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Blending	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Fine Grinding	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

TRIM AND MATERIAL

Product available with	coarse	medium	fine	superfine	Steel	Stainless steel	Aluminium	Brass	Copper
	<input type="checkbox"/>								
	<input type="checkbox"/>								
	<input type="checkbox"/>								
	<input type="checkbox"/>								





Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Polishing/Satinising


Abrasives tools for different fittings



Material is fixed in a toothed metal ring. The satiniser buff is clamped using conical spring washers.

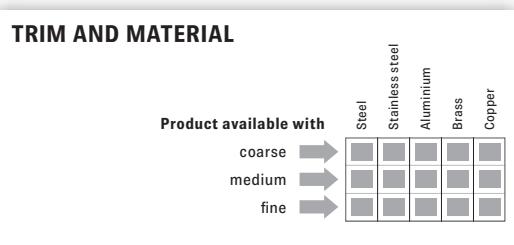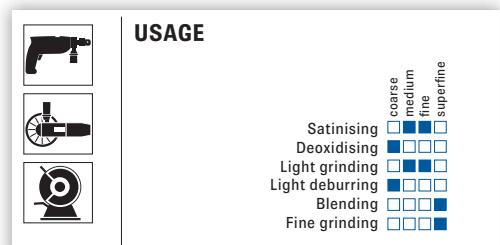


mm	mm	Ø	rpm	pcs.	coarse	RRP	medium	RRP	fine	RRP
Ø	A	B			Order-No.	€	Order-No.	€	Order-No.	€
100	23	10	4000	10	8203100934		8203100936		8203100947	
100	30	10	4000	10						
150	25	14	3000	10	8203150934		8203150936		8203150947	
150	30	14	3000	10						
200	25	14	3000	10	8203200934		8203200936		8203200947	
200	30	14	3000	10						

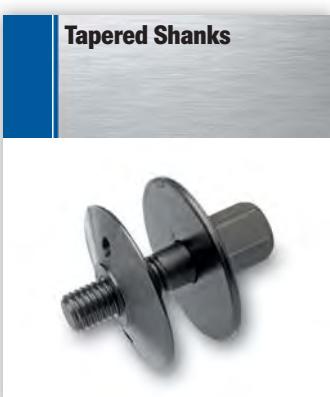

mm	G	pcs.	RRP
A		Order-No.	€
15-30	M14	8	1203300003
15-50	M14	8	1213300003

Conical shaft for angle polisher for tensioning polishing and satinising buffs with bores from 14 mm to 150 mm dia.


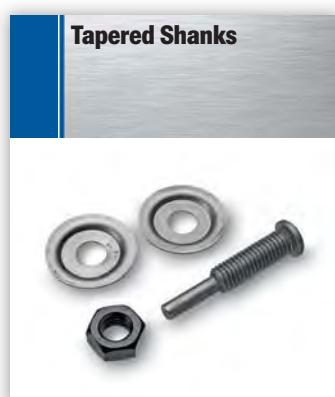


mm	mm	RRP	
A	S	Order-No.	€
10-35	6	8103800224	

Tapered shank for power drill or flexible shaft for clamping polishing and satinising buffs with bores from 10 mm to 100 dia.



For satinising, desoxydising, light grinding/deburring, blending and fine grinding. Surface will be have a fine, matt finish. Can be used in wet and dry processes. Don't use polishing compound. Developed for usage on cordless power tools: Low weight, precise working without vibrations. Due to the weight reduction the battery life can be prolonged between 20–25%. You can work longer and reduce the charging cycles of your power tool.

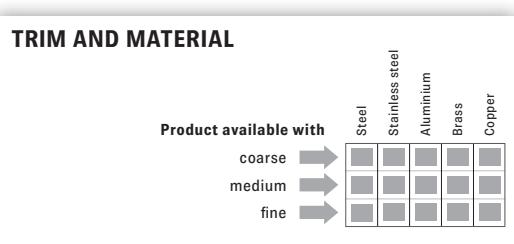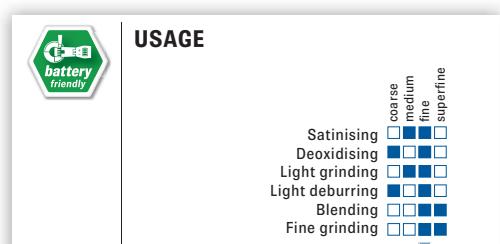

mm	G	rpm	pcs.	fine	RRP
Ø				Order-No.	€
100	M14	9.000	7	L960030577	



More information on cordless powertool accessories see pages 36–38 and 95.

Polishing/Satinising

Abrasive tools for stationary machines

Airflow Buffs

non-woven



mm Ø	Layers	B	Treatment	pcs.	A2 coarse		RRP €	A4 medium		RRP €	A6 fine		RRP €	A7 very fine		RRP €
					Order-No.	Order-No.		Order-No.	Order-No.		Order-No.	Order-No.		Order-No.	Order-No.	
300	4	80		5	L063800285		L063800261		L063800259		L063800288					
350	4	130		5		L063800214		L063800137								



A variety of abrasive non-woven materials can also be used in the form of airflows, with layers of material gathered around a metal clinch ring. Best results are obtained at low RPM with minimum buff pressure, this also ensures long life.

Applications: all satinising operations, on both manual and automatic machines.


Lipprite Wheel



mm Ø	mm L	mm B	rpm	pcs.	K80 A2T		RRP €	K100 A4T		RRP €	K180 A6T		RRP €	K280 A		RRP €
					Order-No.	Order-No.		Order-No.	Order-No.		Order-No.	Order-No.		Order-No.	Order-No.	
150	25	1"	3200	1	L81545202E			L50452008E			L81545231E			L81545247E		
200	50	3"	2400	1	L000014507			L068011347			L000042624			L68013206J		

The abrasive flaps are bonded radially to a phenolic tube. The three dimensional open web ensures a „self-cleaning action“ for easy removal of surface contamination or to obtain a decorative finish.
Ideal for cleaning profiled or irregular parts, suitable to obtain an aesthetic finish.

Lipprox Wheel

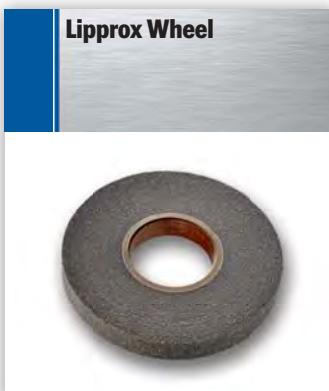

mm Ø	mm L	mm B	rpm	pcs.	aluminium A4T C1H7		RRP €	aluminium A6T C1H7		RRP €	SIC S6T C2H7		RRP €	SIC S7T C2H7		RRP €
					Order-No.	Order-No.		Order-No.	Order-No.		Order-No.	Order-No.		Order-No.	Order-No.	
150	13	1"	3200	1	L15451408A			L15451431A			L15452433A			L15452448A		
150	25	1"	3200	1	L15451408E			L15451431E			L15452433E			L15452448E		
200	13	3"	2400	1	L50901408A			L50901431A			L68014192A			L50902448A		
200	25	3"	2400	1	L50901408E			L50901431E			L68014192E			L50902448E		

The abrasive web is wound around a phenolic tube and treated, this ensures constant hardness and abrasiveness over the life of the product. Lipprox are perfect for light deburring.
Suitable for light deburring and fast achievement technical surface finish. The product is clearly marked with a directional arrow and must rotate in the direction shown.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Polishing/Satinising

Abrasive tools for stationary machines

SLK – Coated Abrasive Flap Wheels abrasive



Top quality coated abrasive flaps, in a selection of grades mounted around a core. Several defined sizes are available. Recommended for grinding formed parts in preparation for polishing.
Applications: grinding steel tubes, grinding pots & pans or iron soles prior to polishing.

mm	Ø		K40	RRP	K60	RRP	K80	RRP	K120	RRP	
Ø	A	B	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€
165	50	54	1	0043160050		0063160050				0123160050	
165	50	54	1					0083160050			

Other dimensions on request.

Rolls non-woven



Rolls of raw abrasive non-woven material in various grades and widths. Applications include general finishing or cleaning of weld seams.

mm	mm		A4 medium	RRP	A6 fine	RRP	A6 very fine	RRP
L	B	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
10000	115	1	L063330245		L063330127		L063330132	




Please note, satin finishing rollers can be found in the chapter machinebrushes on page 70/71.

Centre-Plates



Airflows, pleated buffs and wave buffs are most economically manufactured on a metal clinch ring. The inside diameter of the clinch ring may fit precisely on the machine shaft, more commonly the inside diameter can be reduced to the correct bore size with reusable metal centre-plates.

mm		K80 A2T	RRP	
Ø	Reduced to	pcs.	Order-No.	€
80	20	2	L800000126	
80	22	2	L000044060	
80	25	2	L800000008	
80	35	2	L800000046	
80	45	2	L800000048	
80	50	2	L800000084	
80	2" (50,8)	2	L800000119	
130	22	2	4403022130	
130	30	2	L800000066	
130	35	2	L000002066	
130	60	2	L800000029	
130	80	2	L800000055	

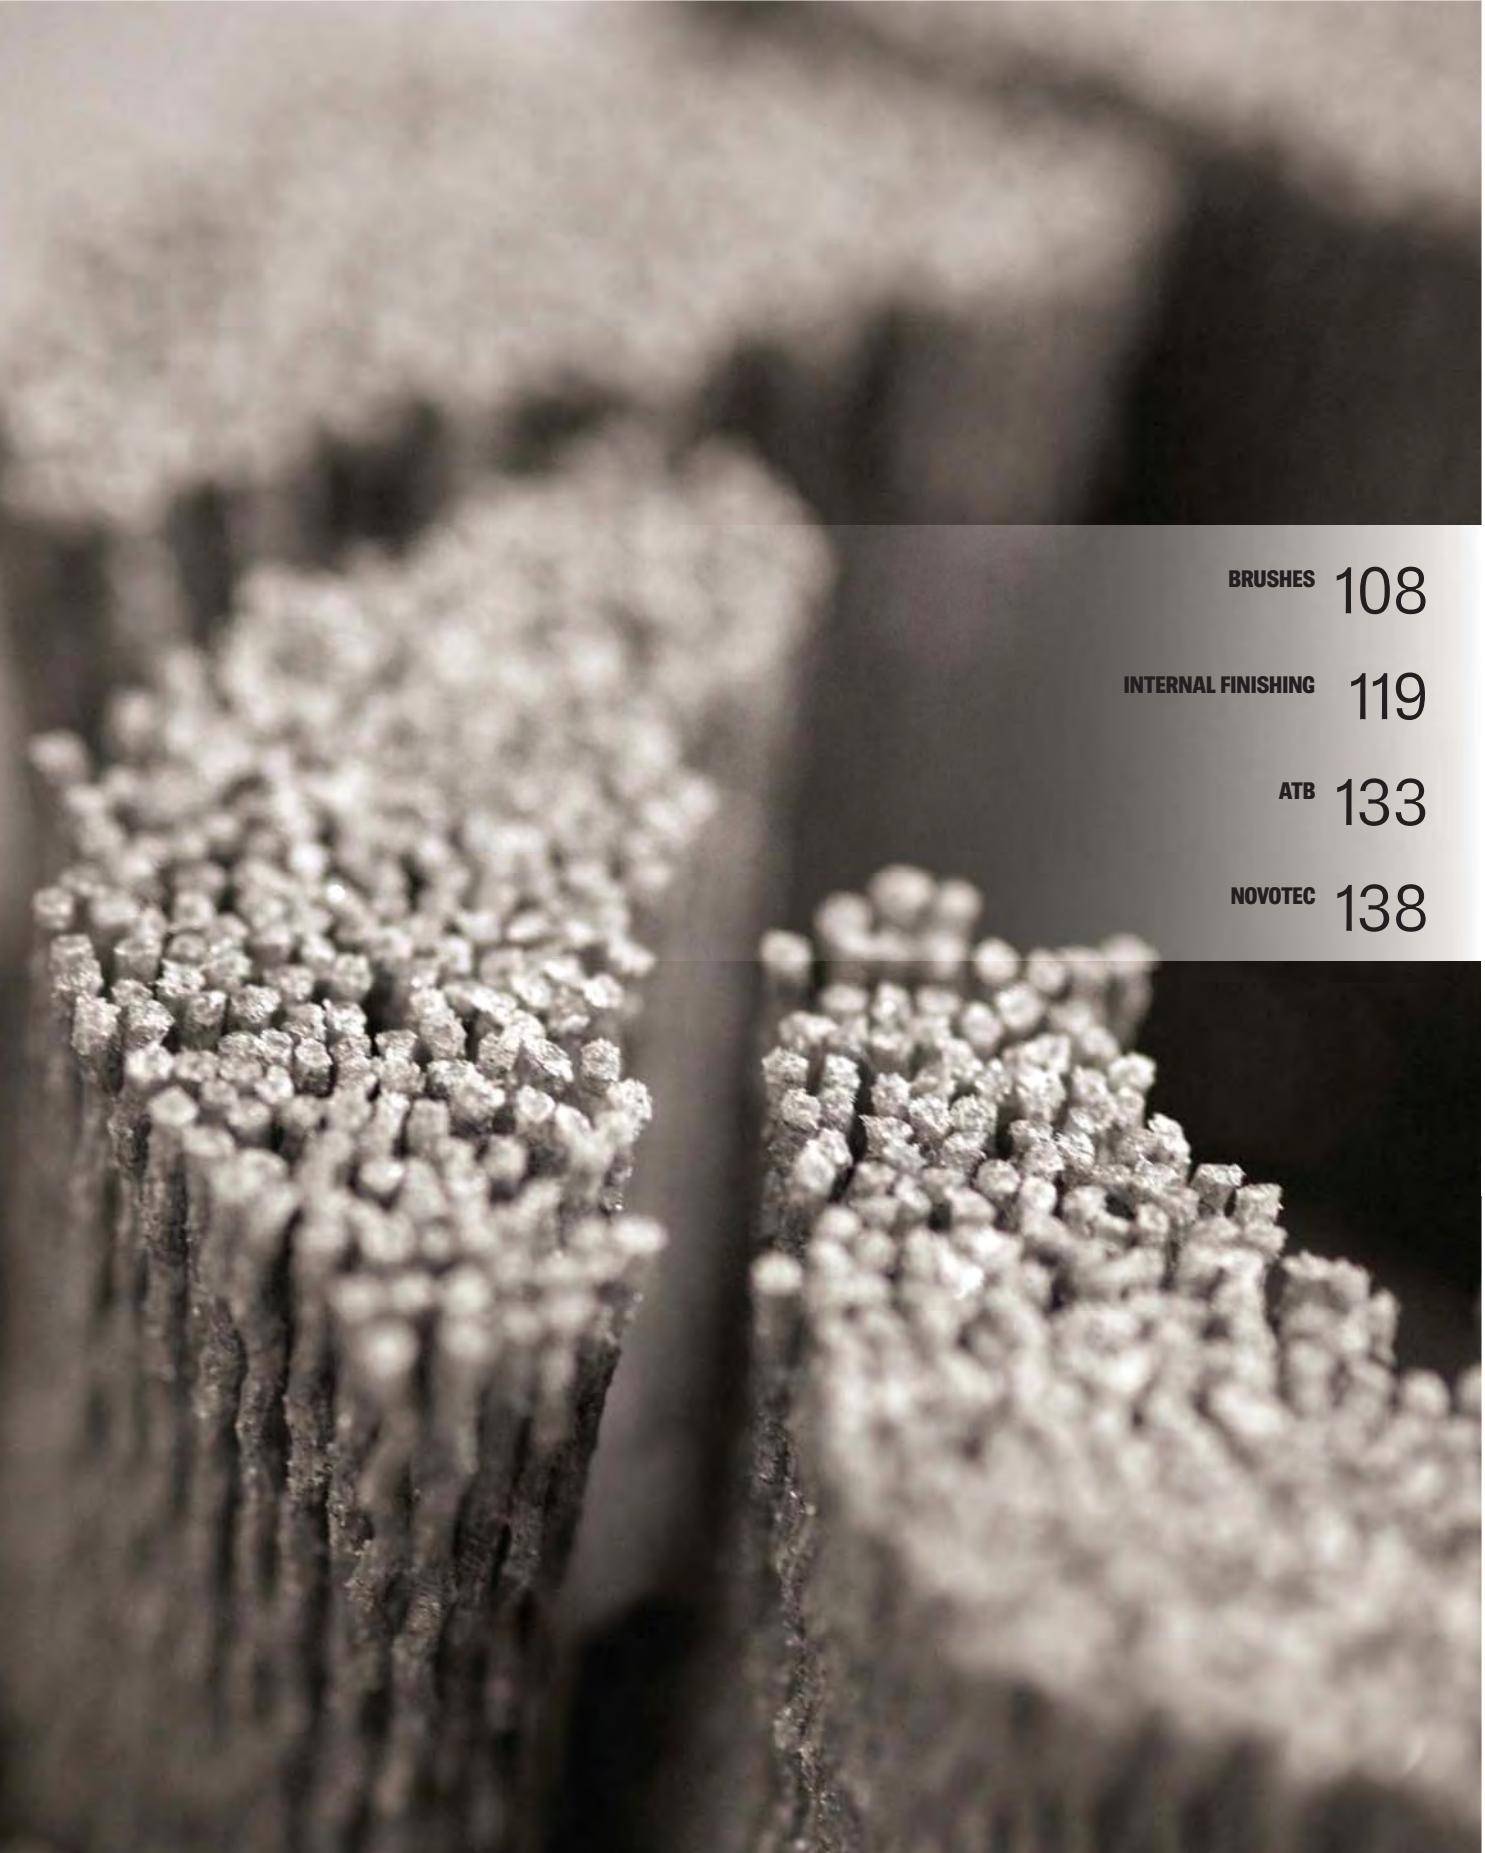

BRUSHES 108

INTERNAL FINISHING 119

ATB 133

NOVOTEC 138

Brushtechnology Industrial Brushes



Important user information Brushes for stationary machines



To be noted when selecting brushes and using stationary machines:

1. General user information


Brushes for stationary machines are suitable for bench deburrers, double grinders and special deburring machines.

2. Typical brushes for stationary machines



Wheel brushes

Available with knotted and crimped wire, as well as abrasive filaments.

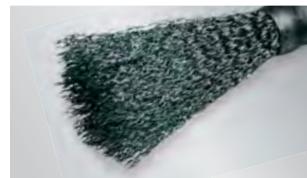

End brushes

Available for brush heads for cut edge finishing.

Standard bores for single-row brushes

We can change the standard bores according to your adapter.

Please see the below table to define the articles for standard bores for single-row brushes.

Ø Brush		Ø Bore (mm)		13	15,9	16	19	20	22,2	25,4	30	31,75	32	35	38	40	44	50,8
mm	"	Zoll / Inch (")		0002007413	0002007415	0002007416	0002007419	0002007420	0002007422	0002007425	0002007430	0002007431	0002007432	0002007435	0002007438	0002007440	0002007444	0002007450
75	3			✓														
100	4			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓					
125	5			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓					
150	6			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓					
178	7			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓			
200	8						✓	✓	✓	✓	✓	✓	✓	✓	✓			
250	10							✓	✓	✓	✓	✓	✓	✓				
300	12								✓	✓	✓	✓	✓	✓				
350	14									✓	✓	✓	✓	✓				

Brushes altered to bore 50,8/2" can be further reduced by 4M adapters with keyways.

Standard bores for multiple-row brushes

Via pipe mounted multiple-row brushes are reduced through assembly of our on stock robust metal adapters.

Please see below table for available adapters according to pipe diameter.

Article numbers always start with 000200- and the respective individual article number of the adapter is to be added to it in your order.

Ø Pipe		Ø Bore (mm)		9,53	10	12,7	13	16	19	20	22,2	25,4	30	31,8	32	35	40	50,8
mm	"	Zoll / Inch (")		3/8"		1/2"		5/8"	3/4"		7/8"	1"		1 1/4"			2"	
20				8109	8110	8112	8113	8116		8220	8222	8225						
30					8209	8210	8212	8213	8216	8219	8420	8422	8425					
50,8	2					8412	8413	8416	8419	8416	8620	8622	8625	8430	8431	8432	8435	
80							8616	8619		8720	8722	8725	8730	8731	8732	8735	8640	
100											8825	8830	8831	8832	8835	8840	8642	
120																	8842	

In case of doubt, don't hesitate to contact our Sales staff. We are happy to support you.



Important: If you don't state another bore with your order, the brush will be delivered to you with standard bore „B min“.

Brushtechology Industrial

Brushes

Wheel brushes

knotted wire



High performance version with knotted wire for demanding cleaning work and deburring.



USAGE

roughening	<input type="checkbox"/>	0,26
planing	<input checked="" type="checkbox"/>	0,35
deburring	<input checked="" type="checkbox"/>	0,50
edge honing	<input checked="" type="checkbox"/>	0,60
structuring	<input type="checkbox"/>	0,80
descaling/paint stripping	<input checked="" type="checkbox"/>	
weld seams	<input checked="" type="checkbox"/>	

TRIM AND MATERIAL


Products available with:

Steel wire twist knot →

Steel	<input checked="" type="checkbox"/>	Cast steel	<input checked="" type="checkbox"/>	Stainless steel	<input type="checkbox"/>
Aluminium	<input type="checkbox"/>	Non-ferrous metal	<input type="checkbox"/>	Soft wood	<input type="checkbox"/>
Soft wood	<input type="checkbox"/>	Hard wood	<input type="checkbox"/>		

mm							max	Order-No.	RRP	Order-No.	RRP	Order-No.	RRP
Ø	A	T	B min.	B max.	rpm	pcs.			€		€		€
200	13	42	20	40	8500	1	0002-664 131		0002-664 151		0002-664 181		
200	26	42	50,8	50,8	8500	1			0002-664 152				
250	15	42	25,4	40	4500	2	0002-676 131		0002-676 151		0002-676 181		
300	18	55	25,4	40	3600	2	0002-686 131		0002-686 151		0002-686 181		

For other bore sizes, see table "Standard bore for single-row brushes" on page 108.

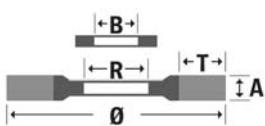

Joint brushes


knotted wire



For road building to clean expansion joints/gaps and narrow spots with thin working width.


mm							max	Order-No.	RRP	Order-No.	RRP	Order-No.	RRP
Ø	A	T	B	rpm	pcs.				€		€		€
300	4	65	20	4500	6	9802-026 560							
300	6	65	20	4500	6	9802-026 561		9802-026 581					
300	8	65	20	4500	6	9802-026 562		9802-026 582					
300	10	65	20	4500	6	9802-026 563		9802-026 583					

For other bore sizes, see table "Standard bore for single-row brushes" on page 108.

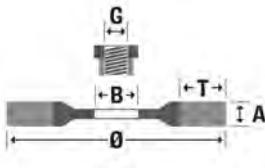


Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushtechnology Industrial Brushes

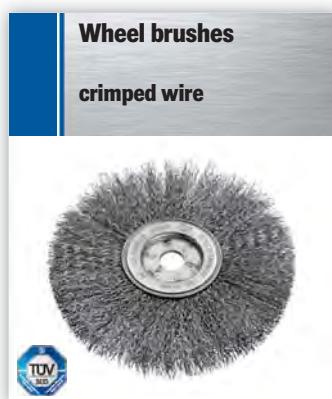

Narrow version for easy self-installation to achieve larger working widths.

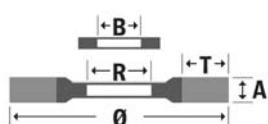

USAGE		TRIM AND MATERIAL																																																																																					
		<table border="1"> <tr> <td>roughening</td><td>0,15</td> <td>0,20</td> <td>0,25</td> <td>0,27</td> <td>0,30</td> <td>0,35</td> <td>0,40</td> <td>0,50</td> <td></td> <td></td> </tr> <tr> <td>planing</td><td>■■■■■</td><td>□□□□□</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>deburring</td><td>■■■■■</td><td>□□□□□</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>edge honing</td><td>■■■■■</td><td>□□□□□</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>structuring</td><td>□□□□□</td><td>□□□□□</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>descaling/paint stripping</td><td>■■■■■</td><td>□□□□□</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>weld seams</td><td>■■■■■</td><td>□□□□□</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>									roughening	0,15	0,20	0,25	0,27	0,30	0,35	0,40	0,50			planing	■■■■■	□□□□□									deburring	■■■■■	□□□□□									edge honing	■■■■■	□□□□□									structuring	□□□□□	□□□□□									descaling/paint stripping	■■■■■	□□□□□									weld seams	■■■■■	□□□□□								
roughening	0,15	0,20	0,25	0,27	0,30	0,35	0,40	0,50																																																																															
planing	■■■■■	□□□□□																																																																																					
deburring	■■■■■	□□□□□																																																																																					
edge honing	■■■■■	□□□□□																																																																																					
structuring	□□□□□	□□□□□																																																																																					
descaling/paint stripping	■■■■■	□□□□□																																																																																					
weld seams	■■■■■	□□□□□																																																																																					
		<table border="1"> <tr> <td>Steel wire crimped</td> <td>Steel</td> <td>Cast steel</td> <td>Stainless steel</td> <td>Non/ferrous metal</td> <td>Aluminum</td> <td>Soft wood</td> <td>Hard wood</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Stainless steel</td> <td>■■■■■</td> <td>■■■■■</td> <td>■■■■■</td> <td>■■■■■</td> <td>■■■■■</td> <td>■■■■■</td> <td>■■■■■</td> <td></td> <td></td> <td></td> </tr> </table>									Steel wire crimped	Steel	Cast steel	Stainless steel	Non/ferrous metal	Aluminum	Soft wood	Hard wood				Stainless steel	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■																																																										
Steel wire crimped	Steel	Cast steel	Stainless steel	Non/ferrous metal	Aluminum	Soft wood	Hard wood																																																																																
Stainless steel	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■																																																																																

mm										0,20	RRP	0,30	RRP
Ø	A	T	B min.	B max.	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
75	11	15	13	13	10000	5					0002-511 161		
100	13	23	13	20	8000	8	0002-522 141		0002-522 161		0002-532 161		
125	15	35	13	20	6000	5					0002-544 141		
150	16	32	13	20	6000	4					0002-544 161		
150	16	32	13	20	6000	8					0002-554 141		
178	18	45	13	32	6000	4					0002-554 161		
178	18	45	13	32	6000	8					0002-566 141		
200	19	38	19	32	4500	1					0002-566 161		
250	22	35	20	50,8	3600	2					0002-576 141		
300	26	58	20	50,8	3000	1					0002-587 161		

For other bore sizes, see table "Standard bore for single-row brushes" on page 108.

mm										0,20	RRP	0,30	RRP
Ø	A	T	B min.	B max.	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
100	13	23	13	20	8000	8	0002-522 341		0002-522 361		0002-532 361		
125	15	35	13	20	6000	5			0002-544 341		0002-544 361		
150	16	32	13	32	6000	3			0002-554 341		0002-554 361		
178	18	45	13	32	6000	4			0002-566 341		0002-566 361		
200	19	38	19	50,8	4500	2			0002-576 341		0002-576 361		
250	22	35	20	50,8	3600	2			0002-587 341		0002-587 361		
300	26	58	20	50,8	3000	2							

For other bore sizes, see table "Standard bore for single-row brushes" on page 108.



To remove chips on the band saw or circular saw blades in order to protect the teeth.
Increases the service life of the saw blade and optimizes cutting accuracy. Nylon trim for plastics and wood.

mm										Nylon 0,80	RRP
Ø	A	T	B	rpm	pcs.	Order-No.	€			Order-No.	€
100	15	20	13	8000	10	0003-515 827					



Brushtechology Industrial


Brushes

Wheel brushes

crimped Osborn wire



Narrow version for easy self-installation to achieve larger working widths, combining several brushes on one shaft. Specially hardened wire for industrial applications.

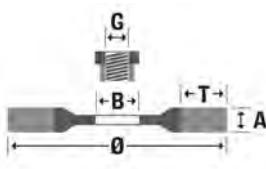

USAGE



roughening	<input type="checkbox"/>	0,15
planing	<input checked="" type="checkbox"/>	0,20
deburring	<input checked="" type="checkbox"/>	0,25/0,27
edge honing	<input checked="" type="checkbox"/>	0,30
structuring	<input checked="" type="checkbox"/>	0,35
descaling/paint stripping	<input checked="" type="checkbox"/>	0,40
weld seams	<input checked="" type="checkbox"/>	0,50

TRIM AND MATERIAL

Products available with:

Steel wire crimped



Steel	<input checked="" type="checkbox"/>
Cast steel	<input checked="" type="checkbox"/>
Stainless steel	<input checked="" type="checkbox"/>
Non-ferrous metal	<input checked="" type="checkbox"/>
Aluminium	<input checked="" type="checkbox"/>
Soft wood	<input checked="" type="checkbox"/>
Hard wood	<input checked="" type="checkbox"/>

Stainless steel



mm								Osborn 0,15	RRP	Osborn 0,20	RRP	Osborn 0,30	RRP
Ø	A	T	B	Adapt.	rpm	pcs.							
200	18	38	50,8	1-A	4500	2	9906-021183	9906-021184		9906-022082		9906-022085	
200	22	37	50,8	1-A	4500	1	9906-022081	9906-013008	9906-013009	9906-013021	9906-013057		
200	22	37	50,8	1-A	4500	2							
250	26	60	50,8	4-M	3600	2							
300	28	60	50,8	4-M	3000	2							
380	32	72	50,8	4-M	2400	2							

For other bore sizes, see Adapters on page 117.

mm								Osborn 0,26	RRP			
Ø	A	T	B	Adapt.	rpm	pcs.						
150	14	29	31,75	3-A	6000	6	9906-021059					


For other bore sizes, see Adapters on page 117.

Wheel brushes

crimped wire



Compatible deburring brush with high wire density for use in stationary machines such as benchtop grinders and tabletop deburrers.

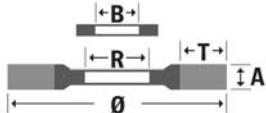

USAGE



roughening	<input type="checkbox"/>	0,15
planing	<input checked="" type="checkbox"/>	0,20
deburring	<input checked="" type="checkbox"/>	0,25/0,27
edge honing	<input checked="" type="checkbox"/>	0,30
structuring	<input checked="" type="checkbox"/>	0,35
descaling/paint stripping	<input checked="" type="checkbox"/>	0,40
weld seams	<input checked="" type="checkbox"/>	0,50

TRIM AND MATERIAL

Products available with:

Steel wire crimped



Steel	<input checked="" type="checkbox"/>
Cast steel	<input checked="" type="checkbox"/>
Stainless steel	<input checked="" type="checkbox"/>
Non-ferrous metal	<input checked="" type="checkbox"/>
Aluminium	<input checked="" type="checkbox"/>
Soft wood	<input checked="" type="checkbox"/>
Hard wood	<input checked="" type="checkbox"/>

Stainless steel




mm								0,20	RRP	0,30	RRP	0,50	RRP
Ø	A	T	B min.	B max.	R	rpm	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
75	19	16		20	20	10000	4	9902-511162					
100	20	23		20	30	8000	5	9902-522142	9902-522162				
100	28	23		20	30	8000	5	9902-522163	9902-522163				
125	22	30		20	30	6000	5	9902-532142	9902-532162				
125	30	30		20	30	6000	5	9902-532163	9902-532163				
150	21	25	31,75	50,8	6000	3	9902-544441	9902-544461					
150	30	29	31,75	50,8	6000	3	9902-544142	9902-544162					
150	37	29	31,75	50,8	6000	3	9902-544163	9902-544163					
178	23	38	31,75	50,8	6000	1	9902-554441	9902-554461					
178	32	38	31,75	50,8	6000	1	9902-554142	9902-554162					
178	38	38	31,75	50,8	6000	1	9902-554163	9902-554163					
200	20	38	31,75	80	4500	1	9902-566441	9902-566461					
200	30	38	31,75	80	4500	1	9902-566142	9902-566162					
200	38	38	31,75	80	4500	1	9902-566143	9902-566163					
250	28	47	20	50,8	100	3600	1	9902-576142	9902-576162				
250	38	47	20	50,8	100	3600	1	9902-576143	9902-576163				
250	55	47	20	50,8	100	3600	1	9902-576464	9902-576464				
300	32	50	25,4	50,8	120	3000	1	9902-587142	9902-587162				
300	46	50	50,8	101,6	151		1	9902-587143	9902-587163				
300	44	50	25,4	50,8	120	3000	1	9902-587193	9902-587193				




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushtechnology Industrial Brushes

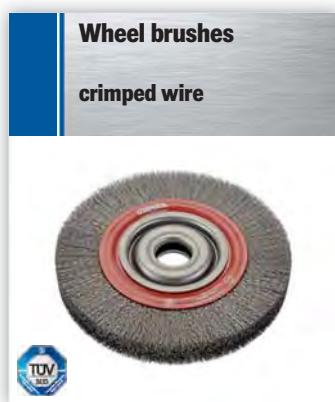

Compatible deburring brush with high wire density for use in stationary machines such as benchtop grinders and tabletop deburrers.

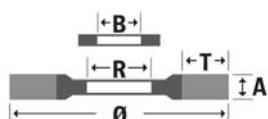

USAGE									
roughening									
planing									
deburring									
edge honing									
structuring									
descaling/paint stripping									
weld seams									
0,15									
0,20									
0,25/0,27									
0,30									
0,35									
0,40									
0,50									

TRIM AND MATERIAL

Products available with:


Steel wire crimped

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
■	■	■	■	■	■	■


Stainless steel

Brass wire

Ø	A	T	mm	B min.	B max.	R	rpm	pcs.	0,20	RRP	0,30	RRP	
									Order-No.		Order-No.		
75	19	16			20	20	10000	4	9902-511 362				
100	20	23			20	30	8000	4	9902-522 342	9902-522 362			
100	28	23			20	30	8000	4	9902-522 363	9902-522 363			
125	22	30			20	30	6000	2	9902-532 342	9902-532 362			
125	30	30			20	30	6000	2	9902-532 343	9902-532 363			
150	21	25			31,75	50,8	6000	2	9902-544 341	9902-544 361			
150	30	29			31,75	50,8	6000	2	9902-544 342	9902-544 362			
178	23	38			31,75	50,8	6000	1	9902-554 341	9902-554 361			
178	32	38			31,75	50,8	6000	1	9902-554 362	9902-554 362			
200	20	38			31,75	80	4500	1	9902-566 341	9902-566 361			
200	30	38			31,75	80	4500	1	9902-566 342	9902-566 362			
200	38	38			31,75	80	4500	1	9902-566 363	9902-566 363			
250	28	47			20	50,8	100	3600	1	9902-576 342	9902-576 362		
250	38	47			20	50,8	100	3600	1	9902-576 343	9902-576 363		
300	32	50			25,4	50,8	120	3000	1	9902-587 342	9902-587 362		
300	44	50			25,4	50,8	120	3000	1	9902-587 343	9902-587 363		

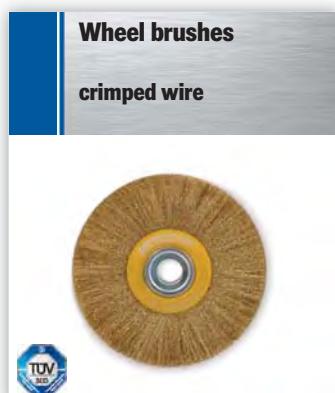

Flexible, soft wheel brush for fine surface finishing. Conforms to the contours of the work piece thanks to its long bristles.

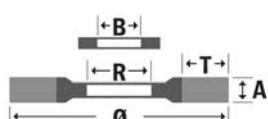

USAGE									
roughening									
planing									
deburring									
edge honing									
structuring									
descaling/paint stripping									
weld seams									
0,15									
0,20									
0,25/0,27									
0,30									
0,35									
0,40									
0,50									

TRIM AND MATERIAL

Products available with:

Steel wire crimped

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood
■	■	■	■	■	■	■

Stainless steel

Brass wire

Ø	A	T	mm	B min.	B max.	R	rpm	pcs.	0,20	RRP	0,30	RRP	
									Order-No.		Order-No.		
150	24	43			20	30	6000	2	9902-543 142	9902-543 162			
150	32	43			20	30	6000	3	9902-543 163	9902-543 163			
178	32	43			31,75	50,8	6000	1	9902-553 162	9902-553 162			
178	40	43			31,75	50,8	6000	1	9902-553 163	9902-553 163			
200	33	55			31,75	50,8	4500	1	9902-565 142	9902-565 162			
200	42	55			31,75	50,8	4500	1	9902-565 143	9902-565 163			
250	32	63			20	50,8	80	3600	1	9902-575 142	9902-575 163		
300	33	70			25,4	50,8	100	3000	1	9902-586 142	9902-586 162		
300	45	70			25,4	50,8	100	3000	1	9902-586 143	9902-586 163		

Ø	A	T	mm	B min.	B max.	R	rpm	pcs.	0,20	RRP	0,30	RRP
									Order-No.		Order-No.	
150	24	43			20	30	6000	2	9902-543 542	9902-543 562		
150	32	43			20	30	6000	2	9902-543 543	9902-543 563		
178	32	43			31,75	50,8	6000	1	9902-553 542	9902-553 562		
200	33	55			31,75	50,8	4500	1	9902-565 542	9902-565 562		

Universal usage of the brushes through a range of bore adapters:

Ø 75-125 mm: 20 mm = 1/2"; 5/8" Ø 150-200 mm: 31,75 mm = 13mm; 15mm; 16mm; 19mm; 20 mm; 7/8"; 1"


Important: When ordering brushes Ø 250-300 mm please clearly state your arbor hole requirements.

Brushtechology Industrial Brushes

Wheel brushes for deburring machines crimped wire



Very wide and compact brush for tabletop deburrers for finishing cut edges.

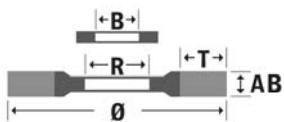

USAGE

	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50
roughening	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
planing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
deburring	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
edge honing	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
structuring	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
descaling/paint stripping	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
weld seams	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

TRIM AND MATERIAL

Products available with:

Steel wire crimped



Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
<input type="checkbox"/>	<input checked="" type="checkbox"/>					

mm								max.	Order-No.	RRP	Order-No.	RRP	Order-No.	RRP
Ø	AB	KB	T	B	R	rpm	pcs.		0,20	€	0,30	€	0,35	€
250	60	55	45	100	100	3600	1		0002-576 145		0042-576 165		0042-576 175	

mm								max.	Order-No.	RRP
Ø	AB	KB	T	B	R	rpm	pcs.		0,50	RRP
250	60	55	45	100	100	3600	1		0002-576 195	


mm								max.	Order-No.	RRP	Order-No.	RRP	Order-No.	RRP
Ø	AB	KB	T	B	R	rpm	pcs.		0,20	€	0,30	€	0,35	€
250	60	55	45	100	100	3600	1		0002-576 345		0042-576 365		0042-576 375	

For other bore sizes, see Axle discs on page 114.

Wheel brushes for deburring machines abrasive filament



Very wide and compact brush for tabletop deburrers for finishing cut edges.

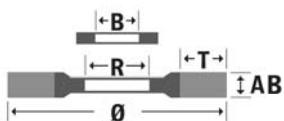

USAGE

	40/46	60	80	120	180	320	Fibre
roughening	<input checked="" type="checkbox"/>	<input type="checkbox"/>					
planing	<input type="checkbox"/>	<input type="checkbox"/>					
deburring	<input type="checkbox"/>	<input type="checkbox"/>					
edge honing	<input type="checkbox"/>	<input type="checkbox"/>					
structuring	<input checked="" type="checkbox"/>	<input type="checkbox"/>					
descaling/paint stripping	<input type="checkbox"/>	<input type="checkbox"/>					
weld seams	<input type="checkbox"/>	<input type="checkbox"/>					

TRIM AND MATERIAL

Products available with:

Abrasive bristle

Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminium	Soft wood	Hard wood
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
<input type="checkbox"/>	<input checked="" type="checkbox"/>					

mm								max.	Order-No.	RRP	Order-No.	RRP	Order-No.	RRP
Ø	AB	KB	T	B	R	rpm	pcs.		grit 80/1,27	RRP	grit 120/1,02	RRP	grit 180/0,90	RRP
250	60	55	45	100	100	3600	1		2102-576 916		0002-576 906		0002-576 916	

mm								max.	Order-No.	RRP
Ø	AB	KB	T	B	R	rpm	pcs.		grit 320/0,56	RRP
250	60	55	45	100	100	3600	1		0002-576 926	

For other bore sizes, see Axle discs on page 114.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushtechnology Industrial Brushes




USAGE		TRIM AND MATERIAL																																																																																							
		<table border="1"> <tr> <td>roughening</td> <td>0,15</td> <td>0,20</td> <td>0,25/0,27</td> <td>0,30</td> <td>0,35</td> <td>0,40</td> <td>0,50</td> <td></td> <td></td> <td></td> </tr> <tr> <td>planing</td> <td>■■■■■</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td></td> <td></td> <td></td> </tr> <tr> <td>deburring</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td></td> <td></td> <td></td> </tr> <tr> <td>edge honing</td> <td>□□□□□</td> <td>■■■■■</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td></td> <td></td> <td></td> </tr> <tr> <td>structuring</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td></td> <td></td> <td></td> </tr> <tr> <td>descaling/paint stripping</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td></td> <td></td> <td></td> </tr> <tr> <td>weld seams</td> <td>□□□□□</td> <td>■■■■■</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td>□□□□□</td> <td></td> <td></td> <td></td> </tr> </table>											roughening	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50				planing	■■■■■	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□				deburring	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□				edge honing	□□□□□	■■■■■	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□				structuring	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□				descaling/paint stripping	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□				weld seams	□□□□□	■■■■■	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□			
roughening	0,15	0,20	0,25/0,27	0,30	0,35	0,40	0,50																																																																																		
planing	■■■■■	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□																																																																																		
deburring	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□																																																																																		
edge honing	□□□□□	■■■■■	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□																																																																																		
structuring	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□																																																																																		
descaling/paint stripping	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□																																																																																		
weld seams	□□□□□	■■■■■	□□□□□	□□□□□	□□□□□	□□□□□	□□□□□																																																																																		
		<p>Products available with:</p> <table border="1"> <tr> <td>Steel wire crimped</td> <td>Steel</td> <td>Cast steel</td> <td>Stainless steel</td> <td>Non-ferrous metal</td> <td>Aluminum</td> <td>Soft wood</td> <td>Hard wood</td> </tr> <tr> <td>Stainless steel</td> <td>Green</td> <td>Green</td> <td>Green</td> <td>Green</td> <td>Green</td> <td>Green</td> <td>Green</td> </tr> </table>										Steel wire crimped	Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood	Stainless steel	Green	Green	Green	Green	Green	Green	Green																																																														
Steel wire crimped	Steel	Cast steel	Stainless steel	Non-ferrous metal	Aluminum	Soft wood	Hard wood																																																																																		
Stainless steel	Green	Green	Green	Green	Green	Green	Green																																																																																		

mm										0,35	RRP	0,35	RRP	0,30	RRP
Ø	AB	KB	T	B	R	rpm	pcs.	Order-No.	€						
300	460	440	60	120	120	3600	1	4602-743 178		7602-743 378					
300	620	600	60	120	120	3600	1	8802-753 478							1302-753 368

Price on request.

More wheel brushes for all common deburring machines available on request.

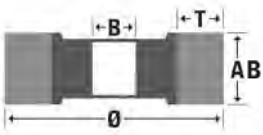

mm											Order-No.	Order-No.	Order-No.
B	Keyway		pcs.	Order-No.		Order-No.		Order-No.					
50,8	13,2x7,1		1	5495-560 051									
52,9	13,5x6,4		1	5495-560 052									
54,7	13,6x5,8		1	5495-560 054									
80,2	13,5x7,5		1	5495-560 080									
82	13,5x6,4		1	5495-560 082									

Price on request.

One-way axle discs for tabletop deburrers.


Brushtechology Industrial Brushes

Wheel brushes

abrasive filament



Abrasive bristle for wet and dry applications. Resistant to weak acids and alkaline solutions. Flexible, the brush adapts to the work piece. Industrial version.

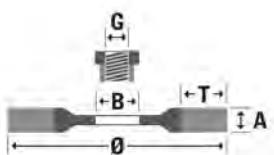

USAGE

roughening	40/46
planing	60
deburring	80
edge honing	120
structuring	180
descaling/paint stripping	320
weld seams	Fibre

TRIM AND MATERIAL

Products available with:

Abrasive bristle




Ø	A	T	B	Adapt.	rpm	max	pcs.	grit 80		RRP	grit 120 1,02		RRP	grit 180		RRP
								Order-No.	€		Order-No.	€		Order-No.	€	
75	12	15	5/8"	F	20000	6	9906-015 001			9906-015 002			9906-015 003			
100	13	20	5/8"	F	12000	6	9906-015 025			9906-015 026			9906-015 027			
125	16	30	5/8"	F	12000	6	9906-015 035			9906-015 036			9906-015 037			
150	17	32	7/8"	F	8000	6	9906-015 079			9906-015 080			9906-015 081			
178	20	47	7/8"	F	8000	2	9906-015 040			9906-015 041			9906-015 042			
200	18	35	2"	4-M	6000	2	9906-015 050			9906-015 051			9906-015 052			
250	18	35	2"	4-M	3000	2	9906-015 056			9906-015 057			9906-015 058			
250	18	60	2"	4-M	3600	2	9946-015 056			9946-015 057			9946-015 058			
300	18	35	2"	4-M	2400	2	9906-015 062			9906-015 063			9906-015 064			
300	18	60	2"	4-M	3000	2	9966-015 063			9966-015 064			9966-015 064			
350	19	55	2"	4-M	2400	2	9906-015 069			9906-015 070			9906-015 070			

Ø	A	T	B	Adapt.	rpm	max	pcs.	grit 320		RRP	grit 120 0,65		RRP
								Order-No.	€		Order-No.	€	
75	12	15	5/8"	F	20000	6	9906-015 004			9916-015 026			
100	13	20	5/8"	F	12000	6	9906-015 028						
125	16	30	5/8"	F	12000	6	9906-015 038						
150	17	32	7/8"	F	8000	6	9906-015 082						
178	20	47	7/8"	F	8000	2	9906-015 043			9916-015 041			
200	18	35	2"	4-M	6000	2	9906-015 053			9916-015 051			
250	18	35	2"	4-M	3000	2	9906-015 059			9916-015 057			
250	18	60	2"	4-M	3600	2	9946-015 059						
300	18	35	2"	4-M	2400	2	9906-015 065						
300	18	60	2"	4-M	3000	2	9966-015 065						
350	19	55	2"	4-M	2400	2	9906-015 071			9916-015 069			




Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushtechnology Industrial Brushes

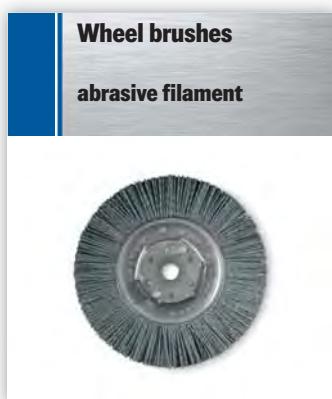

Abrasive bristle for dry applications.

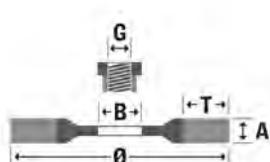

		USAGE		TRIM AND MATERIAL									
				roughening	40/46	60	80	120	180	320	Fibre		
				planing	□	□	□	□	□	□		Steel	
				deburring	□	□	□	□	□	□		Cast steel	
				edge honing	□	□	□	□	□	□		Stainless steel	
				structuring	■	■	■	■	■	■		Non-ferrous metal	
				descaling/paint stripping	■	■	■	■	■	■		Aluminum	
				weld seams	□	□	□	□	□	□		Soft wood	
												Hard wood	

Products available with:

Abrasive bristle



Ø	A	T	B min.	B max.	Adapt.	rpm	pcs.	grit 80		RRP	grit 120		RRP	grit 180		RRP
								Order-No.	€		Order-No.	€		Order-No.	€	
75	12	13		13		20000	6	9902-515 001		9902-515 002			9902-515 003			
100	18	18	13	20		12000	6	9902-515 025		9902-515 026			9902-515 027			
150	18	32	13	32	F	8000	6	9902-515 079		9902-515 080			9902-515 081			
178	20	45	13	32	F	8000	4	9902-515 040		9902-515 041			9902-515 042			
200	18	35	19	50,8	4-M	6000	2	9902-515 050		9902-515 051			9902-515 052			
250	20	35	20	50,8	4-M	3600	2	9902-515 056		9902-515 057			9902-515 058			
250	18	60	20	50,8	4-M	3000	2	9962-515 056		9962-515 057			9962-515 058			
300	20	35	20	50,8	4-M	2400	2	9902-515 062		9902-515 063			9902-515 064			
300	20	60	20	50,8	4-M	3000	2	9962-515 062		9962-515 063			9962-515 064			
350	20	57	32	50,8	4-M	2400	2	9902-515 069								

Ø	A	T	B min.	B max.	Adapt.	rpm	pcs.	Novofil 320		RRP					RRP
								Order-No.	€		Order-No.	€	Order-No.	€	
75	12	13		13		20000	6	9902-515 004							
100	18	18	13	20		12000	6	9902-515 028							
150	18	32	13	32	F	8000	6	9902-515 082							
178	18	45	13	32	F	8000	4	9902-515 043							
200	18	35	19	50,8	4-M	6000	2	9902-515 053							
250	18	60	20	50,8	4-M	3000	2	9962-515 059							
300	20	35	20	50,8	4-M	2400	2	9902-515 065							
300	20	60	20	50,8	4-M	3000	2	9962-515 065							

For other bore sizes, see table "Standard bore for single-row brushes" on page 108.



To deburr the raw edge of tubes/profiles or flat surfaces. A set (8, 16, 24 pcs) are fitted in a brush head.




		USAGE		TRIM AND MATERIAL									
		roughening	80	120	120 Mix	180	20	27	35	50			
		planing	□	□	□	□	□	□	□	□	Steel		
		deburring	■	■	■	■	■	■	■	■	Cast steel		
		edge honing	■	■	■	■	■	■	■	■	Stainless steel		
		structuring	□	□	□	□	□	□	□	□	Non-ferrous metal		
		descaling/paint stripping	□	□	□	□	□	□	□	□	Aluminum		
		weld seams	□	□	□	□	□	□	□	□	Soft wood		
											Hard wood		

Products available with:

Steel wire straight

Stainless steel

Abrasive bristle

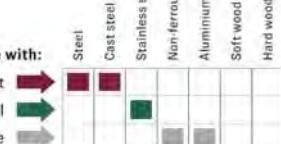

Ø	T	L	pc.	0,20		RRP	0,35		RRP	0,50		RRP
				Order-No.	€		Order-No.	€		Order-No.	€	
25	95	25	16	0002-509 448			0002-509 478			0002-509 498		
25	95	25	16	0002-509 348			0002-509 908			5702-509 938		

Ø	T	L	pc.	0,20		RRP	grit 80		RRP	grit 120, 0,20 rostfrei		RRP
				Order-No.	€		Order-No.	€		Order-No.	€	
25	95	25	16	0002-509 348			0002-509 908			5702-509 938		




4-M adapter for thin wheel brushes with bore 2" (50.8 mm) tapered grooves; reusable.

mm			RRP			
B	Inch	pcs.	Order-No.	€	Order-No.	€
12,7	1/2"	1	0003-075 064			
16	5/8"	1	0003-075 065			
19	3/4"	1	0003-075 066			
22,2	7/8"	1	0003-075 067			
25,4	1"	1	0003-075 068			
28	1 1/8"	1	0003-075 069			
31,75	1 1/4"	1	0003-075 070			
38	1 1/2"	1	0003-075 071			
50,8	2"	1	0003-075 073			



For reduction of arbor holes.



Inch			UVP			
Inner Ø	Outer Ø	pcs.	Order-No.	€	Order-No.	€
1/2"	5/8"	1	0003-000 223			
3/8"	7/8"	1	0003-000 242			
1/2"	7/8"	1	0003-000 243			
5/8"	7/8"	1	0003-000 244			



1-A adapter for bore 2" (50.8 mm) round; reusable.

3-A adapter for bore 11/14" (31.75 mm) round; reusable.

Inch				1-A	RRP	3-A	RRP	
B	Ø	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
1/2"		1	0103-075 021		0103-075 048			
3/4"		1			0103-075 050			
1 1/4"		1	0103-075 027					
1 1/2"		1	0103-075 028					



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushtechnology Industrial Brushes



mm B	 pcs.	1-A	RRP	3-A		RRP	
				Order-No.	€	Order-No.	€
10	1	0103-075 210					
13	1	0103-075 213		0103-075 313			
16	1	0103-075 216		0103-075 316			
20	1	0103-075 220		0103-075 320			
25	1	0103-075 225		0103-075 325			
30	1	0103-075 230					
32	1	0103-075 232					
35	1	0103-075 235					
40	1	0103-075 240					

1-A adapter for bore 2" (50,8 mm) round;
reusable.

3-A adapter for bore 11/14" (31,75 mm) round;
reusable.

Brushtechology Industrial
Internal finishing



BRUSHTECHNOLOGY
INDUSTRIAL

Brushtechnology Industrial

Internal finishing



Important user information

Brushes for internal finishing



To be noted when selecting brushes
for internal finishing:

1. General user information

Brushes for internal finishing are suitable for use with hand-held and stationary tools with drill or jaw chucks and tool spindles. Some products are designed exclusively for manual operation.

2. Typical brushes for internal finishing

Some typical brushes used for internal finishing are shown below. The product overview on the following pages provides details of the whole range.




Helituf



Novoflex B



Novoflex S1

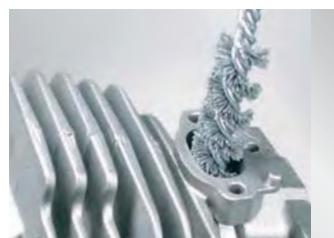

Micro-abrasive tube brush



Finding the right tool

Please check your product choice using the information in the info heading.

This will tell you the application for each product and its suitability, as well as providing a summary of the available trim materials suitable for the material being finished.

USE	NHA 600/NHS 1000	Nylon-diamond 400+800	Orig. Ost. wire 0.08-0.20	Filament brush 80-320	Novofil WF 120+320	Crimped Steel wire 0.15-0.50	Nylon/Natural fibre
Internal cleaning, general	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Deburring	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Brushing edges/tapered grooves	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Rust removal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Cleaning threads/holes	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Plateau finish	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

TRIM AND MATERIALS							
Product available with:							
Steel wire, knotted		<input type="checkbox"/>					
Steel wire, crimped		<input type="checkbox"/>					
Steel wire, stainless		<input type="checkbox"/>					
Brass wire		<input type="checkbox"/>					
Abrasive bristle		<input type="checkbox"/>					
Nylon-diamond		<input type="checkbox"/>					
Natural bristle		<input type="checkbox"/>					
Steel	Cast iron	Stainless steel	Non-ferrous metal	Aluminium	Softwood	Hardwood	

PROFESSIONAL INTERNAL FINISHING

Product and material	Properties	Use
SITUFT  <p>Internal brushes with crimped original Osborn wire, fastened in a wing-shaped form.</p>	<p>Quick and easy to clamp in a wide variety of machines using different adapters. Designed for hand-held (e.g. pneumatic and electric tools), as well as stationary machines. The brushes can be clamped in collet chucks, jaw chucks and tool spindles.</p>	<p>For cleaning holes and internal surfaces that are difficult to reach, as well as longitudinal grooves.</p>

i Clockwise or anti-clockwise operation possible using an adapter. Can only be used in a clockwise direction without an adapter. The larger the diameter, the greater the flexibility of the brush.

HELITUF  <p>Internal brushes with original crimped Osborn wire, fastened in a spiral construction.</p>	<p>Designed for hand-held machines. The brushes can be mounted in drill sockets and on spindles. Chuck mounting is also possible using a Helituf adapter. The spiral-shaped construction simulates a stroke action.</p>	<p>To clean and deburr holes, to brush and deburr edges and tapered grooves.</p>
---	---	--

i An adapter can be used to increase the total length (incl. brush) to 225 mm.


Micro-abrasive  <p>Tube brushes with flexible silicon carbide or aluminium oxide trim. Special shaft available upon request.</p>	<p>For use in CNC and NC machines, as well as processing centres.</p>	<p>To clean condensers and boiler pipes, deburr, clean and roughen coated surfaces.</p>
---	---	---



Brushes should be 5 – 10% larger than the diameter of the hole.


Brushtechnology Industrial

Internal finishing

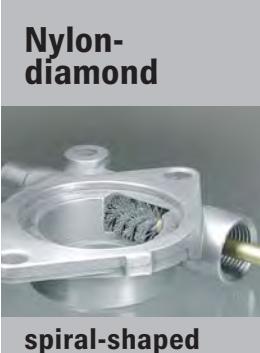Product and material	Properties	Use
Nylon-diamond  spiral-shaped	<p>Tube brush, spiral-shaped Galvanised twisted wire, stabilised with shaft of pressed brass sleeve.</p> <p>Flexible trim; after heavy usage and deformation the filaments will recover. Filaments flex rather than break. High flexibility and high performance. Easy clamping in collet and jaw chucks.</p>	<p>Edge rounding, deburring of cross holes, further finishing of honed surfaces. Surface roughness reduced significantly. Ideal for finishing hard components (e.g. ceramic), hardened parts, precision components and parts for spiral-shaped aerospace applications.</p>
<p>i Brushes should be 10 – 15% larger than the diameter of the hole.</p>		
Nylon-diamond  wing-shaped	<p>Tube brushes, wing-shaped Galvanised twisted wire, stabilised with shaft of pressed brass sleeve.</p> <p>Because of their very thin and flexible trim, the life of these brushes is longer than that of conventional brushes with a harder trim.</p>	<p>Deburring and finishing, e.g. of longitudinal grooves.</p>
<p>i Brushes should be 10 – 15% larger than the diameter of the hole.</p>		
Novoflex-B 	<p>Sturdy, self-centring honing tool. Flexible design with abrasive spheres.</p>	<p>Suitable for hand-held and honing machines. For use in CNC and NC machines, processing centres and automatic equipment, clamping in tool spindles also possible.</p> <p>Edge breaks, final finishing of top surfaces. For use in non-round bores and for deburring and finishing of bearing holes during engine production. To create an even, fine-ground surface with a high contact ratio (plateau finish). The resulting cross-hatching is an ideal base for oil film adhesion.</p>



Lubricants must always be used. We recommend lubricating the Novoflex-B with honing oil before use. Mineral oil, engine oil, water-soluble oil or cooling lubricants can be used as alternatives. Honing time: 20 – 40 sec. The process time can be reduced for deburring longitudinal and cross holes. Clean the bore using hot water and detergent and Osborn nylon tube brushes.

Product and material	Properties	Use
Novoflex-H  <p>Novoflex-H</p> <p>Flat brush with wing-shaped trim material, double wire core. Shaped on the outer contact surfaces to provide a larger working surface.</p> <p></p>	<p>Flexible trim; after heavy usage and deformation the filaments will recover. Filaments flex rather than break.</p> <p>These honing brushes are used in a clockwise, oscillating movement.</p> <p>Easy clamping in collet and jaw chucks.</p>	<p>Surface finishing of workpieces that do not require deburring, e.g. internal finishing of pipes, manufacture of piston pumps, engines.</p>



Brushes should be up to 25 % larger than the diameter of the hole.

Hole cleaning brushes, nozzle cleaning brushes, fitting brushes, terminal post brushes



Brushtechnology Industrial


Internal finishing



SITUFT®

crimped Osborn wire

Double wire core for compressed air and electric tools. Adapter to fix in various power tools.



W = workpiece diameter


USAGE		TRIM AND MATERIAL									
		Products available with: Steel wire crimped → Steel Stainless steel → Cast steel Stainless steel Non-ferrous metal Aluminium Soft wood Hard wood									

mm							Osborn 0,08	RRP	Osborn 0,13	RRP	Osborn 0,20	RRP
W	Ø	A	L	S	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
6,4	6,7	14	54	2,38	12	9907-035 021 *		9907-035 023 *				
8	8,4	14	54	2,38	12	9907-035 031 *		9907-035 032 *				
9,5	10	14	54	2,38	12	9907-035 041		9907-035 042 *				
11	11,5	14	54	2,38	12	9907-035 051		9907-035 052 *				
13	13,1	14	54	3,18	12	9907-035 061		9907-035 062 *				
14	14,5	16	54	3,18	12	9907-035 081		9907-035 082 *		9907-035 083 *		
16	16,3	16	54	3,18	12	9907-035 086		9907-035 087 *		9907-035 088		
18	19,2	16	54	3,18	12			9907-035 092		9907-035 093		
19	20,1	16	54	3,18	12	9907-035 096		9907-035 097		9907-035 098 *		
21	21,9	16	57	3,18	12			9907-035 102				
22	22,8	16	57	3,18	12			9907-035 107				
25	26	16	57	3,18	12			9907-035 117		9907-035 118 *		
29	29,8	16	57	3,18	12			9907-035 127		9907-035 128		
32	32,6	16	57	3,18	12	9907-035 137				9907-035 138 *		

* Parts included in the SITUFT®Set (Order-No. 9907-035 000).

mm							Osborn 0,13	RRP	Osborn 0,13	RRP	Osborn 0,13	RRP
W	Ø	A	L	S	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
6	6,7	14	54	2,38	12	9907-035 181						
13	13,1	14	54	3,18	12	9907-035 197						
16	16,3	16	54	3,18	12	9907-035 205						
19	20,1	16	54	3,18	12	9907-035 213						
22	22,8	16	57	3,18	12	9907-035 221						
25	26	16	57	3,18	12	9907-035 229						

* Parts included in the SITUFT®Set (Order-No. 9907-035 000).

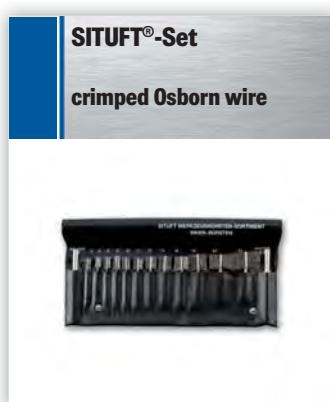

SITUFT®-Set

crimped Osborn wire

SITUFT® Set: 12 brushes D6 to D32 and two adapters. Parts in this set are marked by an asterix in the previous table.

mm							RRP						
							pcs.	Order-No.	€	Order-No.	€	Order-No.	€
							1	9907-035 000					

Brushtechology Industrial

Internal finishing




HELITUF®

crimped Osborn wire

USAGE		TRIM AND MATERIAL									
		<input type="checkbox"/> NHA 800 (NHS 800) <input type="checkbox"/> Nylon-Dam. 400-600 <input type="checkbox"/> Dring. Drah. Wire 0,08-0,20 <input type="checkbox"/> Abrasive bristle 80-320 <input type="checkbox"/> Nylon/WF 020-320 <input type="checkbox"/> Dring. steckweise 0,05-1,50 <input checked="" type="checkbox"/> Nylon/Inox									
Internal cleaning Deburring Brush edges/tapered grooves Derust Thread/drill hole cleaning Plateau finish		Products available with: Steel wire crimped → <input checked="" type="checkbox"/> Steel <input checked="" type="checkbox"/> Cast steel <input checked="" type="checkbox"/> Stainless steel <input checked="" type="checkbox"/> Non-ferrous metal <input checked="" type="checkbox"/> Aluminium <input checked="" type="checkbox"/> Soft wood <input checked="" type="checkbox"/> Hard wood Stainless steel → <input checked="" type="checkbox"/> Steel <input checked="" type="checkbox"/> Cast steel <input checked="" type="checkbox"/> Stainless steel <input checked="" type="checkbox"/> Non-ferrous metal <input checked="" type="checkbox"/> Aluminium <input checked="" type="checkbox"/> Soft wood <input checked="" type="checkbox"/> Hard wood									


Double wire core for automatic or manual applications. Adapter available to extend length up to max. 225 mm (details below).



W = workpiece diameter

mm							Osborn 0,13		RRP	Osborn 0,20		RRP
W	Ø	A	L	S	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
6	7,95	25	89	3,4	12	9907-036 012						
8	9,5	25	89	3,4	12	9907-036 017						
10	11	25	89	3,4	12	9907-036 022		9907-036 023				
11	12,7	25	89	3,4	12	9907-036 027						
13	14,3	25	89	3,4	12	9907-036 032		9907-036 033				
14	15,9	25	89	3,4	12	9907-036 037						
16	17,5	25	89	3,4	12	9907-036 042		9907-036 043				
18	19	25	89	3,4	12	9907-036 047						
19	20,6	25	89	3,4	12	9907-036 052		9907-036 053				
21	22,2	25	89	3,4	12	9907-036 057						
22	23,8	25	89	3,4	12	9907-036 062		9907-036 063				
24	25,4	25	89	3,4	12	9907-036 067						
25	27	25	89	3,4	12	9907-036 072		9907-036 073				
29	30,1	25	89	3,4	12	9907-036 082						
32	33,3	25	89	3,4	12		9907-036 093					

mm							Osborn 0,13		RRP	Osborn 0,20		RRP
W	Ø	A	L	S	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	
6	7,95	25	89	3,4	12	9907-036 139						
10	11,1	25	89	3,4	12	9907-036 147						
11	12,7	25	89	3,4	12	9907-036 151						
13	14,3	25	89	3,4	12	9907-036 155		9907-036 156				
16	17,5	25	89	3,4	12	9907-036 163		9907-036 164				
19	20,6	25	89	3,4	12		9907-036 179		9907-036 172			
22	23,8	25	89	3,4	12			9907-036 188				
24	27	25	89	3,4	12				9907-036 187			
25	27	25	89	3,4	12					9907-036 204		
32	33,3	25	89	3,4	12							

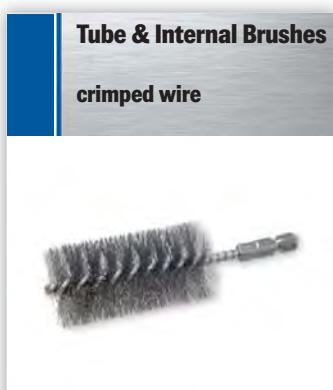

Tube & Internal Brushes

crimped wire

mm							Osborn 0,13		RRP	Osborn 0,20		RRP
Ø	A	L	G	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€
10	100	140	M 6	10	0003-815 210							
12	100	140	M 6	10	0002-815 212							
14	100	140	M 6	10	0002-815 214							
15	100	140	5/16 Zoll	10	0002-812 215							
18	100	140	5/16 Zoll	5		0002-812 218						
20	100	140	5/16 Zoll	10		0002-812 220						




mm							0,15		RRP	0,20		RRP
Ø	A	L	G	pcs.	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€
25	100	160	1/2 Zoll	5	0002-808 125							
30	100	160	1/2 Zoll	5	0002-808 130							
32	100	160	1/2 Zoll	5	0002-808 132							
35	100	160	1/2 Zoll	5	0002-808 135							
36	100	160	1/2 Zoll	5	0002-808 136							
38	100	160	1/2 Zoll	5	0002-808 138							
40	100	160	1/2 Zoll	5	0002-808 140							
44	100	160	1/2 Zoll	5	0002-808 144							
50	100	160	1/2 Zoll	5	0002-808 150							



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushtechnology Industrial

Internal finishing

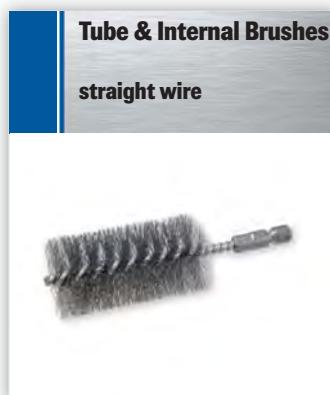

USAGE		TRIM AND MATERIAL								
		Products available with: Steel wire crimped → <table border="1" style="margin-left: 20px;"> <tr><td>Steel</td><td>Cast steel</td><td>Sainless steel</td><td>Non/ferrous metal</td><td>Aluminum</td><td>Soft wood</td><td>Hard wood</td></tr> </table>		Steel	Cast steel	Sainless steel	Non/ferrous metal	Aluminum	Soft wood	Hard wood
Steel	Cast steel	Sainless steel	Non/ferrous metal	Aluminum	Soft wood	Hard wood				
Internal cleaning Brush edges/tapered grooves Deburring Derust Thread/drill hole cleaning Plateau finish		Nylon/Steel/NBS 1000 Nylon/Steel 400-900 Nylon/Steel 0,08-0,20 Nylon/Steel/Brass 0,08-0,20 Nylon/WF 0,05-0,20 Nylon/Steel 0,05-0,50 Nylon/Steel								



Ø	A	L	G	mm	pcs.	0,25	RRP	0,30	RRP	0,35	RRP
						Order-No.	€	Order-No.	€	Order-No.	€
25	100	160	1/2 Zoll BSW	5	5	0003-810 125					
28	100	160	1/2 Zoll BSW	5	5	0003-810 128					
30	100	160	1/2 Zoll BSW	5	5	0003-810 130					
32	100	160	1/2 Zoll BSW	5	5			0003-810 132			
38	100	160	1/2 Zoll BSW	5	5			0003-810 138			
40	100	160	1/2 Zoll BSW	5	5			0003-810 140			
44	100	160	1/2 Zoll BSW	5	5			0003-810 144			
50	100	160	1/2 Zoll BSW	5	5			0003-810 150			
57	100	160	1/2 Zoll BSW	5	5			0003-810 157			
63	100	160	1/2 Zoll BSW	5	5					0002-808 163	
75	100	160	1/2 Zoll BSW	5	5					0002-808 175	

Ø	A	L	G	mm	pcs.	0,40	RRP	0,50	RRP	Order-No.	€ €
						Order-No.	€	Order-No.	€		
63	100	160	1/2 Zoll BSW	5	5	0003-810 163					
69	100	160	1/2 Zoll BSW	5	5	0003-810 169					
75	100	160	1/2 Zoll BSW	5	5	0003-810 175					
82	100	160	1/2 Zoll BSW	5	5	0003-810 182				0002-808 100	
100	100	160	1/2 Zoll BSW	5	5			0003-810 100			
101	100	160	1/2 Zoll BSW	5	5						



G	L	pcs.	steel wire	RRP	RRP			
			Order-No.	€	Order-No.	€	Order-No.	€
1/2 Zoll BSW	1000	10	0002-819 110					
M 6	1000	10	1132-819 110					
5/16 Zoll BSW	1000	10	1103-819 110					

Flexible – with a thread to extend heating element brushes and tube brushes.

Brushtechology Industrial


Internal finishing

Tube & Internal Brushes

abrasive trim



Zinc-plated twisted shaft with single trim spiral. For cross-hole deburring, control units, O-ring grooves and cylindrical components.



USAGE



	NHS 1000	RRP	NHA 600	RRP
Ø	Order-No.	€	Order-No.	€
0,7	0003-056 400			
1,2	0003-056 403			
1,9	0003-056 406			
2,2	0003-056 409			
2,6	0003-056 412			
3,2	0003-056 415			
3,5	0003-056 418			
4,2		0003-056 425		
4,8		0003-056 427		
5,5		0003-056 428		
6,6		0003-056 429		
8,2		0003-056 432		
9,8		0003-056 435		
11,5		0003-056 436		
13		0003-056 438		
16		0003-056 441		
17,5		0003-056 442		
19,4		0003-056 444		
22,6		0003-056 447		
25,8		0003-056 450		

TRIM AND MATERIAL

Products available with:
Abrasive bristle



Tube & Internal Brushes

abrasive filament



Deburring cross-holes, control parts, O-Ring grooves and cylindrical bores. Recommendation: Brushes should be 10–15% larger than the bore.



USAGE



	Novofil 80	RRP	Novofil 120	RRP	Novofil 320	RRP
Ø	Order-No.	€	Order-No.	€	Order-No.	€
6		0003-056 306			0003-056 326	
7		0003-056 307			0003-056 327	
8		0003-056 308			0003-056 328	
10	0003-056 010		0003-056 310		0003-056 330	
13	0002-056 011		0002-056 311		0002-056 331	
16	0002-056 012		0002-056 312		0002-056 332	
19	0002-056 013		0002-056 313		0002-056 333	
22	0002-056 014		0002-056 314		0002-056 334	
25	0002-056 015		0002-056 315		0002-056 335	
32	0002-056 016		0002-056 316		0002-056 336	
38	0002-056 017		0002-056 317		0002-056 337	
50	0002-056 018		0002-056 318		0002-056 338	


TRIM AND MATERIAL

Products available with:
Abrasive bristle



Brushtechnology Industrial

Internal finishing

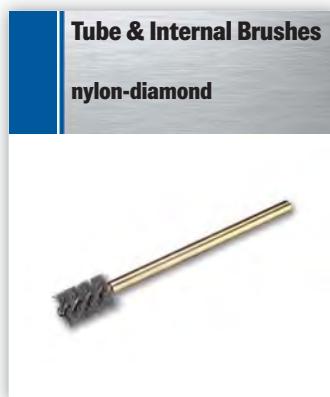

USAGE

Internal cleaning	<input type="checkbox"/>	Nylon Diamond 1000
Deburring	<input checked="" type="checkbox"/>	Diamond Deb. 400-800
Brush edges/tapered grooves	<input checked="" type="checkbox"/>	Aluminium/Brass 80-320
Derust	<input checked="" type="checkbox"/>	Neoprene/WF 100-320
Thread/drill hole cleaning	<input checked="" type="checkbox"/>	Drop. stainless 0.05-0.50
Plateau finish	<input checked="" type="checkbox"/>	Nylon Natural

TRIM AND MATERIAL

Products available with:

Nylon-Diamond



W	A	L	S	pcs.	mm	grit 400	RRP	grit 800	RRP	mm	grit 400	RRP	grit 800	RRP	
						Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	€
2	20	100	1	2	0008-852 002 *			0008-852 802							
2	20	100	1	10	0018-852 002 *			0018-852 802							
2,5	20	100	1	2	0008-852 003 *			0008-852 803							
2,5	20	100	1	10	0018-852 003 *			0018-852 803							
3	20	100	1,5	2	0008-852 004			0008-852 804							
3	20	100	1,5	10	0008-852 005			0008-852 805							
3,5	20	100	1,5	2	0008-852 006			0008-852 806							
3,5	20	100	1,5	10	0008-852 007			0008-852 807							
4	20	115	3	2	0008-852 008			0008-852 808							
5	20	115	3	2	0008-852 009			0008-852 809							
6	20	115	3	2	0008-852 010			0008-852 810							
7	20	115	3	2	0008-852 012			0008-852 812							
8	20	115	3	2	0008-852 015			0008-852 815							
9	20	115	3	2	0008-852 017			0008-852 817							
10	20	115	4	2	0008-852 019			0008-852 819							
12	20	115	6	2	0008-852 022			0008-852 822							
15	20	115	6	2	0008-852 025			0008-852 825							
17	20	115	6	10											
17	20	115	6	2											
19	20	115	6	10											
19	20	115	6	2											
22	20	115	6	10											
22	20	115	6	2											
25	20	115	6	2											
25	20	115	6	10											

* without brass stabilising sleeve.



W	Ø	A	L	S	pcs.	mm	grit SIC 120	RRP	grit SIC 180	RRP	grit SIC 240	RRP
							Order-No.	€	Order-No.	€	Order-No.	€
7	8	50	200	3,6	1	9818-036 308						
8	9	50	200	3,6	1	9818-036 309						
9	10	50	200	3,6	1	9818-036 310						
10	11	60	200	3,6	1	9818-036 311						
11	12	60	200	3,6	1	9818-036 312						
12	13	60	200	3,6	1	9818-036 313						
14	15,5	60	200	3,6	1	9818-036 316						
16	18	60	200	4,6	1	9818-036 318						
18	20	60	200	4,6	1	9818-036 320						
20	22	70	200	4,6	1	9818-036 322						
22	25	70	200	4,6	1	9818-036 325						
24	27	70	200	5,1	1	9818-036 327						
25	28	70	200	5,1	1	9818-036 328						
27	30	70	200	5,1	1	9818-036 330						
29	32	70	200	5,1	1	9818-036 332						
32	35	70	200	5,7	1	9818-036 335						
35	38	70	200	5,7	1	9818-036 338						
38	41	70	200	5,7	1	9818-036 341						
41	45	70	200	5,7	1	9818-036 345						
45	48	70	200	5,7	1	9818-036 348						
48	51	76	203	6,5	1	9818-036 351						
51	54	70	200	6,5	1	9818-036 354						
54	57	70	200	6,5	1	9818-036 357						
57	60	70	200	7,3	1	9818-036 360						
60	64	70	200	7,3	1	9818-036 364						

W = workpiece diameter



Brushtechology Industrial

Internal finishing



Oscillationg use at approx. 600–1400 rpm.
Version with very dense trim.




USAGE		TRIM AND MATERIAL									
		Products available with:									
		Abrasive bristle									
Nylon 800 (NHS 800)	<input type="checkbox"/>	Steel									
Nylon Alum. 400-800	<input type="checkbox"/>	Cast steel									
Aluminum bristles 80-320	<input type="checkbox"/>	Stainless steel									
Nylon/WF 020-320	<input checked="" type="checkbox"/>	Non-ferrous metal									
Duro. stainless 025-150	<input type="checkbox"/>	Aluminum									
Nylon/Alum.	<input type="checkbox"/>	Salt/wood									

Ø	A	L	S	pes.	Order-No.	grit	RRP	grit	RRP	grit	RRP
						120	€	320	€	320	€
19	22	90	3,18	6	9907-036 478						
26	23	86	3,18	12	9907-036 302			9907-036 303			
26	32	86	3,18	12							
29	38	96	3,18	6	9907-036 482			9907-036 483			
29	50	125	6,35	12							
35	50	125	6,35	2	9907-036 484						
38	50	125	6,35	2	9907-036 304			9907-036 305			
42	50	125	6,35	2	9907-036 491						
42	50	125	6,35	1				9907-036 490			
46	50	125	6,35	2	9907-036 489			9907-036 488			
46	50	125	6,35	1							
51	50	125	6,35	12	9907-036 306			9907-036 307			
51	50	125	6,35	1				9907-036 487			
56	50	125	6,35	2	9907-036 486						
63	89	160	9,53	2	9907-036 308			9907-036 309			
76	102	160	9,53	2	9907-036 310			9907-036 311			
89	102	160	9,53	2	9907-036 312						
89	102	160	9,53	12				9907-036 313			
102	102	160	9,53	2	9907-036 314			9907-036 315			
115	102	152	9,53	2	9907-036 316			9907-036 317			
115	102	152	9,53	6							
127	127	230	12,7	2	9907-036 318			9907-036 319			
127	127	230	12,7	6							
140	127	235	12,7	2	9907-036 320			9907-036 321			
140	127	235	12,7	6							
153	153	230	12,7	2	9907-036 322						
153	153	230	12,7	1				9907-036 323			



Ø	A	L	pes.	Order-No.	0,15	RRP	0,20	RRP	0,20	RRP
					Order-No.	€	Order-No.	€	Order-No.	€
15	100	280	10	0002-892 215						
20	100	280	10		0002-892 220					
25	100	280	10		0002-892 225					

To clean the inside of steel, wood or plastic products. To remove chippings and loose particles.




Brushtechnology Industrial

Internal finishing




Double wire cable and loop.

Ø	A	L	pcs.		steel wire crimped		RRP	brass crimped		RRP	stainless crimped		RRP
					Order-No.	€		Order-No.	€		Order-No.	€	
4	100	300	20					0003-816 504			0003-816 304		
4	100	320	20	0003-816 204							0003-816 505		0003-816 305
5	100	300	20					0003-816 205					
5	100	320	20	0003-816 206				0003-816 506			0003-816 306		0003-816 308
6	100	320	20					0003-816 208			0003-816 508		
8	100	300	20					0003-816 210			0003-816 510		
10	100	300	20					0003-816 212					
10	100	320	20					0003-816 512			0003-816 310		0003-816 312
12	100	300	20					0002-816 215			0002-816 515		0002-816 315
12	100	320	20					0002-816 218			0002-816 518		0002-816 318
15	100	300	20					0002-816 220			0002-816 520		0002-816 320
18	100	300	20					0002-816 225			0002-816 525		0002-816 325
20	100	300	20										
25	100	300	20										




Ø	A	L	pcs.		nylon		RRP					
					Order-No.	€	Order-No.	€	Order-No.	€	Order-No.	
4	100	300	20	0003-816 804								
5	100	300	20	0003-816 805								
6	100	300	20	0003-816 806								
8	100	300	20	0003-816 808								
10	100	300	20	0003-816 810								
12	100	300	20	0003-816 812								
15	100	300	20	0003-816 815								
18	100	300	20	0003-816 818								
20	100	300	20	0003-816 820								
25	100	300	20	0003-816 825								

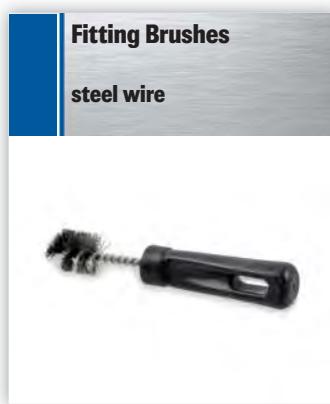

To clean the inside of tubes and solder fittings made of copper or red brass.

Ø	A	L	pcs.		0,20 steel wire		RRP				
					Order-No.	€	Order-No.	€	Order-No.	€	
13	25	160	12	0003-075 252							
16	25	160	12	0003-075 253							
19	28	160	12	0003-075 254							
23	25	160	12	0003-075 255							



Brushtechology Industrial

Internal finishing

Battery Terminal Brush
steel wire



To clean batteries (pole and clamp cleaning).




mm				steel wire crimped	RRP				
Ø	T	L	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
15 / 25	65	120	12	0008-493 100					

Stove Pipe Cleaners
crimped wire



With a flexible, galvanised wire handle.

mm				0,30 crimped	RRP				
Ø	A	L	pcs.	Order-No.	€	Order-No.	€	Order-No.	€
125	120	2000	10	0002-824 213					
125	120	3000	10	0002-825 213					
140	120	3000	10	0002-825 214					
160	120	3000	10	0002-825 216					



Brushtechology Industrial

Internal finishing



Brushtechology Industrial
ATB® – Advanced Technology Brush System



BRUSHTECHNOLOGY
INDUSTRIAL

PRODUCT INTRODUCTION

ATB®

Extremely long life

- Lower piece cost for the deburring process
- High safety
- Reduced set-up costs and down times

Flexible long life

- Dimensionally stable, also with longer trim lengths and high rotational speeds

High-tech filaments

- High density of abrasive grit for powerful deburring
- Can be used with coolants

Extremely high fill density with even surface



Shorter operating times and very even edge blending.
Particularly suitable for deburring of:

- machined surfaces
- sintered products
- stampings and mouldings
- diecasted parts
- cylinder heads
- motor units
- hydraulic parts
- pneumatic parts

of different geometries and materials

Extremely high fill density

The new ATB disc brushes have fill density which is 4 times higher than other disc brushes manufactured according to the conventional method (punched)! By this the brush life is increased many times over, with quicker processing times and better and more efficient results at the same time.

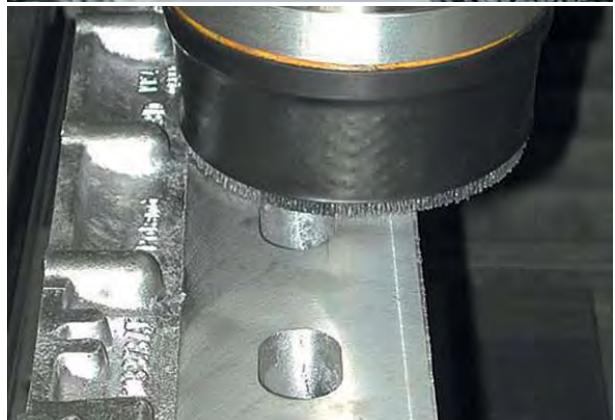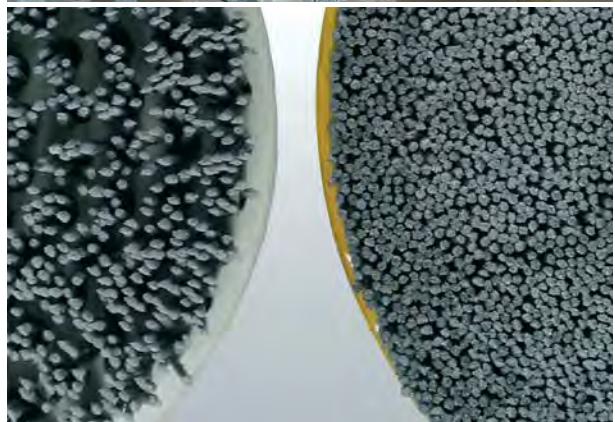

Brushtechology Industrial

ATB® – Advanced Technology Brush System

ATB brush with maximum fill density compatible with clamping fixture




For deburring applications of components with various materials just as e.g. steel, aluminum and cast iron.

mm			INDEX	à	grit 80	grit 120
Total Ø	Trim length T	Bore diameter	for clamping fixture		Order-No.	Order-No.
50	35	16 Hexagonal	K = fixture with shank	1	6701-604 912	5411-604 912
76	35	16 Hexagonal	L = fixture with shank	1	3111-604 913	9841-604 913
85	35	16 Hexagonal	J = fixture with shank	1	6201-604 914	1601-604 914
106	35	16 Hexagonal	H = fixture with shank	1	3101-604 914	3221-604 914

mm			INDEX	à	grit 180	grit 320
Total Ø	Trim length T	Bore diameter	for clamping fixture		Order-No.	Order-No.
50	35	16 Hexagonal	K = fixture with shank	1	5431-604 912	5441-604 912
76	35	16 Hexagonal	L = fixture with shank	1	3311-604 913	3151-604 913
85	35	16 Hexagonal	J = fixture with shank	1	2211-604 914	6231-604 914
106	35	16 Hexagonal	H = fixture with shank	1	3321-604 914	3401-604 914

Price on request.



ATB brush with max. fill density for tool holders



For deburring applications of sealing and contact surfaces as well as functional areas for a wide range of components.

Use on stationary machines with cooling lubricant, water or oil is recommended.

mm			INDEX	à	grit 80	grit 120
Total Ø	Trim length T	Bore diameter	for clamping fixture	pcs.	Order-No.	Order-No.
125	40	18 + Driv.hole	C = fixture for HSK/SK	1	3101-604 916	3201-604 916
150	40	18 + Driv.hole	D = fixture for HSK/SK	1	3111-604 916	3211-604 916
175	40	18 + Driv.hole	E = fixture for HSK/SK	1	3131-604 916	3231-604 916
200	40	18 + Driv.hole	F = fixture for HSK/SK	1	8411-604 918	4021-604 918
250	38	18 + Driv.hole	G = fixture for HSK/SK	1	6511-604 919	6171-604 916

mm			INDEX	à	grit 180	grit 320
Total Ø	Trim length T	Bore diameter	for clamping fixture	pcs.	Order-No.	Order-No.
125	40	18 + Driv.hole	C = fixture for HSK/SK	1	3311-604 916	3401-604 916
150	40	18 + Driv.hole	D = fixture for HSK/SK	1	4341-604 916	3411-604 916
175	40	18 + Driv.hole	E = fixture for HSK/SK	1	3341-604 916	3431-604 916
200	40	18 + Driv.hole	F = fixture for HSK/SK	1	5901-604 918	
250	38	18 + Driv.hole	G = fixture for HSK/SK	1	2401-604 919	


Price on request.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushtechnology Industrial

ATB® – Advanced Technology Brush System

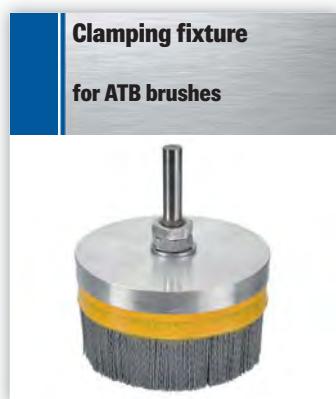

ATB brush with fixed clamping fixture.

For ATB brushes with diameter:

clamping fixture with shank Ø 12 mm and clamping DIN 6535 HB	pcs.	INDEX K Ø 50 mm Order-No.	INDEX L Ø 76 mm Order-No.	INDEX J Ø 85 mm Order-No.	INDEX H Ø 106 mm Order-No.
	1	5002-075 000	3642-075 000	9602-075 000	3652-075 000

clamping fixture for inclusion on clamping cones HSK/SK	pcs.	INDEX C Ø 125 mm Order-No.	INDEX D Ø 150 mm Order-No.	INDEX E Ø 175 mm Order-No.	INDEX F Ø 200 mm Order-No.	INDEX G Ø 250 mm Order-No.
	1	3602-075 000	3612-075 000	3622-075 000	3692-075 000	1922-075 000

Price on request.



ATB-brush with assembled HSK-cone.

Tool Holders	for INDEX	pcs.	Order-No.
HSK – A63, DIN 69893A	C, D, E, F, G	1	3603-604 000
HSK – A100, DIN 69893A	C, D, E, F, G	1	3633-604 000
SK – 40, DIN 69871	C, D, E, F, G	1	3613-604 000
Weldon surface with shank Ø 12 mm, HSK – 63 DIN 69893A	H, J, K, L	1	4933-604 000
Weldon surface with shank Ø 12 mm, HSK – 100 DIN 69893A	H, J, K, L	1	6303-604 000

Price on request.

Brushtechology Industrial

ATB® – Advanced Technology Brush System



For deburring applications of sealing and contact surfaces as well as functional areas for a wide range of components. Use on stationary machines with cooling lubricant, water or oil is recommended. For direct mounting on shell mill holders without need of additional clamping sets / systems.

mm			INDEX		grit 80	grit 120
Brush Ø	Trim length T	Bore diameter	for fixture	pcs.	Order-No.	Order-No.
50	35	Ø 16 +keyways	Direct to shell mill holder	1	6601-604 912	6501-604 912
76	35	Ø 16 +keyways	Direct to shell mill holder	1	6301-604 913	6311-604 913
76	35	Ø 22 +keyways	Direct to shell mill holder	1	5521-604 913	5511-604 913
106	35	Ø 16 +keyways	Direct to shell mill holder	1	5431-604 914	5511-604 914
106	35	Ø 22 +keyways	Direct to shell mill holder	1	5501-604 914	5791-604 914
106	35	Ø 27 +keyways	Direct to shell mill holder	1	5601-604 914	5611-604 914
125	35	Ø 16 +keyways	Direct to shell mill holder	1	6751-604 916	6801-604 916
125	35	Ø 22 +keyways	Direct to shell mill holder	1	6721-604 916	6821-604 916
125	35	Ø 27 +keyways	Direct to shell mill holder	1	6761-604 916	6811-604 916
150	35	Ø 22 +keyways	Direct to shell mill holder	1	6771-604 916	6841-604 916
150	35	Ø 27 +keyways	Direct to shell mill holder	1	6781-604 916	6831-604 916

mm			INDEX		grit 180
Brush Ø	Trim length T	Bore diameter	for fixture	pcs.	Order-No.
50	35	Ø 16 +keyways	Direct to shell mill holder	1	6401-604 912
76	35	Ø 16 +keyways	Direct to shell mill holder	1	6321-604 913
76	35	Ø 22 +keyways	Direct to shell mill holder	1	5501-604 913
106	35	Ø 16 +keyways	Direct to shell mill holder	1	5441-604 914
106	35	Ø 22 +keyways	Direct to shell mill holder	1	5521-604 914
106	35	Ø 27 +keyways	Direct to shell mill holder	1	5621-604 914
125	35	Ø 16 +keyways	Direct to shell mill holder	1	6631-604 916
125	35	Ø 22 +keyways	Direct to shell mill holder	1	6621-604 916
125	35	Ø 27 +keyways	Direct to shell mill holder	1	6641-604 916
150	35	Ø 22 +keyways	Direct to shell mill holder	1	6651-604 916
150	35	Ø 27 +keyways	Direct to shell mill holder	1	6661-604 916

Price on request.



Brushes for continuous deburring lines with planetary heads. Application: flat parts produced and deburred in punching, lasered, fine blanking or forming technology.

The Turbo-style sections of filaments can be angled to the right or to the left in a defined angle. Depending on the direction of rotation, the deburring will be more aggressive and effective or the brush is reaching a surface finish only.

mm			INDEX		grit 80	grit 120
Brush Ø	Trim length T	Bore diameter	material direction	pcs.	Order-No.	Order-No.
150	25	Ø 25/35 + 2 driv.holes	Turbo style-neutral	1	3141-604 916	3241-604 916
150	25	Ø 25/35 + 2 driv.holes	Turbo style-right	1	3181-604 916	3281-604 916
150	25	Ø 25/35 + 2 driv.holes	Turbo style-left	1	3161-604 916	3261-604 916

mm			INDEX		grit 180	grit 320
Brush Ø	Trim length T	Bore diameter	material direction	pcs.	Order-No.	Order-No.
150	25	Ø 25/35 + 2 driv.holes	Turbo style-neutral	1	3351-604 916	3441-604 916
150	25	Ø 25/35 + 2 driv.holes	Turbo style-right	1	3391-604 916	3481-604 916
150	25	Ø 25/35 + 2 driv.holes	Turbo style-left	1	3371-604 916	3461-604 916

Price on request.



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Brushtechnology Industrial

Novotec

Novotec wheel brushes with fill material novofil®-DR

Features of these brushes include

a single disc and steel flange. Extremely narrow face widths allow for cutting speeds of approximately 15 m/s (oscillating).

Fill material

Novotec wheel brushes are provided with the hardest abrasive grit available: diamond chips. This ensures not only high performance but also prolonged brush life. On request, we can also supply novofil®-BR (abrasive grit: boron nitride).

Filament

Round filaments

Application range


Ceramics

This brush type is designed for structuring cutting edge geometries of ceramic turnplates as well as deburring wheels.

Hard metal tools

- hard metal drills
- milling cutters
- hard metal turnplates
- circular saws

Cutting edge geometries are shaped by means of a defined cutting edge roundness. This prevents the cutting edge from breaking away during operation at higher cutting speeds and feeds.




Novotec Wheel Brushes		mm	Ø	A	B	rpm	pc.s.	grit 240		RRP	grit 400		RRP	grit 600		RRP
Ø	A							Order-No.	€		Order-No.	€		Order-No.	€	
150	4	20	2800	1	2401-901 924	4001-901 924	6001-901 924									
150	8	20	2800	1	2401-902 924	4001-902 924	6001-902 924									
200	4	20	1400	1	2401-901 926	4001-901 926	6001-901 926									
200	8	20	1400	1	2401-902 926	4001-902 926	6001-902 926									

		mm	Ø	A	B	rpm	pc.s.	grit 800		RRP			Order-No.			Order-No.		
Ø	A							Order-No.	€		Order-No.	€		Order-No.	€		Order-No.	€
150	4	20	2800	1	1201-901 924	6201-902 924	1911-901 926	6901-902 926										
150	8	20	2800	1														
200	4	20	1400	1														
200	8	20	1400	1														

**Load
Runners®**

**Heavy-Duty Idler-Rollers
and load rails for high-capacity load handling**

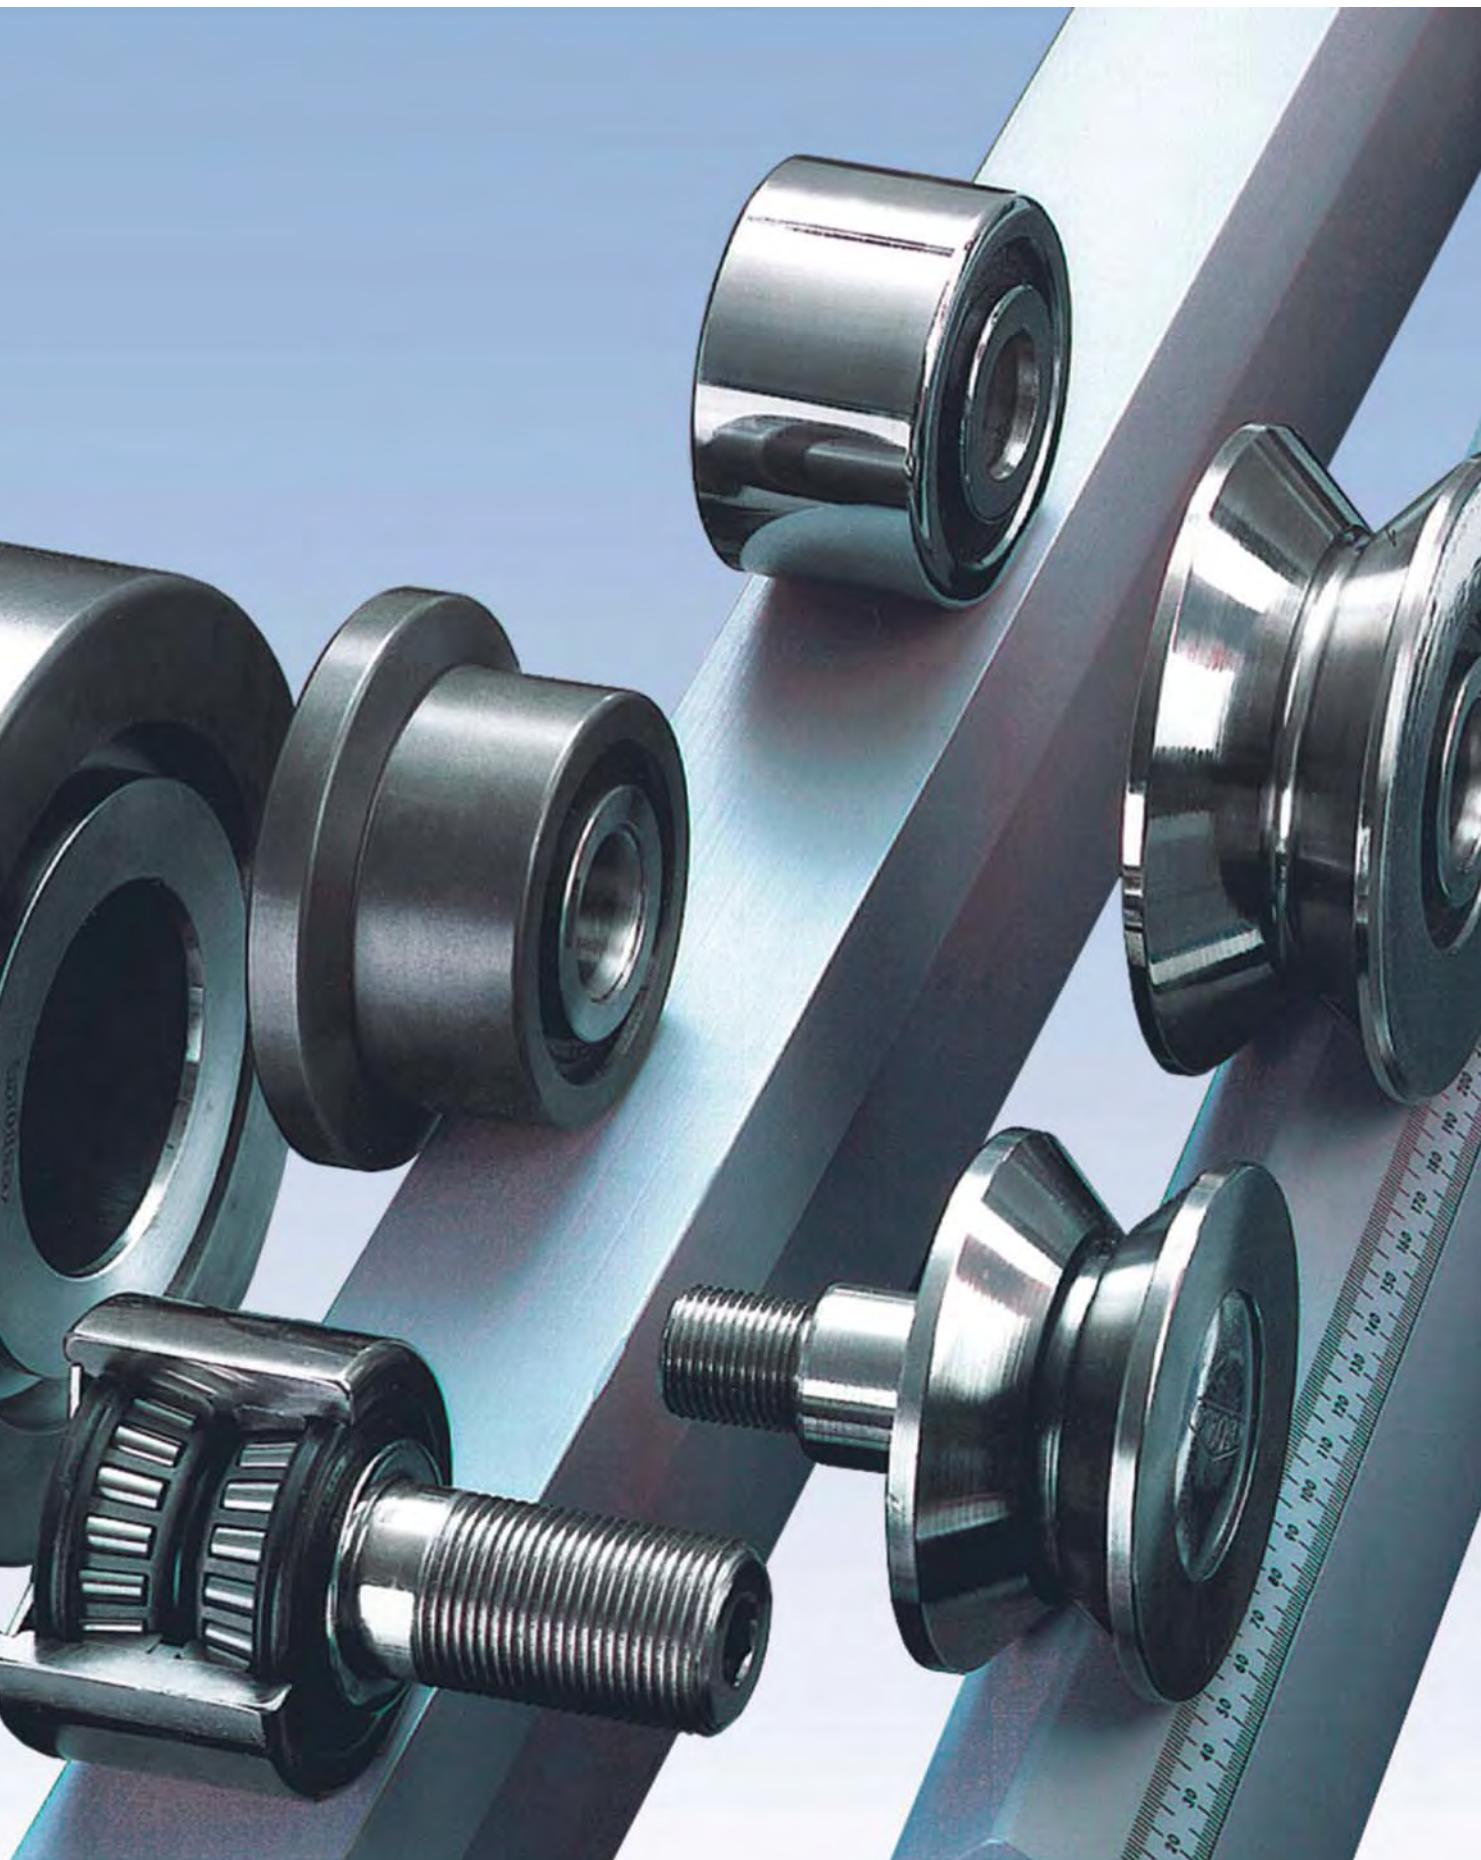

**HEAVY-DUTY
IDLER-ROLLERS**

Heavy-Duty Idler-Rollers

Load Runners®

MORE THAN JUST FINISHING WE KEEP THINGS MOVING

Osborn Load Runners® are the ultimate heavy-duty load rail and idler roller solution in the industry, providing precision performance across numerous applications. Load Runners® help reduce your design time and lower overall material handling system costs.



Load Runners® Load Guidance Systems for Precision Handling of Heavy Loads in Tough Environments

When reliability is paramount, combine the high capacity of Load Runners® idler-rollers with long-lasting, rugged Load Rails®, to move your products, people, or process from Point A to Point B.

Load Runners® feature heat-treated specialty steel, precision bearings, a maintenance-free lubrication and seal system, and a global network of sales support and application engineering expertise.

Often the "unsung hero" in the application, idler rollers play a significant role in the overall success of any rail-riding operation. Properly specified, idler rollers optimize line speed and product handling, regardless of material run or machinery used.



Primary Metals

**Oil & Field
Petrochemical**

**Off-Highway
Equipment:
Agriculture,
Construction &
Mining**

**Food &
Pharmaceutical**

Automotive


**Mining &
Aggregate**

FURTHER INFORMATION

If you are involved with product selection please contact the Osborn team.
Phone: +49 (0) 6451 588-0 Email: info@osborn.de

Product information &
CAD-Download available on
www.loadrunners.de



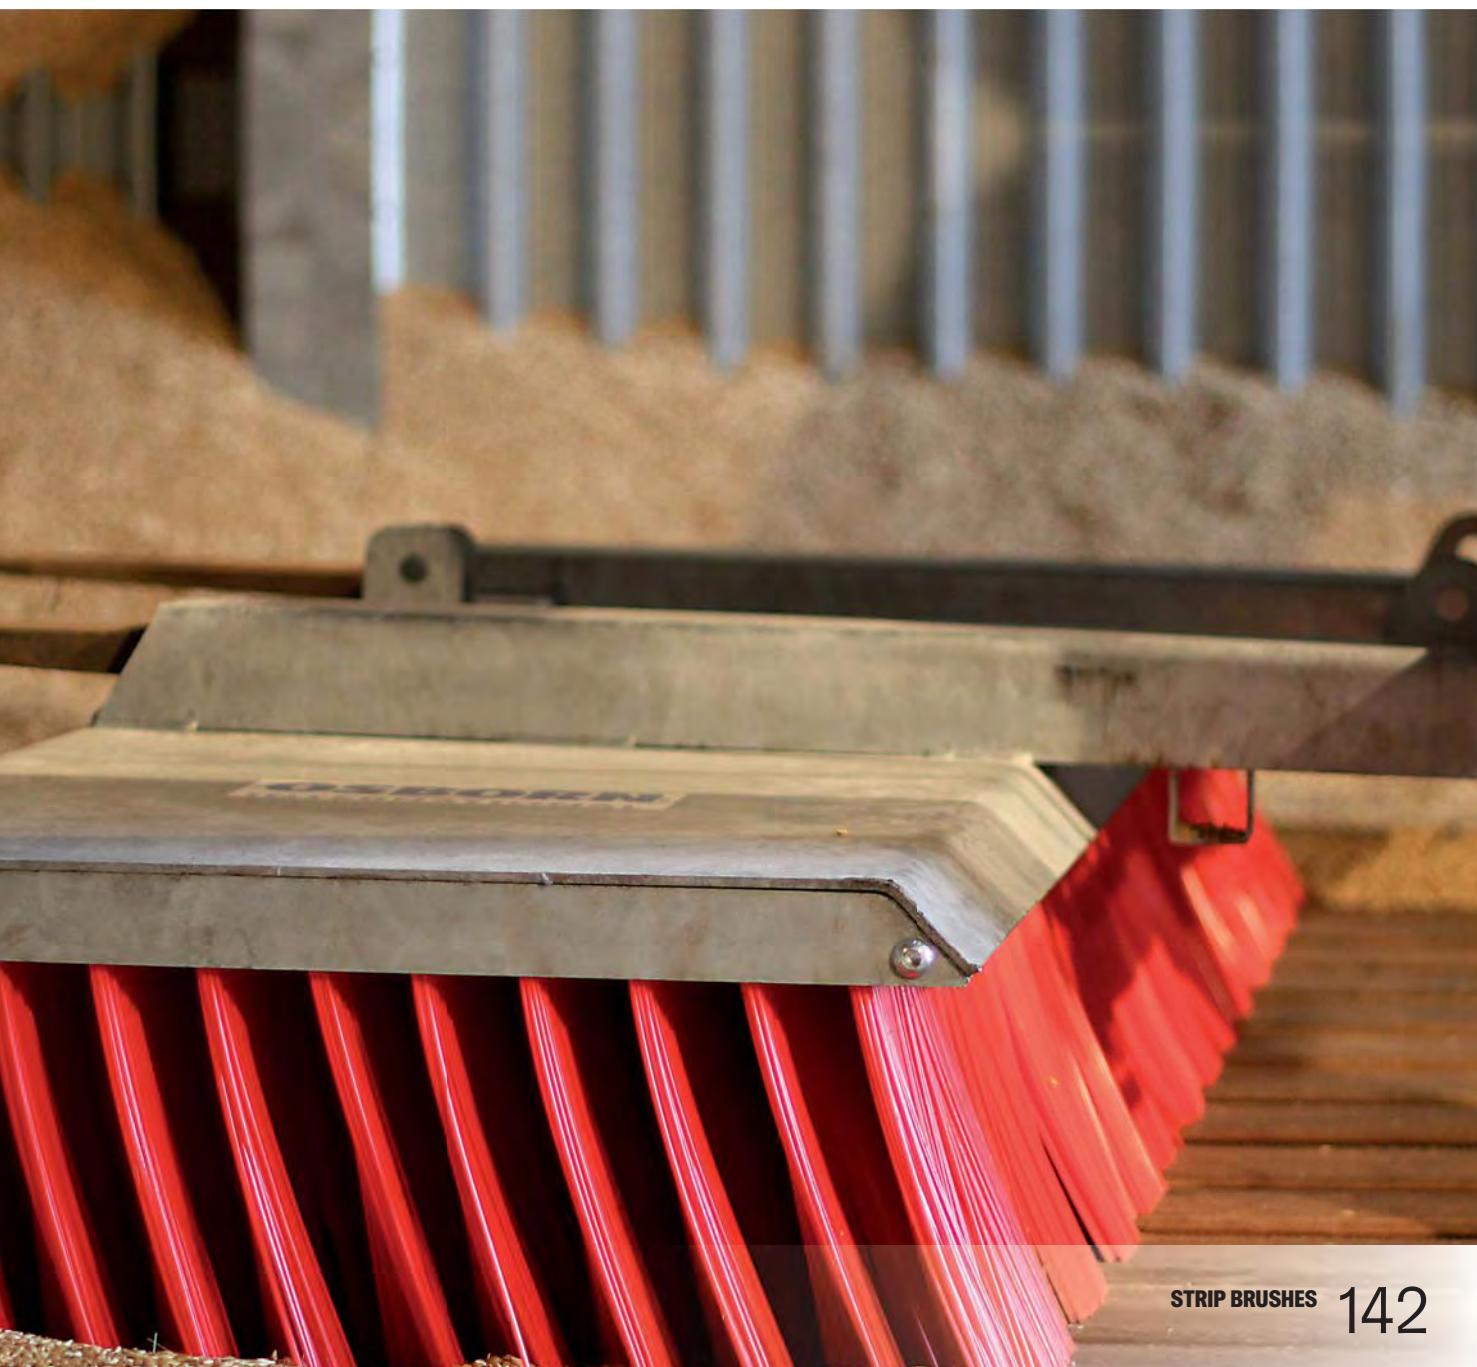

STRIP BRUSHES 142

BROOMATE® 145

Specials

Strip brushes

VERSATILE ALLROUNDER

Strip brushes and aluminum extrusions

Find optimal solutions for your individual application with Osborn strip brushes.

Typical areas of application are e.g.:

- Sealing
- Guiding
- Positioning
- Transporting
- Protecting and shielding
- Skirting and closing of gaps e.g. cable bushing
- Wiping and striping

You can choose between numerous possibilities from our standard range. Our range includes brushes with nylon (PA6) and galvanized backings either as single unit or with aluminum extrusion in H- (180°) or F- (90°) profile. The aluminium extrusions are excellent in regard to optics and stability.



Osborn nylon strip brushes are supplied in standard length of 3000 mm.
Customized solutions or different length can be supplied on request under consideration of our minimum order quantities.

Horse hair filling

In addition our standard range offers strip brushes with high-grade pure horse hair filling. They are an effective sealing for any kind of doors, gates and windows of buildings as they ensure protection against coldness, draught, insects, dust and noise.


A positive side effect is that you will save energy with our durable, UV-resistant and flexible horse hair that ensures an optimal isolation and sealing effect.

Our range offers standard length of 1000 and 2000 mm including our 180° aluminum extrusion ex stock.




Specials

Strip brushes

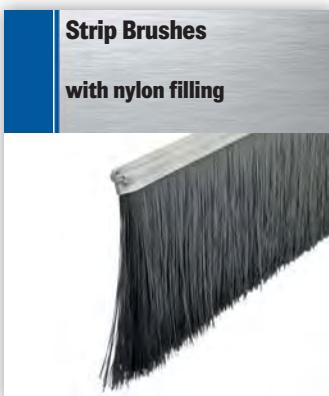



Strip brushes incl. aluminum extrusion
h-profile 180°/F-profile 90° with PA6
straight, black for innovative brush-based
solutions in various industrial applications.



Aluminum Extrusion
F-profile 90°



Aluminum Extrusion
h-profile 180°



Strip brushes type A:

	mm	mm	mm	mm	mm	RRP
OAT	L	W	H	PA6 Ø	Order-No.	€/m
15	3000	2,5	2,7	0,15	0904-905 822	

Aluminium extrusion type A:

	mm	mm	mm	RRP	
Profile	TH	PW	PH	Order-No.	€/m
180°	13,5	4,4	4	0114-906 000	
90°	14	5,2	5,7	0214-906 000	

Strip brushes type B:

	mm	mm	mm	mm	mm	RRP
OAT	L	W	H	PA6 Ø	Order-No.	€/m
19	3000	4	3,7	0,15	0924-905 822	
45	3000	4	3,7	0,15	0904-905 825	

Aluminium extrusion type B:

	mm	mm	mm	RRP	
Profile	TH	PW	PH	Order-No.	€/m
180°	15	7,3	7	0124-906 000	
90°	16	7,3	7	0224-906 000	

Strip brushes type E:

	mm	mm	mm	mm	mm	RRP
OAT	L	W	H	PA6 Ø	Order-No.	€/m
25	3000	5,1	6,3	0,20	0924-905 823	
32	3000	5,1	6,3	0,20	0904-905 824	
45	3000	5,1	6,3	0,20	0914-905 825	

Aluminium extrusion type E:

	mm	mm	mm	RRP	
Profile	TH	PW	PH	Order-No.	€/m
180°	27	8,2	10	0144-906 000	
90°	27	9	10	0244-906 000	

Strip brushes type K:

	mm	mm	mm	mm	mm	RRP
OAT	L	W	H	PA6 Ø	Order-No.	€/m
50	3000	6,6	7,5	0,20	0924-905 825	
75	3000	6,6	7,5	0,30	0904-905 837	

Aluminium extrusion type K:

	mm	mm	mm	RRP	
Profile	TH	PW	PH	Order-No.	€/m
180°	30	10	12	0154-906 000	
90°	37	12	12	0254-906 000	

Strip brushes type F:

	mm	mm	mm	mm	mm	RRP
OAT	L	W	H	PA6 Ø	Order-No.	€/m
60	3000	7,8	8,7	0,50	0904-905 856	
75	3000	7,8	8,7	0,30	0904-905 847	
115	3000	7,8	8,7	0,50	0904-905 859	
60	3000	7,8	8,7	0,90	0904-905 896	

Aluminium extrusion type F:

	mm	mm	mm	RRP	
Profile	TH	PW	PH	Order-No.	€/m
180°	33	12	13	0164-906 000	
90°	41	13	14	0264-906 000	

Strip brushes type L:

	mm	mm	mm	mm	mm	RRP
OAT	L	W	H	PA6 Ø	Order-No.	€/m
230	3000	11,4	12,5	0,90	0904-905 899	
150	3000	11,4	12,5	0,60	0904-905 869	

Aluminium extrusion type L:

	mm	mm	mm	RRP	
Profile	TH	PW	PH	Order-No.	€/m
180°	68	18	17	0174-906 000	
90°	62	17	18	0274-906 000	

* Available in lengths of 1000, 2000 or 3000 mm

* Customized solutions and special lengths are available on request under consideration of our MOQ



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de


Specials

Strip brushes



Strip Brushes

with horse hair filling



Strip brushes incl. aluminum extrusion h-profile 180° with horse hair filling for an effective sealing of doors, gates and windows.

T mm	L mm	TH mm	pcs.	Order-No.	RRP
					€/piece
15	1000	40	10	0004-906 962	
15	2000	40	10	0034-906 962	
25	1000	50	10	0004-906 963	
25	2000	50	10	0034-906 963	
35	1000	60	10	0004-906 954	
35	2000	60	10	0034-906 954	
45	1000	70	10	0004-906 955	
45	2000	70	10	0034-906 955	

* Backing tape strip brush 5x5 mm, galvanized steel



BROOM FOR FARMING AND INDUSTRIAL

In production facilities, agricultural premises or recycling and waste-management sites there are a lot of areas which need to be kept clean at any time. Osborn has developed a sweeping solution that achieves this result easily, professionally and with low cost. Our broom consists of high quality single strip brushes which are assembled under a solid 5 mm galvanized hood.

The Osborn Broomate® can be attached to a big number of industrial or agricultural vehicles and cleans all sorts of heavy debris, but also liquids.

There are no rotating or electrical parts. Just mount the broom to your vehicle in no time and start sweeping.




The galvanized steel cover that makes it easy to remove the brushes is available in different widths.

Broomate® Model	Minimate	Midimate	Maximate	Megamate	Quad/ Lawnmower
Article number	0004APR120	0004APR180	0004APR240	0004APR300	0014APR12Q
Width (A)	1200 mm	1800 mm	2400 mm	3000 mm	1200 mm
Depth (B)	560 mm	706 mm	706 mm	706 mm	460 mm
Height (C)	540 mm	540 mm	540 mm	540 mm	350 mm
Width forklift-adapter (D)	180 mm (170) WP 210				
Length forklift-adapter (E)	1060 mm	1060 mm	1060 mm	1060 mm	depending on model
Height forklift-adapter (F)	80 mm (75)	80 mm (75)	80 mm (75)	80 mm (75)	
Dimension between forklift-adapter (G)	656 mm	656 mm	656 mm	656 mm	
Steel thickness	5 mm	5 mm	5 mm	5 mm	3 mm
Canopy finishing	galvanized	galvanized	galvanized	galvanized	black lacquer
No. of brush strips	8	11	11	11	7
Weight	95 kg	157 kg	260 kg	337 kg	42 kg
Strip filaments/colour	poly red	poly red	poly red	poly red	poly red
Adapter & options					
Forklift-adapter (170x70) (optional)	•	•	•	•	•
Forklift-adapter wide pocket (210x70)	○	○	○	○	○
Forklift & shovel/loader adapter	○	○	○	○	○
Forklift & skid steer adapter	○	○	○	○	○
Forklift & Euro frame adapter	○	○	○	○	○
Forklift & 3 point adapter	○	○	○	○	○
Storage support legs	•	•	•	•	•
Edge marker kit	○	○	○	○	○
Special adapters	on request	on request	on request	on request	on request
Packaging	•	•	•	•	•
Brush replacement kit					
0004APR034 set of 11 strip brushes (580x285)	–	–	1	2	
0004APR017 set of 8 strip brushes (1200x285)	1	–	–	–	depending on model
0004APR013 set of 11 strip brushes (1820x285)	–	1	1	1	
Weight	20kg	41,25 kg	55 kg	68,75 kg	

● Included ○ Optional

BROOMATE® ADVANTAGES

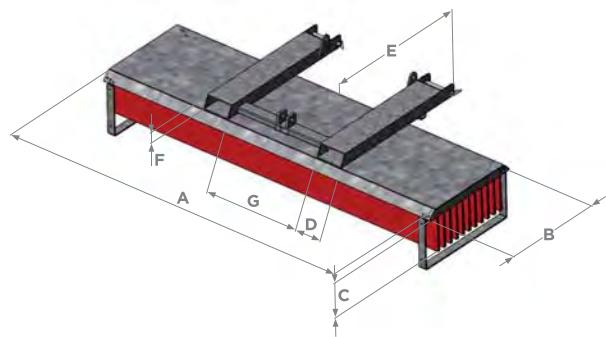

Maintenance free

- Simple and cost effective cleaning solution.
- No hydraulics, no motors, no rotating or electrical parts.
- Easy to clean simply with water or high-pressure washer.

Robust

- 5 mm galvanized steel hood and fork-shoes and protective end-shield.

Versatile

- Excellent cleaning capabilities suitable for heavy debris and dirt like gravel, sand, slurry and light snow, as well as for liquids.
- Bi-directional – sweep forward or in reverse.

Variable Mounting

- Quick and easy mounting on almost any vehicle using optional adapters (extensive range available).

Long service life

- Strip brushes last up to 1000 kilometers.

Environmentally friendly

- All parts can be recycled.
- No need for motor oil, fuel or electric consumption.

Easy replacement


- Strip brushes can be replaced in an instant.
- Simply slide-out and slide-in.

Easy storage

- Supporting frame prevents stripbrushes from bending in storage.

Safety First

- No rotating parts, chains or motors.
- No noise, no dust.

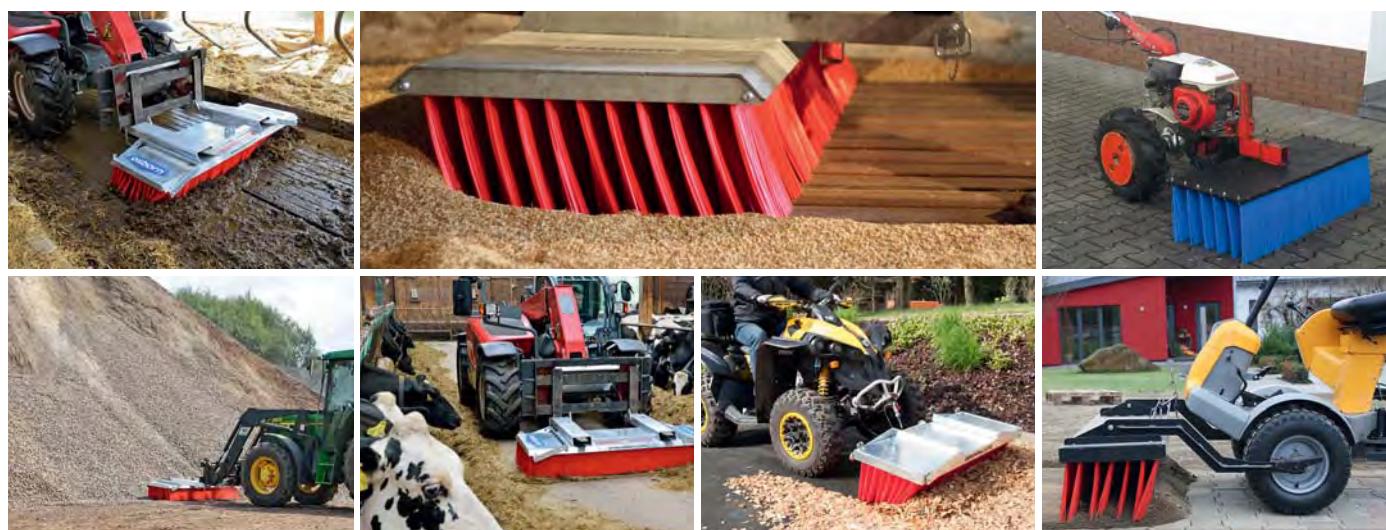

**MORE
INFORMATION**

Scan in QR code and view product video, or download catalogue.



www.broomate.com

Specials

Broomate®



Index

Order-No.	Page	Order-No.	Page	Order-No.	Page	Order-No.	Page	Order-No.	Page
0001-102 006	83	0002-056 316	127	0002-506 132	42, 59	0002-544 361	110	0002-621 151	23
0001-102 016	83	0002-056 317	127	0002-506 141	42, 59	0002-554 141	110	0002-621 351	23
0001-102 095	83	0002-056 318	127	0002-506 142	42, 59	0002-554 161	110	0002-622 131	33
0001-104 924	84	0002-056 331	127	0002-506 161	42, 59	0002-554 341	110	0002-622 151	33
0001-110 114	85	0002-056 332	127	0002-506 332	42, 60	0002-554 361	110	0002-622 331	33
0001-120 097	85	0002-056 333	127	0002-506 341	42, 60	0002-566 141	110	0002-622 351	33
0001-122 096	85	0002-056 334	127	0002-506 342	42, 60	0002-566 161	110	0002-623 131	33
0001-150 592	77	0002-056 335	127	0002-506 343	42, 60	0002-566 361	110	0002-623 151	33
0001-150 593	77	0002-056 336	127	0002-506 361	42, 60	0002-576 141	110	0002-623 331	33
0001-150 594	77	0002-056 337	127	0002-506 362	42, 60	0002-576 145	113	0002-623 351	33
0001-150 595	77	0002-056 338	127	0002-506 363	42, 60	0002-576 161	110	0002-626 061	24
0001-151 132	77	0002-501 132	42, 59	0002-506 542	42, 60	0002-576 195	113	0002-626 251	24
0001-151 133	77	0002-501 142	42, 59	0002-507 142	42, 59	0002-576 341	110	0002-626 305	24
0001-151 134	77	0002-501 143	42, 59	0002-507 162	42, 59	0002-576 345	113	0002-626 311	24
0001-151 135	77	0002-502 132	42, 59	0002-507 342	42, 60	0002-576 361	110	0002-626 505	24
0001-151 332	77	0002-502 141	42, 59	0002-507 362	42, 60	0002-576 395	113	0002-626 650	24
0001-151 333	77	0002-502 142	42, 59	0002-507 542	42, 60	0002-576 906	113	0002-626 651	24
0001-151 334	77	0002-502 143	42, 59	0002-509 142	50, 66	0002-576 916	113	0002-630 304	63
0001-151 335	77	0002-502 332	42, 60	0002-509 143	50, 66	0002-576 926	113	0002-630 305	63
0001-151 392	77	0002-502 333	42, 60	0002-509 144	50, 66	0002-587 161	110	0002-630 310	63
0001-151 393	77	0002-502 341	42, 60	0002-509 162	50, 66	0002-587 162	111	0002-630 311	63
0001-151 394	77	0002-502 342	42, 60	0002-509 163	50, 66	0002-587 341	110	0002-630 316	63
0001-151 395	77	0002-502 343	42, 60	0002-509 164	50, 66	0002-608 131	27	0002-630 317	63
0001-152 022	77	0002-502 542	42, 60	0002-509 165	66	0002-608 133	29	0002-630 328	63
0001-152 023	77	0002-503 132	42, 59	0002-509 167	66	0002-608 134	29	0002-630 334	63
0001-152 024	77	0002-503 142	42, 59	0002-509 192	50, 66	0002-608 135	29	0002-630 335	63
0001-152 025	77	0002-503 143	42, 59	0002-509 193	50, 66	0002-608 151	27	0002-630 340	63
0001-152 132	77	0002-503 331	42, 60	0002-509 194	50, 66	0002-608 153	29	0002-630 341	63
0001-152 133	77	0002-503 332	42, 60	0002-509 342	50, 66	0002-608 154	29	0002-631 131	23
0001-152 134	77	0002-503 333	42, 60	0002-509 343	50, 66	0002-608 155	29	0002-631 151	23
0001-152 135	77	0002-503 341	42, 60	0002-509 344	50, 116	0002-608 183	29	0002-631 331	23
0001-152 332	77	0002-503 342	42, 60	0002-509 348	116	0002-608 184	29	0002-631 351	23
0001-152 333	77	0002-503 343	42, 60	0002-509 362	50, 66	0002-608 185	29	0002-632 131	33
0001-152 334	77	0002-503 542	42, 60	0002-509 363	50, 66	0002-608 331	27	0002-632 151	33
0001-152 335	77	0002-504 132	42, 59	0002-509 364	50, 66	0002-608 333	29	0002-632 331	33
0001-158 522	77	0002-504 141	42, 59	0002-509 448	116	0002-608 334	29	0002-632 351	33
0001-158 523	77	0002-504 142	42, 59	0002-509 478	116	0002-608 351	27	0002-641 131	23
0001-158 524	77	0002-504 143	42, 59	0002-509 498	116	0002-608 353	29	0002-641 151	23
0001-158 525	77	0002-504 161	42, 59	0002-509 562	50, 66	0002-608 354	29	0002-641 181	23
0001-179 097	82	0002-504 162	42, 59	0002-509 563	50, 66	0002-611 131	23	0002-641 351	23
0001-179 297	82	0002-504 163	42, 59	0002-509 564	50, 66	0002-611 151	23	0002-653 131	23
0001-261 173	83	0002-504 332	42, 60	0002-509 908	116	0002-613 141	30	0002-653 151	23
0001-401 912	54	0002-504 341	42, 60	0002-511 161	110	0002-613 142	30	0002-653 181	23
0001-432 603	76	0002-504 342	42, 60	0002-512 061	34	0002-613 143	30	0002-653 351	23
0001-432 604	76	0002-504 343	42, 60	0002-512 062	34	0002-613 144	30	0002-664 131	109
0001-432 613	76	0002-504 361	42, 60	0002-512 161	34	0002-613 145	30	0002-664 151	109
0001-432 614	76	0002-504 362	42, 60	0002-512 162	34	0002-613 146	30	0002-664 152	109
0001-432 623	76	0002-504 363	42, 60	0002-512 342	34	0002-613 161	30	0002-664 181	109
0001-432 624	76	0002-504 542	42, 60	0002-512 361	34	0002-613 162	30	0002-676 131	109
0002-056 011	127	0002-505 132	42, 59	0002-512 362	34	0002-613 163	30	0002-676 151	109
0002-056 012	127	0002-505 141	42, 59	0002-514 161	34	0002-613 164	30	0002-676 181	109
0002-056 013	127	0002-505 142	42, 59	0002-514 341	34	0002-613 165	30	0002-686 131	109
0002-056 014	127	0002-505 161	42, 59	0002-514 361	34	0002-613 166	30	0002-686 151	109
0002-056 015	127	0002-505 162	42, 59	0002-522 141	110	0002-613 193	30	0002-686 181	109
0002-056 016	127	0002-505 332	42, 60	0002-522 161	110	0002-613 194	30	0002-808 100	126
0002-056 017	127	0002-505 341	42, 60	0002-522 341	110	0002-613 195	30	0002-808 125	125
0002-056 018	127	0002-505 342	42, 60	0002-522 361	110	0002-613 196	30	0002-808 130	125
0002-056 311	127	0002-505 343	42, 60	0002-532 161	110	0002-613 361	30	0002-808 132	125
0002-056 312	127	0002-505 361	42, 60	0002-532 361	110	0002-613 362	30	0002-808 135	125
0002-056 313	127	0002-505 362	42, 60	0002-544 141	110	0002-613 363	30	0002-808 136	125
0002-056 314	127	0002-505 363	42, 60	0002-544 161	110	0002-613 364	30	0002-808 138	125
0002-056 315	127	0002-505 542	42, 60	0002-544 341	110	0002-621 131	23	0002-808 140	125

Order-No.	Page	Order-No.	Page	Order-No.	Page	Order-No.	Page	Order-No.	Page
0002-808 144	125	0003-056 418	127	0003-810 150	126	0008-600 221	43	0034-906 954	144
0002-808 150	125	0003-056 425	127	0003-810 157	126	0008-600 321	43	0034-906 955	144
0002-808 163	126	0003-056 427	127	0003-810 163	126	0008-600 361	48	0034-906 962	144
0002-808 175	126	0003-056 428	127	0003-810 169	126	0008-600 411	43	0034-906 963	144
0002-812 215	125	0003-056 429	127	0003-810 175	126	0008-600 421	43	0042-576 165	113
0002-812 218	125	0003-056 432	127	0003-810 182	126	0008-600 422	43	0042-576 175	113
0002-812 220	125	0003-056 435	127	0003-815 210	125	0008-600 432	43	0042-576 365	113
0002-815 212	125	0003-056 436	127	0003-816 204	130	0008-600 511	43	0042-576 375	113
0002-815 214	125	0003-056 438	127	0003-816 205	130	0008-600 521	43	0043-003 010	61
0002-816 215	130	0003-056 441	127	0003-816 206	130	0008-600 522	43	0043-003 015	61
0002-816 218	130	0003-056 442	127	0003-816 208	130	0008-600 531	43	0043-004 015	61
0002-816 220	130	0003-056 444	127	0003-816 210	130	0008-600 811	48	0043-004 020	61
0002-816 225	130	0003-056 447	127	0003-816 212	130	0008-600 821	48	0043-005 015	61
0002-816 315	130	0003-056 450	127	0003-816 304	130	0008-600 832	48	0043-005 020	61
0002-816 318	130	0003-075 064	117	0003-816 305	130	0008-600 911	48	0043-005 030	61
0002-816 320	130	0003-075 065	117	0003-816 306	130	0008-600 921	48	0043-006 020	61
0002-816 325	130	0003-075 066	117	0003-816 308	130	0008-852 002	128	0043-006 030	61
0002-816 515	130	0003-075 067	117	0003-816 310	130	0008-852 003	128	0043-006 040	61
0002-816 518	130	0003-075 068	117	0003-816 312	130	0008-852 004	128	0043-006 050	61
0002-816 520	130	0003-075 069	117	0003-816 504	130	0008-852 005	128	0043-008 030	61
0002-816 525	130	0003-075 070	117	0003-816 505	130	0008-852 006	128	0043-008 040	61
0002-819 110	126	0003-075 071	117	0003-816 506	130	0008-852 007	128	0043-008 050	61
0002-824 213	131	0003-075 073	117	0003-816 508	130	0008-852 008	128	0043-010 100	71
0002-825 213	131	0003-075 252	80, 130	0003-816 510	130	0008-852 009	128	0043-160 050	106
0002-825 214	131	0003-075 253	80, 130	0003-816 512	130	0008-852 010	128	0063-003 010	61
0002-825 216	131	0003-075 254	80, 130	0003-816 804	130	0008-852 012	128	0063-003 015	61
0002-892 215	81, 129	0003-075 255	80, 130	0003-816 805	130	0008-852 015	128	0063-004 015	61
0002-892 220	81, 129	0003-086 102	86	0003-816 806	130	0008-852 017	128	0063-004 020	61
0002-892 225	81, 129	0003-086 103	86	0003-816 808	130	0008-852 019	128	0063-004 030	61
0002-911 941	45	0003-086 104	86	0003-816 810	130	0008-852 022	128	0063-005 015	61
0002-911 951	45	0003-086 105	86	0003-816 812	130	0008-852 025	128	0063-005 020	61
0002-921 874	26	0003-102 950	84	0003-816 815	130	0008-852 802	128	0063-005 030	61
0002-921 875	26	0003-102 960	84	0003-816 818	130	0008-852 803	128	0063-006 020	61
0002-921 876	26	0003-102 990	84	0003-816 820	130	0008-852 804	128	0063-006 030	61
0002-921 889	26	0003-133 573	79	0003-816 825	130	0008-852 805	128	0063-006 040	61
0002-930 821	49	0003-140 101	81	0003-999 026	85	0008-852 806	128	0063-006 050	61
0002-930 902	52	0003-140 102	81	0003-999 027	85	0008-852 807	128	0063-008 030	61
0002-930 907	52	0003-162 133	78	0004-000 127	56	0008-852 808	128	0063-008 040	61
0002-930 912	52	0003-162 333	78	0004-102 925	84	0008-852 809	128	0063-008 050	61
0003-000 001	84	0003-165 584	78	0004-401 052	54	0008-852 810	128	0063-010 100	71
0003-000 100	56	0003-165 964	78	0004-401 132	54	0008-852 812	128	0063-160 050	106
0003-000 130	56	0003-509 141	50, 66	0004-401 942	54	0008-852 815	128	0063-404 020	62
0003-000 222	35	0003-509 149	65	0004-509 302	67	0008-852 817	128	0063-404 030	62
0003-000 223	35, 117	0003-509 161	50, 66	0004-906 954	144	0008-852 819	128	0063-405 020	62
0003-000 242	35, 117	0003-509 169	65	0004-906 955	144	0008-852 822	128	0063-405 030	62
0003-000 243	35, 117	0003-509 191	50, 66	0004-906 962	144	0008-852 825	128	0063-405 040	62
0003-000 244	35, 117	0003-509 341	50, 66	0004-906 963	144	0011-261 173	83	0063-406 030	62
0003-056 010	127	0003-509 349	65	0008-432 573	79	0011-401 912	54	0063-406 040	62
0003-056 306	127	0003-509 361	50, 66	0008-447 573	75	0014-509 102	67	0063-406 050	62
0003-056 307	127	0003-509 369	65	0008-447 574	75	0014-509 304	67	0063-408 040	62
0003-056 308	127	0003-509 561	50, 66	0008-462 091	75	0018-852 002	128	0063-408 050	62
0003-056 310	127	0003-515 827	110	0008-462 133	75	0018-852 003	128	0063-410 100	71
0003-056 326	127	0003-600 211	43	0008-462 134	75	0018-852 802	128	0074-509 301	67
0003-056 327	127	0003-600 311	43	0008-462 291	75	0018-852 803	128	0083-003 010	61
0003-056 328	127	0003-810 100	126	0008-462 391	75	0023-179 197	82	0083-003 015	61
0003-056 330	127	0003-810 125	126	0008-462 591	75	0023-600 851	48	0083-004 015	61
0003-056 400	127	0003-810 128	126	0008-493 100	80, 131	0023-600 951	48	0083-004 020	61
0003-056 403	127	0003-810 130	126	0008-509 161	51	0024-509 100	67	0083-004 030	61
0003-056 406	127	0003-810 132	126	0008-509 162	51	0024-509 101	67	0083-005 015	61
0003-056 409	127	0003-810 138	126	0008-509 163	51	0024-509 102	67	0083-005 020	61
0003-056 412	127	0003-810 140	126	0008-509 164	51	0024-509 103	67	0083-005 030	61
0003-056 415	127	0003-810 144	126	0008-509 363	51	0024-509 111	67	0083-006 020	61



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Index

Order-No.	Page	Order-No.	Page	Order-No.	Page	Order-No.	Page	Order-No.	Page
0083-006 030	61	0103-075 325	118	0182-600 591	46	0402-631 151	23	0904-905 896	143
0083-006 040	61	0114-906 000	143	0182-600 891	49	0402-631 331	23	0904-905 899	143
0083-006 050	61	0123-003 010	61	0182-600 991	49	0402-631 351	23	0908-507 061	44
0083-008 030	61	0123-003 015	61	0183-003 010	61	0442-514 361	34	0914-905 825	143
0083-008 040	61	0123-004 015	61	0183-003 015	61	0442-608 351	27	0924-905 822	143
0083-008 050	61	0123-004 020	61	0183-004 015	61	0442-608 353	29	0924-905 823	143
0083-010 100	71	0123-004 030	61	0183-004 020	61	0442-608 354	29	0924-905 825	143
0083-160 050	106	0123-005 015	61	0183-005 015	61	0442-613 361	30	1003-086 438	86
0083-304 020	62	0123-005 020	61	0183-005 020	61	0442-613 362	30	1003-086 450	86
0083-304 030	62	0123-005 030	61	0183-005 030	61	0442-613 363	30	1004-608 151	47
0083-305 030	62	0123-006 020	61	0183-006 020	61	0442-613 364	30	1103-819 110	126
0083-305 040	62	0123-006 030	61	0183-006 030	61	0442-622 351	33	1132-819 110	126
0083-306 030	62	0123-006 040	61	0183-006 040	61	0442-632 351	33	1201-901 924	138
0083-306 050	62	0123-006 050	61	0183-006 050	61	0802-600 491	46	1202-509 912	53
0083-308 050	62	0123-008 030	61	0183-008 030	61	0802-600 591	46	1202-509 913	53
0083-310 100	71	0123-008 040	61	0183-008 040	61	0802-600 891	49	1202-509 914	53
0083-404 020	62	0123-008 050	61	0183-008 050	61	0802-600 991	49	1202-631 131	25
0083-404 030	62	0123-010 100	71	0183-010 100	71	0802-608 133	29	1202-631 151	25
0083-405 020	62	0123-160 050	106	0183-310 100	71	0802-608 134	29	1202-653 131	25
0083-405 030	62	0123-410 100	71	0183-410 100	71	0802-608 135	29	1202-653 151	25
0083-405 040	62	0124-509 101	67	0202-611 131	41, 59	0802-608 153	29	1203-300 003	93, 104
0083-406 030	62	0124-509 103	67	0202-611 151	41, 59	0802-608 154	29	1203-600 000	91
0083-406 040	62	0124-509 111	67	0202-611 351	41, 59	0802-608 155	29	1203-600 001	92
0083-406 050	62	0124-509 303	67	0214-906 000	143	0802-608 183	29	1203-600 002	92
0083-408 040	62	0124-906 000	143	0224-509 101	67	0802-608 184	29	1212-631 131	25
0083-408 050	62	0144-906 000	143	0224-906 000	143	0802-608 185	29	1212-631 151	25
0083-410 100	71	0153-003 010	61	0243-003 010	61	0802-613 142	30	1213-300 003	93, 104
0088-600 221	43	0153-003 015	61	0243-003 015	61	0802-613 143	30	1224-509 101	67
0088-600 521	43	0153-004 015	61	0243-004 015	61	0802-613 144	30	1243-404 020	62
0102-512 161	34	0153-004 020	61	0243-004 020	61	0802-613 146	30	1243-404 030	62
0102-512 162	34	0153-005 015	61	0243-005 015	61	0802-613 162	30	1243-405 020	62
0102-512 342	34	0153-005 020	61	0243-005 020	61	0802-613 163	30	1243-405 030	62
0102-512 362	34	0153-005 030	61	0243-005 030	61	0802-613 164	30	1243-405 040	62
0102-608 131	27	0153-006 020	61	0243-006 020	61	0802-613 165	30	1243-406 030	62
0102-608 151	27	0153-006 030	61	0243-006 030	61	0802-613 166	30	1243-406 040	62
0102-608 331	27	0153-006 040	61	0243-006 040	61	0802-613 194	30	1243-406 050	62
0102-608 351	27	0153-006 050	61	0243-006 050	61	0802-613 195	30	1243-408 040	62
0102-613 141	30	0153-008 030	61	0243-008 030	61	0802-613 196	30	1243-408 050	62
0102-613 142	30	0153-008 040	61	0243-008 040	61	0802-613 362	30	1302-753 368	114
0102-613 161	30	0153-008 050	61	0243-008 050	61	0802-613 363	30	1402-631 131	23
0102-613 162	30	0153-304 020	62	0243-010 100	71	0802-632 131	33	1402-631 151	23
0102-622 131	33	0153-304 030	62	0243-304 020	62	0802-632 151	33	1402-631 331	23
0102-622 151	33	0153-305 030	62	0243-304 030	62	0802-632 331	33	1402-631 351	23
0102-622 331	33	0153-305 040	62	0243-305 030	62	0802-632 351	33	1418-600 005	55
0102-622 351	33	0153-306 030	62	0243-305 040	62	0812-509 913	52	1503-015 085	94
0103-075 021	117	0153-306 050	62	0243-306 030	62	0901-151 093	77	1518-600 005	55
0103-075 027	117	0153-308 050	62	0243-306 050	62	0901-151 094	77	1601-604 914	135
0103-075 028	117	0153-404 020	62	0243-308 050	62	0901-151 095	77	1602-608 131	27
0103-075 048	117	0153-404 030	62	0244-906 000	143	0901-151 593	77	1602-608 151	27
0103-075 050	117	0153-405 020	62	0254-906 000	143	0901-151 594	77	1602-608 331	27
0103-075 210	118	0153-405 030	62	0264-906 000	143	0901-151 595	77	1602-613 142	30
0103-075 213	118	0153-405 040	62	0274-906 000	143	0901-152 333	77	1602-613 161	30
0103-075 216	118	0153-406 030	62	0281-307 095	82	0901-152 334	77	1602-613 162	30
0103-075 220	118	0153-406 040	62	0283-310 100	71	0901-152 335	77	1602-613 361	30
0103-075 225	118	0153-406 050	62	0323-304 020	62	0904-905 822	143	1602-613 362	30
0103-075 230	118	0153-408 040	62	0323-304 030	62	0904-905 824	143	1602-622 151	33
0103-075 232	118	0153-408 050	62	0323-305 030	62	0904-905 825	143	1602-632 151	33
0103-075 235	118	0154-906 000	143	0323-305 040	62	0904-905 837	143	1718-509 163	51
0103-075 240	118	0164-906 000	143	0323-306 030	62	0904-905 847	143	1802-509 911	53
0103-075 313	118	0174-906 000	143	0323-306 050	62	0904-905 856	143	1802-509 912	53
0103-075 316	118	0181-110 924	85	0323-308 050	62	0904-905 859	143	1802-509 913	53
0103-075 320	118	0182-600 491	46	0402-631 131	23	0904-905 869	143	1802-509 914	53

Order-No.	Page	Order-No.	Page	Order-No.	Page	Order-No.	Page	Order-No.	Page
1802-607 914	32	2401-902 926	138	4001-901 926	138	6152-631 131	23	7182-600 991	50
1802-608 914	32	2812-522 051	26	4001-902 924	138	6171-604 916	135	7202-611 151	41
1812-509 913	52	2902-632 151	33	4001-902 926	138	6201-604 914	135	7601-306 095	82
1903-080 101	94	2906-026 501	24	4021-604 918	135	6201-902 924	138	7602-743 378	114
1903-080 290	94	3002-504 342	43	4102-921 051	26	6231-604 914	135	7702-921 875	26
1903-100 101	94	3101-604 914	135	4306-026 904	23	6301-604 913	137	7801-401 912	55
1903-100 290	94	3101-604 916	135	4341-604 916	135	6303-604 000	136	7802-509 913	53
1911-901 926	138	3111-604 913	135	4403-022 130	98, 106	6311-604 913	137	7802-600 491	46
1922-075 000	136	3111-604 916	135	4602-626 131	23	6321-604 913	137	7802-600 591	46
2008-512 061	34	3131-604 916	135	4602-626 331	23	6401-604 912	137	7802-600 891	50
2008-512 161	34	3141-604 916	137	4602-743 178	114	6402-608 914	32	7802-600 991	50
2008-608 131	29	3151-604 913	135	4612-626 331	23	6412-608 914	32	7811-401 912	55
2008-608 151	29	3161-604 916	137	4802-622 131	33	6501-604 912	137	7812-509 913	53
2008-608 152	29	3181-604 916	137	4802-622 331	33	6511-604 919	135	8103-800 224	93, 104
2008-608 153	29	3201-604 916	135	4802-703 052	72	6601-604 912	137	8203-100 914	93
2008-608 154	29	3202-509 911	53	4802-703 062	72	6621-604 916	137	8203-100 925	93
2008-608 184	29	3202-509 912	53	4902-613 561	30	6631-604 916	137	8203-100 934	104
2008-613 061	31	3202-509 913	53	4902-613 562	30	6641-604 916	137	8203-100 936	104
2008-613 062	31	3202-509 914	53	4902-613 563	30	6651-604 916	137	8203-100 944	93
2008-613 063	31	3211-604 916	135	4902-626 651	23	6661-604 916	137	8203-100 947	104
2008-613 064	31	3221-604 914	135	4902-631 351	23	6701-604 912	135	8203-150 914	93
2008-613 065	31	3231-604 916	135	4902-653 351	23	6721-604 916	137	8203-150 925	93
2008-613 161	31	3241-604 916	137	4912-613 561	30	6751-604 916	137	8203-150 934	104
2008-613 162	31	3261-604 916	137	4912-613 564	30	6761-604 916	137	8203-150 936	104
2008-613 163	31	3281-604 916	137	4912-631 351	23	6771-604 916	137	8203-150 944	93
2008-613 164	31	3301-462 122	76	4933-604 000	136	6781-604 916	137	8203-150 947	104
2008-613 165	31	3301-462 162	76	5002-075 000	136	6801-604 916	137	8203-200 914	93
2008-631 151	23	3301-462 562	76	5162-507 361	42, 60	6811-604 916	137	8203-200 925	93
2102-576 916	113	3303-140 101	81	5262-613 141	30	6821-604 916	137	8203-200 934	104
2103-000 461	101	3311-604 913	135	5401-401 913	27	6831-604 916	137	8203-200 936	104
2103-002 101	101	3311-604 916	135	5402-921 051	26	6841-604 916	137	8203-200 947	104
2103-002 102	101	3321-604 914	135	5402-921 873	25	6901-902 926	138	8211-201 944	93
2103-005 333	101	3341-604 916	135	5411-401 913	27	6912-613 561	37	8411-604 918	135
2103-007 012	101	3351-604 916	137	5411-604 912	135	6912-613 891	37	8601-411 912	72
2103-080 101	94	3371-604 916	137	5421-401 913	27	6912-622 891	38	8603-600 004	91
2103-080 290	94	3391-604 916	137	5431-604 912	135	6931-401 912	72	8603-600 010	91
2103-100 101	94	3401-604 914	135	5431-604 914	137	6941-401 912	72	8611-411 912	72
2103-100 290	94	3401-604 916	135	5441-604 912	135	6951-401 912	72	8641-411 912	72
2103-100 914	93	3411-604 916	135	5441-604 914	137	6961-401 912	72	8802-753 478	114
2103-100 925	93	3431-604 916	135	5495-560 051	114	7002-504 362	43	8812-607 914	32
2103-100 944	93	3441-604 916	137	5495-560 052	114	7002-505 162	43	9301-614 916	32
2118-631 151	23	3461-604 916	137	5495-560 054	114	7002-505 542	43	9311-614 916	32
2202-631 151	23	3481-604 916	137	5495-560 080	114	7002-507 142	43	9321-614 916	32
2202-631 331	23	3602-075 000	136	5495-560 082	114	7002-507 162	43	9331-614 916	32
2202-631 351	23	3602-632 131	33	5501-604 913	137	7002-507 342	43	9502-626 251	23
2211-604 914	135	3602-632 331	33	5501-604 914	137	7002-507 362	43	9502-626 301	23
2224-509 101	67	3602-632 351	33	5511-604 913	137	7003-507 061	45	9502-626 311	23
2312-607 914	32	3603-604 000	136	5511-604 914	137	7003-600 221	44	9502-626 501	23
2352-512 161	34	3612-075 000	136	5521-604 913	137	7003-600 421	44	9502-626 651	23
2352-512 162	34	3613-604 000	136	5521-604 914	137	7003-600 521	44	9502-664 151	23
2352-512 342	34	3622-075 000	136	5601-604 914	137	7003-600 821	48	9602-075 000	136
2352-512 362	34	3633-604 000	136	5611-604 914	137	7003-600 921	48	9706-026 904	24
2352-608 131	27	3642-075 000	136	5621-604 914	137	7004-608 151	47	9711-104 925	84
2352-608 151	27	3652-075 000	136	5652-613 142	30	7008-509 363	51	9802-026 560	109
2352-608 331	27	3692-075 000	136	5652-613 162	30	7008-600 361	48	9802-026 561	109
2352-608 351	27	3892-608 131	27	5702-509 938	116	7008-600 832	48	9802-026 562	109
2352-622 151	33	3901-411 912	72	5791-604 914	137	7012-611 351	41	9802-026 563	109
2352-622 351	33	3902-613 161	31	5901-604 918	135	7018-600 521	44	9802-026 581	109
2401-604 919	135	3902-613 163	31	6001-901 924	138	7022-506 142	43	9802-026 582	109
2401-901 924	138	3902-613 164	31	6001-901 926	138	7182-600 491	46	9802-026 583	109
2401-901 926	138	3912-613 163	31	6001-902 924	138	7182-600 591	46	9802-921 873	25
2401-902 924	138	4001-901 924	138	6001-902 926	138	7182-600 891	50	9802-921 875	25



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

Index

Order-No.	Page								
9803-523 056	72	9838-036 318	128	9902-543 542	112	9902-576 342	112	9906-015 052	115
9803-523 346	72	9838-036 320	128	9902-543 543	112	9902-576 343	112	9906-015 053	115
9803-630 101	65	9838-036 322	128	9902-543 562	112	9902-576 362	112	9906-015 056	115
9803-630 151	65	9838-036 325	128	9902-543 563	112	9902-576 363	112	9906-015 057	115
9803-630 171	65	9838-036 328	128	9902-544 142	111	9902-576 464	111	9906-015 058	115
9803-630 301	65	9838-036 330	128	9902-544 162	111	9902-586 142	112	9906-015 059	115
9803-630 351	65	9838-036 332	128	9902-544 163	111	9902-586 162	112	9906-015 062	115
9803-630 371	65	9838-036 335	128	9902-544 193	111	9902-586 163	112	9906-015 063	115
9812-921 873	25	9838-036 345	128	9902-544 341	112	9902-586 342	112	9906-015 064	115
9812-921 875	25	9838-036 348	128	9902-544 342	112	9902-586 343	112	9906-015 065	115
9818-036 309	128	9838-036 351	128	9902-544 361	112	9902-586 362	112	9906-015 069	115
9818-036 310	128	9838-036 355	128	9902-544 362	112	9902-586 363	112	9906-015 070	115
9818-036 311	128	9838-036 357	128	9902-544 441	111	9902-587 142	111	9906-015 071	115
9818-036 312	128	9838-036 360	128	9902-544 461	111	9902-587 143	111	9906-015 079	115
9818-036 313	128	9841-604 913	135	9902-544 491	111	9902-587 162	111	9906-015 080	115
9818-036 316	128	9902-511 162	111	9902-553 162	112	9902-587 163	111	9906-015 081	115
9818-036 318	128	9902-511 362	112	9902-553 163	112	9902-587 192	111	9906-015 082	115
9818-036 320	128	9902-515 001	116	9902-553 342	112	9902-587 193	111	9906-021 059	111
9818-036 322	128	9902-515 002	116	9902-553 362	112	9902-587 342	112	9906-021 183	111
9818-036 325	128	9902-515 003	116	9902-553 542	112	9902-587 343	112	9906-021 184	111
9818-036 327	128	9902-515 004	116	9902-553 562	112	9902-587 362	112	9906-022 081	111
9818-036 328	128	9902-515 025	116	9902-554 142	111	9902-587 363	112	9906-022 082	111
9818-036 330	128	9902-515 026	116	9902-554 162	111	9906-011 146	60	9906-022 085	111
9818-036 332	128	9902-515 027	116	9902-554 163	111	9906-011 147	60	9906-026 011	24
9818-036 335	128	9902-515 028	116	9902-554 192	111	9906-011 148	60	9906-026 012	24
9818-036 338	128	9902-515 040	116	9902-554 341	112	9906-011 149	60	9906-026 051	24
9818-036 341	128	9902-515 041	116	9902-554 361	112	9906-011 150	60	9906-026 053	24
9818-036 345	128	9902-515 042	116	9902-554 362	112	9906-011 151	60	9906-026 116	24
9818-036 348	128	9902-515 043	116	9902-554 441	111	9906-011 153	60	9906-026 117	24
9818-036 351	128	9902-515 050	116	9902-554 461	111	9906-011 154	60	9906-026 247	24
9818-036 354	128	9902-515 051	116	9902-565 142	112	9906-011 155	60	9906-026 248	24
9818-036 357	128	9902-515 052	116	9902-565 143	112	9906-011 446	60	9906-026 280	24
9818-036 360	128	9902-515 053	116	9902-565 162	112	9906-011 447	60	9906-026 281	24
9818-036 364	128	9902-515 056	116	9902-565 163	112	9906-011 448	60	9906-026 500	24
9828-036 308	128	9902-515 057	116	9902-565 342	112	9906-011 449	60	9906-026 501	24
9828-036 309	128	9902-515 058	116	9902-565 362	112	9906-011 450	60	9906-030 302	63
9828-036 310	128	9902-515 062	116	9902-565 542	112	9906-011 451	60	9906-030 304	63
9828-036 311	128	9902-515 063	116	9902-565 562	112	9906-011 453	60	9906-030 305	63
9828-036 312	128	9902-515 064	116	9902-566 142	111	9906-011 454	60	9906-030 308	63
9828-036 313	128	9902-515 065	116	9902-566 143	111	9906-011 455	60	9906-030 310	63
9828-036 316	128	9902-515 069	116	9902-566 162	111	9906-013 008	111	9906-030 311	63
9828-036 318	128	9902-515 079	116	9902-566 163	111	9906-013 009	111	9906-030 312	63
9828-036 320	128	9902-515 080	116	9902-566 192	111	9906-013 021	111	9906-030 314	63
9828-036 322	128	9902-515 081	116	9902-566 193	111	9906-013 057	111	9906-030 316	63
9828-036 325	128	9902-515 082	116	9902-566 341	112	9906-015 001	115	9906-030 317	63
9828-036 327	128	9902-522 142	111	9902-566 342	112	9906-015 002	115	9906-030 318	63
9828-036 328	128	9902-522 162	111	9902-566 361	112	9906-015 003	115	9906-030 326	64
9828-036 330	128	9902-522 163	111	9902-566 362	112	9906-015 004	115	9906-030 328	64
9828-036 332	128	9902-522 342	112	9902-566 363	112	9906-015 025	115	9906-030 329	64
9828-036 335	128	9902-522 362	112	9902-566 441	111	9906-015 026	115	9906-030 332	64
9828-036 338	128	9902-522 363	112	9902-566 461	111	9906-015 027	115	9906-030 334	64
9828-036 341	128	9902-532 142	111	9902-566 491	111	9906-015 028	115	9906-030 335	64
9828-036 345	128	9902-532 162	111	9902-575 142	112	9906-015 035	115	9906-030 338	64
9828-036 348	128	9902-532 163	111	9902-575 162	112	9906-015 036	115	9906-030 340	64
9828-036 351	128	9902-532 342	112	9902-575 163	112	9906-015 037	115	9906-030 341	64
9828-036 354	128	9902-532 343	112	9902-575 342	112	9906-015 038	115	9906-030 488	68
9828-036 357	128	9902-532 362	112	9902-576 142	111	9906-015 040	115	9906-030 489	68
9828-036 360	128	9902-532 363	112	9902-576 143	111	9906-015 041	115	9906-030 490	68
9828-036 364	128	9902-543 142	112	9902-576 162	111	9906-015 042	115	9906-030 492	68
9838-036 311	128	9902-543 162	112	9902-576 163	111	9906-015 043	115	9906-030 493	68
9838-036 313	128	9902-543 163	112	9902-576 192	111	9906-015 050	115	9906-030 494	68
9838-036 315	128	9902-543 362	112	9902-576 193	111	9906-015 051	115	9906-030 496	68

Order-No.	Page	Order-No.	Page	Order-No.	Page	Order-No.	Page
9906-030 497	68	9907-036 062	125	9946-015 058	115	L15452433E	105
9906-030 498	68	9907-036 063	125	9946-015 059	115	L15452448A	105
9906-030 500	68	9907-036 067	125	9962-515 056	116	L15452448E	105
9906-030 501	68	9907-036 072	125	9962-515 057	116	L50452008E	105
9906-030 502	68	9907-036 073	125	9962-515 058	116	L50901408A	105
9906-033 016	28	9907-036 082	125	9962-515 059	116	L50901408E	105
9906-033 021	28	9907-036 093	125	9962-515 062	116	L50901431A	105
9906-033 022	28	9907-036 139	125	9962-515 063	116	L50901431E	105
9906-033 030	28	9907-036 147	125	9962-515 064	116	L50902448A	105
9906-033 031	28	9907-036 151	125	9962-515 065	116	L50902448E	105
9906-033 125	28	9907-036 155	125	9966-015 063	115	L669002101	101
9906-033 126	28	9907-036 156	125	9966-015 064	115	L669002102	101
9907-035 000	124	9907-036 163	125	9966-015 065	115	L68013206J	105
9907-035 021	124	9907-036 164	125	L000000962	96	L68014192A	105
9907-035 023	124	9907-036 172	125	L000002066	98, 106	L68014192E	105
9907-035 031	124	9907-036 179	125	L000006338	96	L699740250	100
9907-035 032	124	9907-036 187	125	L000014507	105	L699740340	100
9907-035 041	124	9907-036 188	125	L000020899	98	L699940250	100
9907-035 042	124	9907-036 204	125	L000042624	105	L699940260	100
9907-035 051	124	9907-036 302	129	L000044060	98, 106	L699940320	100
9907-035 052	124	9907-036 303	129	L012021292	97	L699940340	100
9907-035 061	124	9907-036 304	129	L012021660	97	L779000175	102
9907-035 062	124	9907-036 305	129	L012021731	97	L779000433	102
9907-035 081	124	9907-036 306	129	L012022230	97	L779000462	102
9907-035 082	124	9907-036 307	129	L012022404	97	L779000466	102
9907-035 083	124	9907-036 308	129	L012022573	97	L779001385	102
9907-035 086	124	9907-036 309	129	L012022605	97	L779005333	102
9907-035 087	124	9907-036 310	129	L013010167	97	L779007012	102
9907-035 088	124	9907-036 311	129	L013030179	96	L779009510	102
9907-035 092	124	9907-036 312	129	L013030901	96	L779132001	102
9907-035 093	124	9907-036 313	129	L013030989	96	L779191001	102
9907-035 096	124	9907-036 314	129	L013033828	96	L779840010	102
9907-035 097	124	9907-036 315	129	L013300214	96	L779840130	102
9907-035 098	124	9907-036 316	129	L013300348	96	L779920160	102
9907-035 102	124	9907-036 317	129	L023060786	97	L779930401	102
9907-035 107	124	9907-036 318	129	L033440041	98	L800000008	98, 106
9907-035 117	124	9907-036 319	129	L033440201	98	L800000029	98, 106
9907-035 118	124	9907-036 320	129	L033440645	98	L800000046	98, 106
9907-035 127	124	9907-036 321	129	L043090792	96	L800000048	98, 106
9907-035 128	124	9907-036 322	129	L043310025	96	L800000055	98, 106
9907-035 137	124	9907-036 323	129	L043310047	96	L800000066	98, 106
9907-035 138	124	9907-036 478	129	L043310093	96	L800000084	98, 106
9907-035 181	124	9907-036 482	129	L043310189	96	L800000119	98, 106
9907-035 197	124	9907-036 483	129	L063330127	106	L800000126	98, 106
9907-035 205	124	9907-036 484	129	L063330132	106	L81545202E	105
9907-035 213	124	9907-036 486	129	L063330245	106	L81545231E	105
9907-035 221	124	9907-036 487	129	L063800137	105	L81545247E	105
9907-035 229	124	9907-036 488	129	L063800214	105	L911000436	95
9907-036 012	125	9907-036 489	129	L063800259	105	L940030842	95
9907-036 017	125	9907-036 490	129	L063800261	105	L960030577	104
9907-036 022	125	9907-036 491	129	L063800285	105		
9907-036 023	125	9908-608 132	28	L063800288	105		
9907-036 027	125	9908-608 152	28	L068011347	105		
9907-036 032	125	9916-015 026	115	L113010743	97		
9907-036 033	125	9916-015 041	115	L113010744	97		
9907-036 037	125	9916-015 051	115	L113010745	97		
9907-036 042	125	9916-015 057	115	L113010746	97		
9907-036 043	125	9916-015 069	115	L15451408A	105		
9907-036 047	125	9918-608 132	28	L15451408E	105		
9907-036 052	125	9918-608 152	28	L15451431A	105		
9907-036 053	125	9946-015 056	115	L15451431E	105		
9907-036 057	125	9946-015 057	115	L15452433A	105		



Items available immediately from stock are printed in bold type.
Please contact us for other sizes/materials: service@osborn.de

OTHER CATALOGUES FOR DOWNLOAD

**IT'S THIS
EASY:**

The easiest and quickest way to get our catalogues is to download them from our website.

If you have a smartphone or tablet, you can also scan the QR code and get to the catalogue overview page.



<http://www.osborn.de/en-de/support/literature.html>



TERMS AND CONTACT

TERMS:

For our terms and conditions, please consult our website.

If you have a smartphone or tablet you can also scan the QR code and get to the overview page.



<http://www.osborn.de/en-de/company/all-terms-and-conditions.html>

Osborn International

Rm. 612, Tower R, Huiyuan Int. Apartment
No. 8 Beichen East Road,
Chaoyang District
Beijing, 100101
China
Tel.: +86 1084986167
Fax: +86 1064993009
cnsales@osborn.com

Osborn-Dronco

Newhouse Farm Industrial Estate
Chepstow NP16 6UD
Großbritannien
Tel.: +44 1291643200
Fax: +44 1291643298
sales@osborn.co.uk

Osborn International AB

Huskvarnavägen 105
56123 Huskvarna
Schweden
Tel.: +46 36389200
Fax: +46 36133190
info@osborn.se

Osborn International GmbH

Ringstrasse 10
35099 Burgwald
Deutschland
Tel.: +49 64515880
Fax: +49 6451588206
info@osborn.de

Osborn Lippert (India) Pvt. Ltd.

Plot No. E-66, MIDC Waluj
Aurangabad - 431136
Indien
Tel.: +91 2402556538
Fax: +91 2402552530
sales@osborn-lippert.co.in

Osborn Singapore Pte Ltd

206 Tuas South Avenue 2
West Point Bizhub
Singapore 637208
Singapur
Tel.: +65 6863 0318
Fax: +65 6863 4318
sales@osborn.com.sg

Osborn International GmbH

Betriebsstätte Haan
Rudolf-Harbig-Weg 10
42781 Haan
Deutschland
Tel.: +49 212993070
Fax: +49-2129930723
polishing@osborn.de

JacksonLea de Mexico

Emilio Cárdenas No. 211
Centro Industrial Tlalnepantla
Tlalnepantla Edo. México, 54030
Mexico
Tel.: +52 5555659255

Osborn - Unipol, S.L.

C/ Ronda Norte, 320
(Polígono Industrial) - Apartado 169
46470 Catarroja (Valencia)
Spanien
Tel.: +34 961325876
Fax: +34 961324602
ventas@osborn-unipol.es

DRONCO GmbH

Wiesenmühle 1
95632 Wunsiedel
Deutschland
Tel.: +49 92326090
Fax: +49 9232609159
info@dronco.com

Osborn Unipol Lda

Rua de Pardelhas
4805-062 Brito-Guimarães
Portugal
Tel.: +351 253479550
Fax: +351 253576629
osborn-unipol@osborn-unipol.pt

Osborn

2350 Salisbury Road North
Richmond, IN 47374
USA
Tel.: +1 (765) 965-5333
Fax: +1 (765) 935-0120
brushes@osborn.com

Osborn Unipol SAS

Parc Mail Bâtiment Orion
24B avenue de la Demi-Lune
CS 80006 - 95735 ROISSY CH. DE GAULLE CEDEX
Frankreich
Tel.: +33 134450600
Fax: +33 139936711
contact@osborn-unipol.fr

Osborn International SRL

Bd. Bucovina, Nr. 151
725300 Gura Humorului, jud. Suceava
Rumänien
Tel.: +40 230234212
Fax: +40 230531785
sales@osborn.ro



Because experts set the standard

General references:

The tools illustrated in this catalogue, the information given on quantities, appearance, properties and dimensions correspond to the data available at the time of printing. We are constantly improving our products, which are thus subject to alterations. In case of prices listed in this catalogue, all previous price lists will lose their validity with appearance of this catalogue.

Cutting | Grinding | Sanding

Dronco GmbH

Wiesenmühle 1
95632 Wunsiedel/Germany

Tel.: +49 (0) 92 32/609-0
Fax: +49 (0) 92 32/609-159
info@dronco.com
www.dronco.com

General Information:

The tools shown in this catalogue, information on scope of delivery, appearance, performance and specifications have been carefully collated and are correct at the time of going in to print. We are constantly developing our products, therefore the parts and prices shown can be subject to change.

Prices indicated in the new catalogue are now applicable and previously published prices lose their validity. All prices are per piece in Euros, excluding VAT, packaging, freight, carriage and insurance. Our general terms and conditions apply to all orders.

Osborn Sells Solutions

The Global Leader in
Surface Treatment Solutions and Finishing Tools

Osborn International GmbH

Ringstraße 10
35099 Burgwald/Germany

Tel.: +49 (64 51) 5 88-0
Fax: +49 (64 51) 5 88-206
info@osborn.de
www.osborn.de